

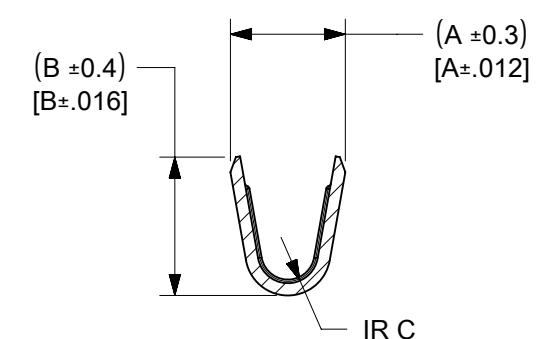


- NOTES:
1. MATERIAL: SEE CHART
 2. FINISH: SEE CHART
 3. PRODUCT SPECIFICATION: PS-5556-001, PS-5556-002, PS-5556-003
 4. PACKAGING SPECIFICATION: PK-5558-001 FOR CHAIN
PK-5556-003 FOR LOOSE
 5. MATES WITH TERMINAL: 5556 SERIES.
 6. APPLICABLE HOUSING: 5559, 30068, 42475 SERIES.
 7. THE NUMBER OF SERRATIONS TO BE ONE FOR WIRE RANGE #22-28.
 8. WHEN TERMINALS ARE INSTALLED IN THE HOUSING THE WIRES ARE TO BE DRESSED IN SUCH A MANNER TO ALLOW THE TERMINALS TO FLOAT FREELY IN THE POCKET.
 9. THIS TERMINAL IS DESIGNED FOR SINGLE WIRE CRIMPING.
 10. PART CONFORMS TO CLASS "B" REQUIREMENTS OF COSMATIC SPECIFICATION PS-45499-002.
 11. TEXT ON PART IS FOR REFERENCE ONLY. TEXT AND TEXT LOCATION MAY VARY DEPENDING ON PART NUMBER AND/OR TOOL.

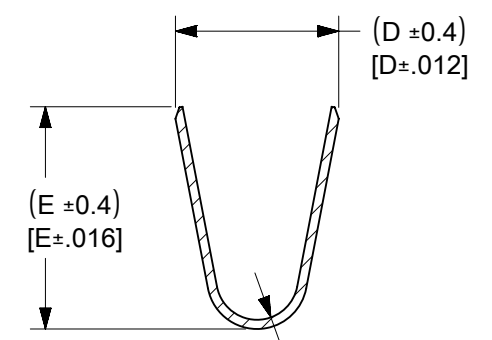

SECTION G-G

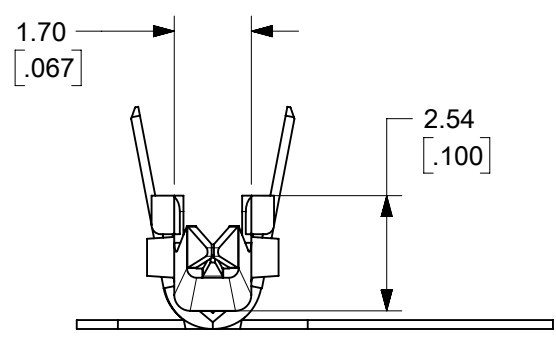

SECTION H-H

18-24 TERMINAL SHOWN

FUNCTIONAL SYMBOLS										THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION									
DIMENSION UNITS					SCALE					CURRENT REV DESC:									
mm/inch					NTS					EC NO: 660823									
GENERAL TOLERANCES (UNLESS SPECIFIED)										DRWN: VIJAYS4 2021/04/06									
4 PLACES ±					MM					INCH					CHK'D: YXZHENG 2021/04/14				
3 PLACES ±					± 0.01					APPR: YXZHENG 2021/04/14					INITIAL REVISION:				
2 PLACES ±					± 0.25					± 0.01					DRWN: H.HIRAMOTO 1991/03/12				
1 PLACE ±					± 0.25					±					APPR: FSMITH 2010/04/09				
0 PLACES ±					±					±					ANGULAR TOL ± 3.0°				
DIVISIONAL SYMBOLS										THIRD ANGLE PROJECTION									
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS										DRAWING SERIES MATERIAL NUMBER CUSTOMER SHEET NUMBER									
B-SIZE										5558 SEE SHEET 2 GENERAL MARKET 1 OF 2									

molex

MINI-FIT JR
OVERALL TIN MALE CRIMP TERMINAL

PRODUCT CUSTOMER DRAWING

DOCUMENT NUMBER: SD-5558XXXX | DOC TYPE: PSD | DOC PART: 001 | REVISION: L2

PLATING		MATERIAL	F	E	D	C	B	A	INS.RANGE	WIRE AWG RANGE		EDP NO.	ENG. NO.	FORM
REFLOWED MATTE TIN 0.00090/(.000035) MIN. (PREPLATE) (FINISH IS BRIGHT IN APPEARANCE, THICKNESS AS APPLIED PRIOR TO REFLOW)	PHOSPHOR BRONZE	$\frac{(0.9)}{.035}$	$\frac{(4.5)}{.177}$	$\frac{(3.6)}{.142}$	$\frac{(0.6)}{.024}$	$\frac{(2.7)}{.106}$	$\frac{(2.3)}{.091}$	$\varnothing \frac{(3.1)}{.122} \text{ MAX}$	16	N/A	39-00-0084	5558 PBT3L	LOOSE	
		$\frac{(0.6)}{.024}$	$\frac{(2.3)}{.091}$	$\frac{(2.3)}{.091}$	$\frac{(0.4)}{.016}$	$\frac{(1.65)}{.065}$	$\frac{(1.8)}{.071}$	$\varnothing \frac{(0.9 - 1.8)}{.035 - .071}$	22-28	20+20	39-00-0083	5558 PBT3	CHAIN	
		$\frac{(0.9)}{.035}$	$\frac{(4.5)}{.177}$	$\frac{(3.6)}{.142}$	$\frac{(0.5)}{.020}$	$\frac{(2.3)}{.091}$	$\frac{(1.9)}{.075}$	$\varnothing \frac{(1.3 - 3.1)}{.051 - .122}$	18-24	18+22				
	REFLOWED MATTE TIN 0.00090/(.000035) MIN OVER COPPER 0.00050/(.000020) MIN. (PREPLATE) (FINISH IS BRIGHT IN APPEARANCE, THICKNESS AS APPLIED PRIOR TO REFLOW)	BRASS	$\frac{(0.9)}{.035}$	$\frac{(4.5)}{.177}$	$\frac{(3.6)}{.142}$	$\frac{(0.6)}{.024}$	$\frac{(2.7)}{.106}$	$\frac{(2.3)}{.091}$	$\varnothing \frac{(3.1)}{.122} \text{ MAX}$	16	N/A	39-00-0082	5558 T3L	LOOSE
			$\frac{(0.6)}{.024}$	$\frac{(2.3)}{.091}$	$\frac{(2.3)}{.091}$	$\frac{(0.4)}{.016}$	$\frac{(1.65)}{.065}$	$\frac{(1.8)}{.071}$	$\varnothing \frac{(0.9 - 1.8)}{.035 - .071}$	22-28	20+20	39-00-0081	5558 T3	CHAIN
			$\frac{(0.9)}{.035}$	$\frac{(4.5)}{.177}$	$\frac{(3.6)}{.142}$	$\frac{(0.5)}{.020}$	$\frac{(2.3)}{.091}$	$\frac{(1.9)}{.075}$	$\varnothing \frac{(1.3 - 3.1)}{.051 - .122}$	18-24	22+22			
N/A		N/A	$\frac{(0.6)}{.024}$	$\frac{(2.3)}{.091}$	$\frac{(2.3)}{.091}$	$\frac{(0.4)}{.016}$	$\frac{(1.65)}{.065}$	$\frac{(1.8)}{.071}$	$\varnothing \frac{(0.9 - 1.8)}{.035 - .071}$	22-28	N/A	39-00-0049	5558 T2L	LOOSE
			$\frac{(0.9)}{.035}$	$\frac{(4.5)}{.177}$	$\frac{(3.6)}{.142}$	$\frac{(0.5)}{.020}$	$\frac{(2.3)}{.091}$	$\frac{(1.9)}{.075}$	$\varnothing \frac{(1.3 - 3.1)}{.051 - .122}$	18-24	N/A	39-00-0048	5558 T2	CHAIN
			$\frac{(0.9)}{.035}$	$\frac{(4.5)}{.177}$	$\frac{(3.6)}{.142}$	$\frac{(0.5)}{.020}$	$\frac{(2.3)}{.091}$	$\frac{(1.9)}{.075}$	$\varnothing \frac{(1.3 - 3.1)}{.051 - .122}$	18-24	N/A	39-00-0041	5558 TL	LOOSE
SINGLE WIRE	DOUBLE WIRE	$\frac{(0.9)}{.035}$	$\frac{(4.5)}{.177}$	$\frac{(3.6)}{.142}$	$\frac{(0.5)}{.020}$	$\frac{(2.3)}{.091}$	$\frac{(1.9)}{.075}$	$\varnothing \frac{(1.3 - 3.1)}{.051 - .122}$	18-24	N/A	39-00-0040	5558 T	CHAIN	

FUNCTIONAL SYMBOLS										THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION									
DIMENSION UNITS					SCALE					CURRENT REV DESC:									
mm/inch					NTS					EC NO: 660823									
GENERAL TOLERANCES (UNLESS SPECIFIED)										DRWN: VIJAYS4 2021/04/06									
4 PLACES ±					MM					INCH					CHK'D: YXZHENG 2021/04/14				
3 PLACES ±					± 0.01					APPR: YXZHENG 2021/04/14					INITIAL REVISION:				
2 PLACES ±					0.25 ± 0.01					DRWN: H.HIRAMOTO 1991/03/12					DOCUMENT NUMBER				
1 PLACE ±					0.25 ±					APPR: FSMITH 2010/04/09					SD-5558XXXX				
0 PLACES ±					±					ANGULAR TOL ± 3.0°					DOC TYPE DOC PART REVISION				
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS					THIRD ANGLE PROJECTION					DRAWING					SERIES				
					B-SIZE					5558					MATERIAL NUMBER				
															CUSTOMER				
															SEE TABLE				
															GENERAL MARKET				
															SHEET NUMBER				
															2 OF 2				

10 9 8 7 6 5 4 3 2 1

REFLOWED MATTE TIN 0.00090/(.000035)
MIN. (PREPLATE) (FINISH IS BRIGHT IN APPEARANCE,
THICKNESS AS APPLIED PRIOR TO REFLOW)

PHOSPHOR
BRONZE

(0.9) .035	(4.5) .177	(3.6) .142	(0.6) .024	(2.7) .106	(2.3) .091	∅ (3.1) .122 MAX.	# 16
(0.6) .024	(2.3) .091	(2.3) .091	(0.4) .016	(1.65) .065	(1.8) .071	∅ (0.9-1.8) .035-.071	#22-28
(0.9) .035	(4.5) .177	(3.6) .142	(0.5) .020	(2.3) .091	(1.9) .075	∅ (1.3-3.1) .051-.122	#18-24

39-00-0084	5558 PBT3L	LOOSE
↑ -0083	↑ PBT3	CHAIN
-0068	PBT2L	LOOSE
-0067	PBT2	CHAIN
-0062	PBTL	LOOSE
-0061	PBT	CHAIN

REFLOWED MATTE TIN 0.00090/(.000035)
MIN OVER COPPER 0.00050/(.000020)
MIN. (PREPLATE) (FINISH IS BRIGHT IN APPEARANCE,
THICKNESS AS APPLIED PRIOR TO REFLOW)

BRASS

(0.9) .035	(4.5) .177	(3.6) .142	(0.6) .024	(2.7) .106	(2.3) .091	∅ (3.1) .122 MAX.	# 16
(0.6) .024	(2.3) .091	(2.3) .091	(0.4) .016	(1.65) .065	(1.8) .071	∅ (0.9-1.8) .035-.071	#22-28
(0.9) .035	(4.5) .177	(3.6) .142	(0.5) .020	(2.3) .091	(1.9) .075	∅ (1.3-3.1) .051-.122	#18-24

↑ -0082	T3L	LOOSE
-0081	T3	CHAIN
-0049	T2L	LOOSE
-0048	T2	CHAIN
↓ -0041	↓ TL	LOOSE
39-00-0040	5558 T	CHAIN

PLATING

MATERIAL

F	E	D	C	B	A	INS. RANGE	WIRE RANGE	EDP NO.	ENG. NO.	FORM
---	---	---	---	---	---	------------	------------	---------	----------	------

SEE SHEET 1
EC NO: UCP2017-1893
DRAWN: GSLAFTER 2017/02/28
CHKD: JBELL 2017/03/14
APPR: FSMITH 2017/07/31

QUALITY SYMBOLS
▽=0
▽=0
▽=0

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± ---	± ---
3 PLACES	± ---	± .010
2 PLACES	± .25	± .010
1 PLACE	± .25	± ---
ANGULAR ± 3 °		

DRAFT WHERE APPLICABLE
MUST REMAIN
WITHIN DIMENSIONS

DIMENSION STYLE
MM/IN

DRAWN BY	DATE
H.HIRAMOTO	1991/03/12
CHECKED BY	DATE
S.KUNISHI	1998/07/07
APPROVED BY	DATE
FSMITH	2010/04/09

SCALE

DESIGN UNITS
METRIC

THIRD ANGLE PROJECTION

MINI-FIT JR
OVERALL TIN
MALE CRIMP TERMINAL

molex MOLEX INCORPORATED

MATERIAL NO. SEE CHART

DOCUMENT NO. SD-5558****

SHEET NO. 2 OF 2

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

9 8 7 6 5 4 3 2 1