

ITEM	PART#	DESCRIPTION	QTY	UOM
A,B	436400200	MicroFit 3.0 Plug SR Pnl Mnt 2Ckt	2	PC
C	430310021	MICROFIT 3.0 M CRP TERM CHN TIN 18AWG	4	PC
D	--	PAPER PRINTED PAPER WHITE	1	PC

FROM	TO	DESCRIPTION	COLOR
A1	B2	1X18AWG DISC SR-PVC BK UL10002	BLACK
A2	B1	1X18AWG DISC SR-PVC BK UL10002	BLACK

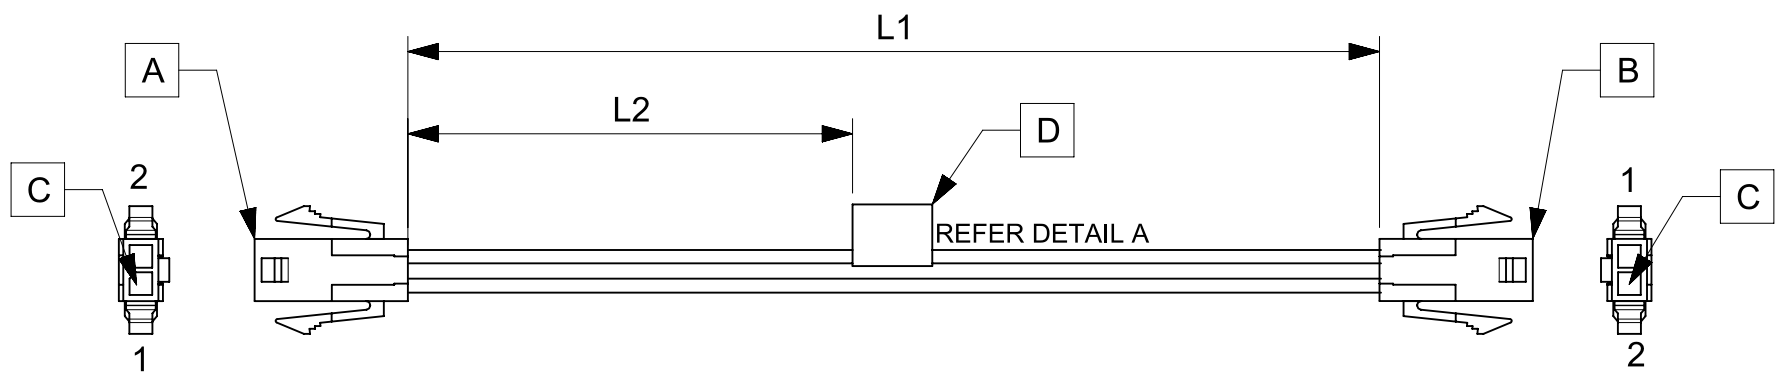


TABLE			
PART NUMBER	L1	L2	TITLE
2147521021	150±8	63 REF	MICROFIT 3.0 SR P-P 2CKT 150 MM Sn
2147521022	300±10	138 REF	MICROFIT 3.0 SR P-P 2CKT 300 MM Sn
2147521023	600±10	288 REF	MICROFIT 3.0 SR P-P 2CKT 600 MM Sn

NOTES

1. Cable assembly must pass 100% continuity and polarity test.
2. Connector view shown is from mating side.
3. Label text must be 2mm max. in height with Arial font.
4. Label must be wrapped in Flag type on a single cable.

PRE-RELEASE
 REFERENCE
 USE ONLY

MOLEX P/N
 MOLEX
 BATCH WK/YR
 DETAIL A

REVISION			
DATE	REV	DESCRIPTION	CHANGER
2020/02/29	A	INITIAL RELEASE	ARAJU

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION									
SYMBOLS ∇ = 0 ∇ = 0 ∇ = 0 ∇ = 0 ∇ = 0 ∇ = 0 ∇ = 0 ∇ = 0 ∇ = 0 ∇ = 0 ∇ = 0	DIMENSION UNITS mm	SCALE NTS	CURRENT REV DESC:						
	GENERAL TOLERANCES (UNLESS SPECIFIED)		EC NO: 637489 DRWN: ARAJU 2020/02/29 CHK'D: RDESAI01 2020/05/14 APPR: RDESAI01 2020/05/14						
ANGULAR TOL ± °		PRODUCT CUSTOMER DRAWING							
4 PLACES ±		INITIAL REVISION:							
3 PLACES ±		DRWN: ARAJU 2020/02/29							
2 PLACES ±		APPR: RDESAI01 2020/05/14							
1 PLACE ±		DOCUMENT NUMBER		DOC TYPE		DOC PART		REVISION	
0 PLACES ±		2147521021		PSD		000		A	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION	DRAWING	SERIES	MATERIAL NUMBER	CUSTOMER		SHEET NUMBER	
			A4-SIZE	214752	SEE TABLE	GENERAL MARKET		1 OF 1	

RELEASE STATUS	P1	RELEASE DATE	2020/05/14	03:37:07
----------------	----	--------------	------------	----------