



ISSUE NUMBER
ORIGINAL

(1)

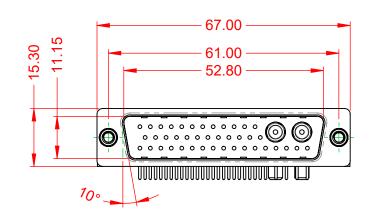




.XX ±0.13 .XXX ±0.05

## NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:


THERMOPLASTIC POLYESTER, UL94V-0 STEEL, TIN PLATED COPPER ALLOY, GOLD FLASH PLATED



OPERATING TEMPERATURE:	-55°C ~ 125°C	
POWER/CO-AX CONTACT RATING: (IF PRESENT)	75Ω (IMPEDANCE)	_
SIGNAL CONTACT CURRENT RATING: SIGNAL CONTACT RESISTANCE:	5A PER CONTACT 10mΩ MAX.	Ó
INSULATOR RESISTANCE: DIELECTRIC	5000MΩ min.	

WITHSTANDING VOLTAGE:

1000V AC rms



ſ		SW REFERENCE NO.: 629 COMBO ASSEMBLY			
ļ			DRAWN: C.B	DATE: JAN. 01/201	19
ļ			CHECKED:	DATE:	
ŗ	EDAC INC TORONTO, ONTARIO CANADA	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INCAND	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	2
ļ		MANUFACTURE OR SALE OF APPARATUS	DRAWING NUMBER: 629-43W2	2240-7T6	ISSUE
ļ			PART NUMBER: 629-43W2	2240-7T6	1



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

