
ב ב ב ב ב ב ב ב ב ב ב ב ב ב ב ב ב ב ב	т (Г		0	Ξ		
Z S C C C C C C C C C C C C C C C C C C				WN AS EXAMPLE		
	Keying Shown as example					
CHARACTERISTICS -Standard : Based on MIL-DTL-38999 Series III	Connector dimension Dim Nominal					
-Shell Material: Composite-Shell Plating: Without Plating-Insulator: Thermoplastic-Contacts: Copper Alloy-Seals & Grommet: Silicon Elastomer	ØS35.7 MaxZ31 MaxVV THREADM25x1-6g		SOURIAU shall not be liable for any non-conformity or damage due to a use of the Products which does not comply with the Specifications issued by either of the Parties or by a third party (professional recommendation, technical notice.)			
-Contact Plating : Gold over copper Alloy 0.8µm minimum		[			Listed	
-Durability       : 500 Mating cycles         -Delivered with Souriau contacts and Accessories			PN: 8D517X08PE			
-Temperature Range : -65°C to +175°C		A 18-10-201	16 First Release			
-Salt Spray : 2000 hours -Mass : 24.9 g ± 10%		ISS DATE	Latest modification - by		MOD	N°
		Designed By:	Date:	CU	STOMER DRAWING	
		TITLE	LE Composite Plug 8D series			
BASIC SERIES: 8D 5 - 17 X 08 SHELL TYPE : Plug with RFI Shielding	P E	SCALE NA	Genera Tolera ±	inces:	NPRDS / PROJECT <b>859</b>	
CONTACT TYPE : Standard Crimp Contact	ORIENTATIO	— SOURIAL	U WWW.SOUR		This document is the property of SOURIAU it must not be reproduced or	
SHELL SIZE : 17	CONTACT TYPE : PIN(500 Mati				communicated without permission	
PLATING : X = Without Plating	CONTACT LAYOUT : 1	7-08 FORMAT A3		RIAU DRG N° 517X08PE-C	SHE	
					1/2	

_	т	۵	п	m		0	
		Contact Layout					
4	-х (	$ \begin{array}{c} & & & & \\ & & & \\ & & & \\ & & & \\ & & & \\ & & & \\ & $					
	Conta position A B C C D E F	Contacts           Contacts           Location           Y-axis           x-axis         Y-axis           (mm)         (mm)           +.000 (0.00)         +.236 (5.99)           +.128 (3.25)         +.086 (2.18)           +.230 (5.84)        078 (1.98)           +.094 (2.39)        216 (5.49)					
ω	G H Shell Arrangement Nun size no. cor	128 (3.25) +.086 (2.18)					
						SOURIAU shall not be liable due to a use of the Produ the Specifications issued by e (professional recomr	ucts w either c
N						PN: 8D!	Count FR 517
_					A 18-10-20 ISS DATE Designed By:	116 First Release	
					TITLE		ompo
<u> </u>					SCALE NA	General I Toleran ±	nces:
					SOURIA	U WWW.SOURI	4U.(
				_	FORMAT A3	SOUR 8D5	
L	Н	G	F	E	D	C	

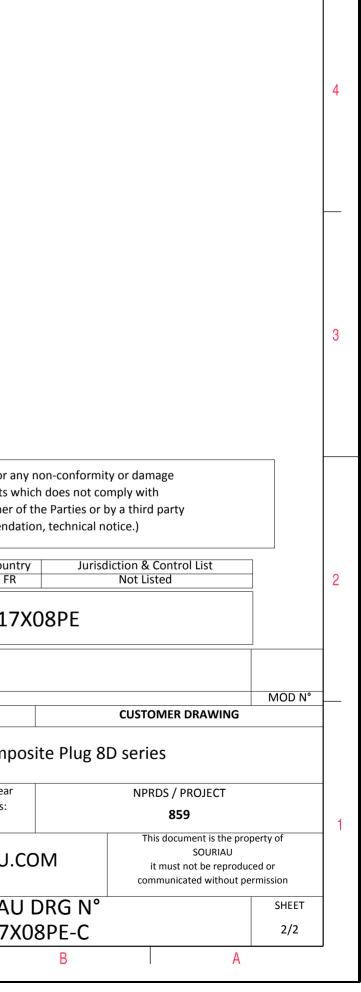

 $\triangleright$ 

σ