







ISSUE NUMBER (1)

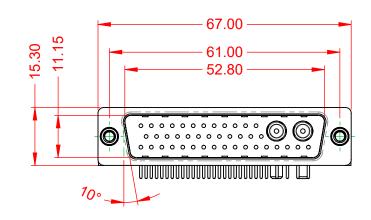




NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:

THERMOPLASTIC POLYESTER, UL94V-0 STEEL, NICKEL PLATED COPPER ALLOY, 30µ" GOLD PLATED




OPERATING TEMPERATURE: -55°C ~ 125°C 30A (CURRENT) POWER/CO-AX CONTACT RATING: (IF PRESENT) SIGNAL CONTACT CURRENT RATING: 5A PER CONTACT SIGNAL CONTACT RESISTANCE: $10m\Omega$ MAX. **INSULATOR RESISTANCE:** 5000MΩ min. DIELECTRIC

WITHSTANDING VOLTAGE:

.X ±0.25 .XX ±0.13 .XXX ±0.05

1000V AC rms



| | COMBINATION D-SUB | | SW REFERENCE NO.: 629 COMBO ASSEMBLY | | |
|-----------|--------------------------------------|---|--------------------------------------|-------------------|-------|
| | | | DRAWN: C.B | DATE: JAN. 01/201 | 19 |
| | | | CHECKED: | DATE: | |
| Ö | EDAC INC | THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND | SCALE: (IN C.A.D. 1:1) | SHEET 1 OF | 2 |
| ES CY. | YOUR CONNECTION TO QUALITY & SERVICE | SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION. | DRAWING NUMBER: 629-43W2650-3N6 | | ISSUE |
| | | | PART NUMBER: 629-43W | 2650-3N6 | 1 |



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY

