

Material and Finish

Insulator: PBT Thermoplastic with Glass-fiber Reinforcement, UL 94V-0 Rated, Color: Black

Shell: Steel, Nickel Plated

Contact Material: Plug - Brass

Contact Plating Options:

Standard: Gold Flash on Mating End, Tin on Termination End, Nickel Underplate on Entire Contact

15 Option: 15u" Gold on Mating End, Tin on Termination End, Nickel Underplate on Entire Contact



30 Option: 30u" Gold on Mating End, Tin on Termination End, Nickel Underplate on Entire Contact

Electrical Specifications

- Rated Current: 2A
- Rated Voltage: 30V RMS
- Insulation Resistance: 1000 Megohms Min. at 500V DC
- Contact Resistance: 13 milliohms Max.
- Dielectric Withstanding Voltage: 1000V for 1 Minute

Mechanical Specifications

Operating Temperature: -55°C to +105°C

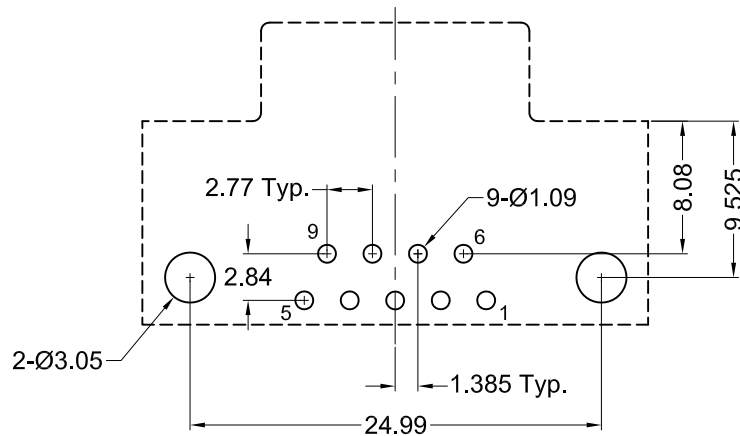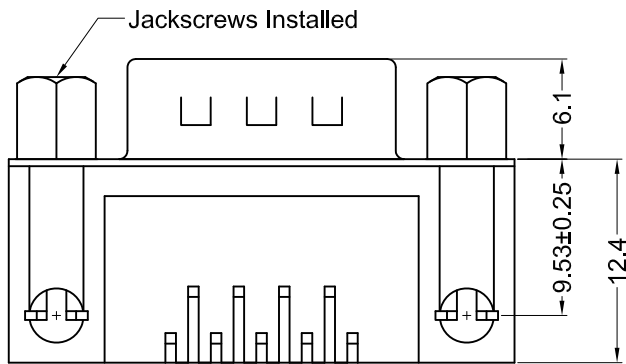

Recommended PCB Layout (Top View)

Part Number	Contact Area Plating Finish
K22X-E9P-NJ	Gold Flash (Standard)
K22X-E9P-NJ15	15u" Gold (15 Option)
K22X-E9P-NJ30	30u" Gold (30 Option)




Tolerances
X.X ± 0.25
X.XX ± 0.15
Unless Stated Otherwise

REV.	DATE	DESCRIPTION	REV. BY	CHK. BY	DRAWN BY	DATE
A1	11/04/05	New Drawing	R. Aguirre	H. MA	R. Aguirre	11/03/05
A2	02/21/08	ECO #07-049	S. Vien	H. MA		
A3	07/26/13	ECO #12-018	S. Vien	P. DalCanto		
A4	12/31/17	ECO #17-027	G. Serrato	C. Furumasu		

K22X-E9P-NJ

Right Angle D-Sub, RoHS Compliant

9 Position, Male, 0.318" Footprint, Jackscrews Installed



UNITS
mm