

# PCR Series

Pulse Withstanding Chip Resistor



- Resistances from 1 Ohm to 20MOhms
- Power Rating 0.125 to 1.5 Watt
- Resistance Tolerances to  $\pm 5\%$
- Excellent pulse withstanding performance
- TCR's to  $\pm 100$  ppm/ $^{\circ}\text{C}$
- Sizes: 0603 / 0805 / 1206 / 1210 / 2010 / 2512


## SPECIFICATIONS

Type	PCR0603	PCR0805	PCR1206	PCR1210	PCR2010	PCR2512
Power Rating (W) at 70°C	0.125	0.25	0.33	0.50	0.75	1.5
Resistance Range ( $\Omega$ ) (E24)	10 to 1M	1 to 20M				
MAX Operating Voltage <sup>1</sup>	50V	150V	200V	200V	400V	500V
Tolerances	5% / 10% / 20%					
TCR	10 $\Omega$ - 270 $\Omega$ : 200ppm 300 $\Omega$ - 1M: 100ppm	1 $\Omega$ - 270 $\Omega$ : 200ppm 300 $\Omega$ - 20M: 100ppm	1 $\Omega$ - 20 $\Omega$ :200ppm 22 $\Omega$ - 20M:100ppm			

<sup>1</sup> Operating Voltage =  $\sqrt{P \cdot R}$  or MAX Listed, whichever is lower.

	Type	Quantity / Tape Diameter
PCR0603	Paper	5K / 7" 10K / 10" 20K / 13"
PCR0805		
PCR1206		
PCR1210		
PCR2010	Embossed	4K / 7" 8K / 10"
PCR2512		

Power Derating Curve

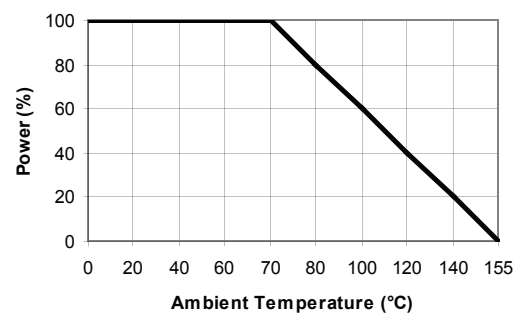

## Ordering Information

Part Description: Part Type - Resistance - Tolerance - TCR - Packaging

Example: PCR0603 10 Ohm 5% 200ppm

(Note: if no TCR is specified: The highest value will be supplied)


# PCR Series

Pulse Withstanding Chip Resistor



## Specifications

Test	Specification	Test Method
TCR	see above	-55°C~+125°C, 25°C is the reference temperature
Short Time Overload	$\pm(1.0\%+0.05\Omega)$	RCWV*2.5 or Max. overload voltage for 5 seconds
Insulation Resistance	$\geq 10G$	Max. overload voltage for 1 minute
Load Life	$\pm(3.0\%+0.05\Omega)$	70 $\pm$ 2°C, Max. working voltage for 1000 hrs with 1.5 hrs "ON" and 0.5 hrs "OFF"
Damp Heat with Load	$\pm(3.0\%+0.05\Omega)$	40 $\pm$ 2°C, 90~95% R.H. Max. working voltage for 1000 hrs with 1.5 hrs "ON" and 0.5 hrs "OFF"
Dry Heat	$\pm(3.0\%+0.05\Omega)$	at +155°C for 1000 hrs
Bending Strength	$\pm(1.0\%+0.05\Omega)$	Bending once for 5 seconds 2010, 2512 sizes: 2mm Other sizes: 3mm
Solderability	95% min. coverage	245 $\pm$ 5°C for 3 seconds
Resistance to Soldering Heat	$\pm(1.0\%+0.05\Omega)$	260 $\pm$ 5°C for 10 seconds
Voltage Proof	No breakdown or flashover	1.42 times RCWV (RMS) for 1 minute
Leaching	Individual leaching area $\leq 5\%$ Total leaching area $\leq 10\%$	260 $\pm$ 5°C for 30 seconds
Rapid Change of Temperature	$\pm(1.0\%+0.05\Omega)$	-55°C to +155°C, 5 cycles
RoHS Compliant Exemption	This part is RoHS compliant <u>with exemption 7(c)-I</u> , as authorized by 2011/b5/EU.	

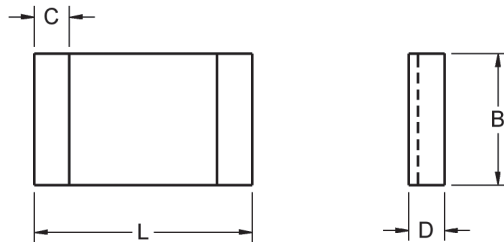

Type	Dimensions			
	L	B	D	C
PCR 0603	0.060 $\pm$ 0.004 [ 1.6 $\pm$ 0.1 ]	0.030 $\pm$ 0.004 [ 0.8 $\pm$ 0.1 ]	0.018 $\pm$ 0.004 [ 0.45 $\pm$ 0.1 ]	0.012 $\pm$ 0.008 [ 0.3 $\pm$ 0.2 ]
PCR 0805	0.080 $\pm$ 0.004 [ 2.0 $\pm$ 0.1 ]	0.050 $\pm$ 0.004 [ 1.25 $\pm$ 0.1 ]	0.020 $\pm$ 0.004 [ 0.50 $\pm$ 0.1 ]	0.016 $\pm$ 0.008 [ 0.4 $\pm$ 0.2 ]
PCR 1206	0.120 $\pm$ 0.004 [ 3.1 $\pm$ 0.1 ]	0.060 $\pm$ 0.006 [ 1.55 $\pm$ 0.15 ]	0.022 $\pm$ 0.004 [ 0.55 $\pm$ 0.1 ]	0.020 $\pm$ 0.008 [ 0.5 $\pm$ 0.2 ]
PCR 1210	0.120 $\pm$ 0.004 [ 3.1 $\pm$ 0.1 ]	0.100 $\pm$ 0.006 [ 2.6 $\pm$ 0.15 ]	0.022 $\pm$ 0.004 [ 0.55 $\pm$ 0.1 ]	0.020 $\pm$ 0.008 [ 0.5 $\pm$ 0.2 ]
PCR 2010	0.200 $\pm$ 0.004 [ 5.0 $\pm$ 0.1 ]	0.100 $\pm$ 0.006 [ 2.5 $\pm$ 0.15 ]	0.022 $\pm$ 0.004 [ 0.55 $\pm$ 0.1 ]	0.020 $\pm$ 0.008 [ 0.5 $\pm$ 0.2 ]
PCR 2512	0.250 $\pm$ 0.004 [ 6.35 $\pm$ 0.1 ]	0.120 $\pm$ 0.006 [ 3.1 $\pm$ 0.15 ]	0.022 $\pm$ 0.004 [ 0.55 $\pm$ 0.1 ]	0.020 $\pm$ 0.008 [ 0.5 $\pm$ 0.2 ]


# PCR Series

Pulse Withstanding Chip Resistor




## Pulse Graphs

### Single Pulse

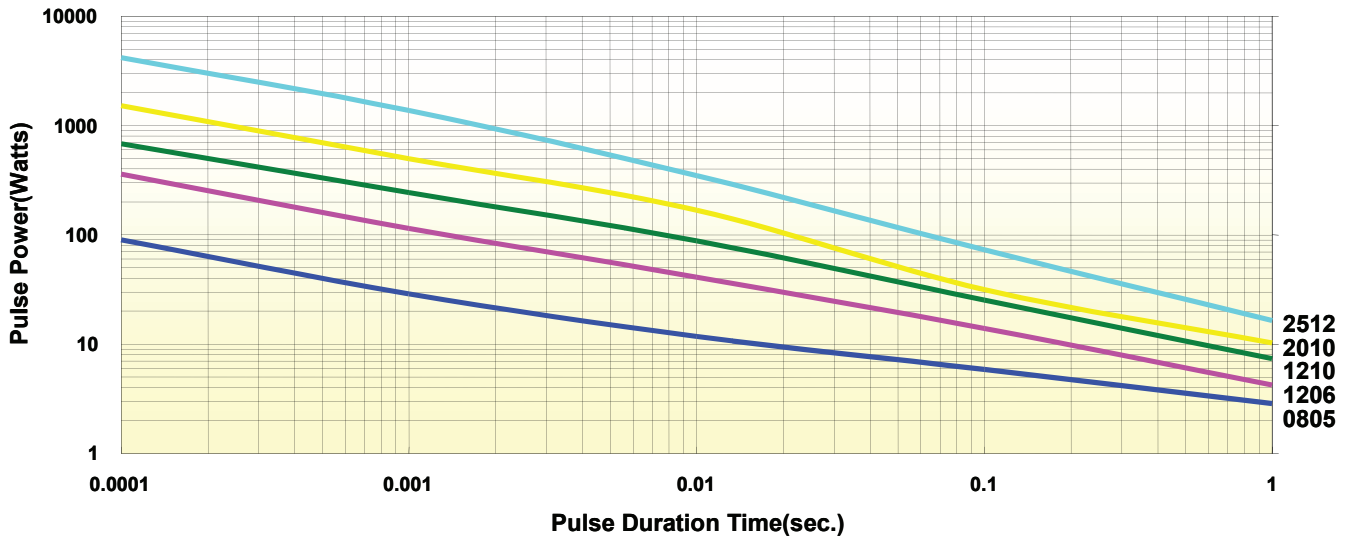

<sup>1</sup>Result of 50 rectangular pulses at 1 min intervals  
<sup>2</sup><1% deviation from initial value

### Continuous Pulse

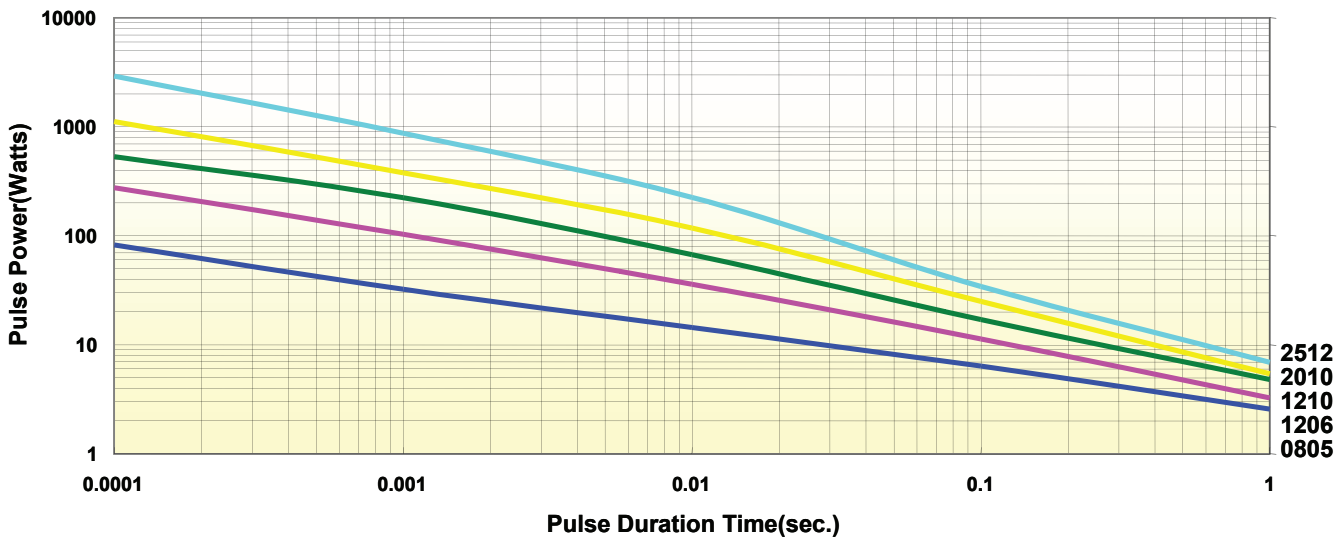

<sup>1</sup>Result of rectangular pulses at intervals causing max power rating at 70C  
<sup>2</sup><1% deviation from initial value