




Data sheet | Item number: 756-5101/030-015

Sensor/Actuator cable; M8 socket; straight; 3-pole; Length: 1.5 m

www.wago.com/756-5101/030-015



 Picture differs from the item.

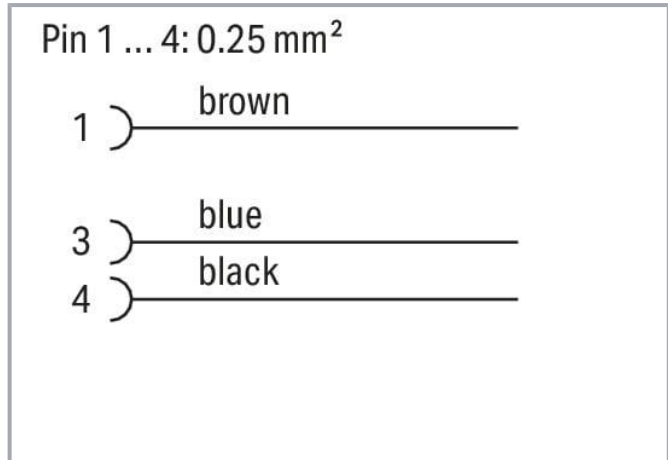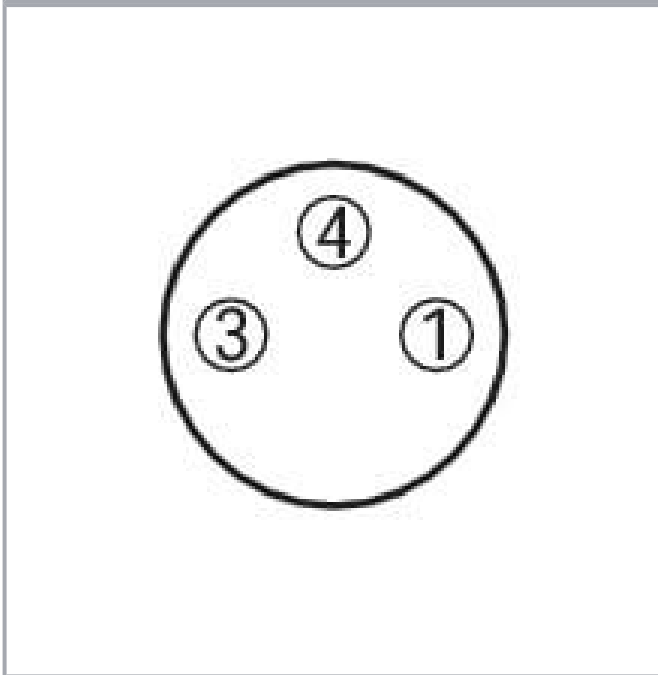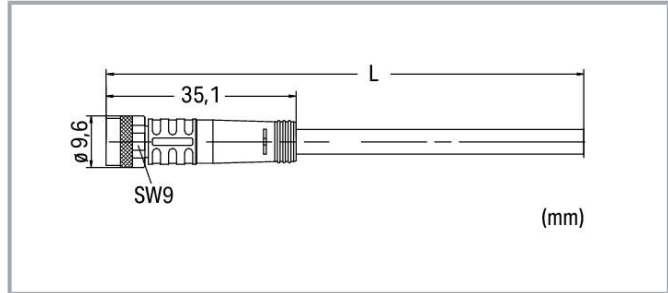

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



Item description

Short description:

- PUR, halogen-free
- Suitable for drag chains
- High resistance to microbes, hydrolysis, oil, chemicals and UV radiation
- High chemical resistance
- Cable used: UL listed

Data

Technical data

General

Operating voltage	60 VAC/DC
Operating current	4 A
Rated surge voltage	1.5 kV
Contact resistance	10 mΩ
Conductor resistance	≤ 60 Ω/km
Pollution degree	3 per VDE 0110
Protection type	IP67
Ambient (operating) temperature (static)	-50 ... +90 °C
Ambient (operating) temperature (dynamic)	-25 ... +90 °C

Suitable for drag chains

Bending radius	10 x cable diameter (min.)
Bending cycles	2 Mio.
Acceleration (min.)	5
Travel speed (max.)	3.33
Travel path (horizontal) max.	5
Travel path (vertical) max.	2
Torsional capacity	180

Other properties

Note	Silicone-free, CFC-free, microbe and hydrolysis resistant, oil resistant
------	--

Subject to changes. Please also observe the further product documentation!



Cable

Cable length	1.5 m
Type code	LiF9YH-11YH or LiF9YC11YFHF
Note	Aufbau gemäß UL + CSA, UL AWM Style 21198, Ader-Style 10493
Conductor configuration	Bare copper wire, fine-stranded (42 x 0.1 mm)
Conductor insulation	PP9Y (halogen-free)
Sheath material	Polyurethane (PUR), halogen-free per DIN VDE 0472 Part 815, flame resistant per IEC 332-2, self-extinguishing
Sheathed cable color	black
Sheathed cable diameter	3.9 ... 4.3 mm

Connector

Connection type	M8 socket - free end
Cable connection direction to mating direction	0°
Housing material	Polyurethane (PUR)
Contact material	CuSn
Tightening torque	0.6 Nm

Commercial data

eCl@ss 10.0	27-06-03-11
eCl@ss 9.0	27-06-03-11
ETIM 8.0	EC001855
ETIM 7.0	EC001855
PU (SPU)	10 (1) pcs
Packaging type	Box
Country of origin	CZ
GTIN	4044918973298
Customs tariff number	85444290900

Environmental Product Compliance

CAS-No.	7439-92-1
REACH Candidate List Substance	Lead
RoHS Compliance Status	Compliant,With Exemption
RoHS Exemption	6(c)
SCIP notification number (Austria)	df30bff7-b6c1-4f84-9e4d-1c8b2ace79d9
SCIP notification number (Belgium)	caba0e1c-1aad-490c-8dc5-5932ed219ff2

Subject to changes. Please also observe the further product documentation!


WAGO GmbH & Co. KG
 Hansastr. 27
 32423 Minden
 Phone: +49571 887-0 | Fax: +49571 887-169
 Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
 We are always happy to take your call at +49 (571) 887-44222.

SCIP notification number (Bulgaria)	34a9b86f-53f8-4f1f-be53-028e01e67cf6
SCIP notification number (Czech Republic)	0a827dd2-2071-4d13-a925-0b1ae1bfe2fd
SCIP notification number (Denmark)	51adde74-e33d-4799-9c4b-925d0d27d26c
SCIP notification number (Finland)	47a18044-cf86-4d6f-90f0-94e6ebd1052f
SCIP notification number (France)	6b7391be-7c17-4cc6-981c-8fa2b50170d1
SCIP notification number (Germany)	fd6d4e23-a201-4373-9979-1f5cea6a85bc
SCIP notification number (Hungary)	81a18c93-8f6b-4e87-b163-c85019648cd9
SCIP notification number (Italy)	f1c197c8-3b40-46ff-833e-feb2578081a9
SCIP notification number (Netherlands)	4410a73b-dbf2-4a3d-a758-b43b7628f692
SCIP notification number (Poland)	45dd56c9-08f5-4deb-8815-052fb4816a6d
SCIP notification number (Romania)	95e41247-7e8f-45da-b9e6-70fa6fdfac29
SCIP notification number (Sweden)	7005666c-d7c0-4932-8825-6f299f833adb

Approvals / Certificates

General approvals

Logo	Approval	Additional Approval Text	Certificate name
	UL Underwriters Laboratories Inc.	UL 2238	E519602

Downloads

Documentation

Bid Text

756-5101/030-015 X81 - Datei	2019 Feb 19	xml 3.3 kB	Download
756-5101/030-015 doc - Datei	2017 Sep 20	doc 25.6 kB	Download

System Description

IP67 Cables and Pluggable Connectors	pdf 161.6 kB	Download
--------------------------------------	-----------------	----------

Subject to changes. Please also observe the further product documentation!



CAD/CAE-Data

CAE data

WSCAD Universe 756-5101/030-015	URL	Download
WSCAD Universe 756-5101/030-015	URL	Download

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 756-5101/030-015	URL	Download
Sensor/Actuator cable; M8 socket; straight; 3-pole; Length: 1.5 m		

Installation Notes

Subject to changes. Please also observe the further product documentation!