


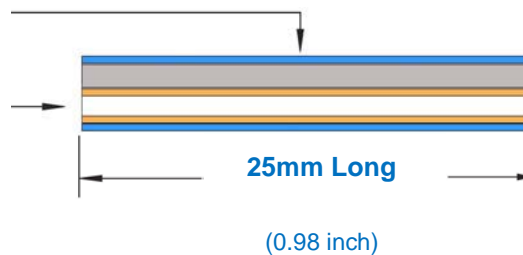


## PS-6A-X25M

Fiber optic fusion splice protector sleeve

### Product Dimensions

|                                 |  |
|---------------------------------|--|
| Sleeve Diameter After Shrinkage | <b>1.9 mm</b><br>(0.075 inch)                    |
| Supplied Internal Diameter      | <b>1.2 mm</b><br>(0.047 inch)                    |
| Single fiber size               | <b>250 to 900 µm</b>                             |
| Reinforcing Member              | <b>Stainless Steel Rod 0.5mm</b><br>(0.197 inch) |
| Color                           | <b>Clear</b>                                     |
| Package Quantity                | <b>Bag 50</b>                                    |



-  Heat Shrink Outer Polyolefin Tube
-  Hot-Melt Adhesive Inner Tube
-  Stainless Steel Reinforcing Rod

### Product Features

- Provides mechanical and environmental protection to fiber splices after fusion splicing
- Bellcore (Telcordia) GR-1380-CORE Certification
- UL 224 approved YDPU2.E467437 high quality materials
- Pre-shrunk heat bonded design for faster installation
- Single fibre aperture for easier fiber insertion
- Stainless steel reinforcing pin
- 25+ years of specialist manufacturing experience with proven long-term reliability
- Compatible with most optic fibers, splice trays and splice ovens
- RoHS & REACH Compliant and Conflict Free



Member #0240

