

Ŧ	<u>م</u>	П	m	0



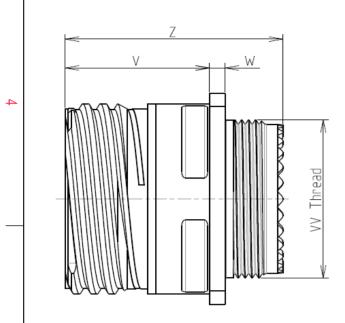

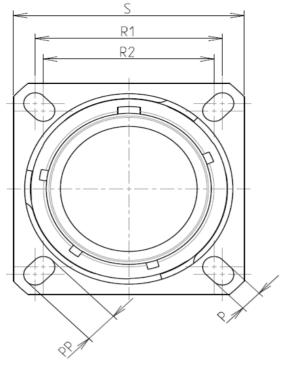

Keying Shown as example

CHARACTERISTICS

ω

 \sim

-Mass

BASIC SERIES:

SHELL SIZE: 17

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

PLATING : W = Olive drab Cadmium

-Standard : Based on MIL-DTL-38999 Series III

-9	Shell Material	: Aluminium					
-9	Shell Plating	: Olive drab Cadmium					
-1	Insulator	: Thermoplastic					
-(Contacts	: Copper Alloy					
-9	Seals & Grommet	: Silicon Elastomer					
-(Contact Plating	: Gold over copper Alloy $0.8 \mu m$ minimum					
- [Durability	: 500 Mating cycles					
- [-Delivered with Souriau contacts and Accessories						
-1	Temperature Range	: -65°C to +175°C					
-9	Salt Spray	: 500 hours					

: 35.93 g ± 10%

8D 0

G

17

-

W

08

F

S B

Connector dimension				
Dim	Nominal			
Р	3.25±0.2			
РР	4.93±0.2			
R1	26.97			
R2	24.61			
S	33.3±0.3			
V	20.83+0/-1.25			
W	2.1/2.5			
Z	31.5 Max			
VV THREAD	M25x1-6g			

т	1		D		0		σ			
										4
					LA	YOUT SHOWN AS EX	AMPLE			3
Connector di Dim P PP R1 R2	Nominal 3.25±0.2 4.93±0.2 26.97				due to a use	not be liable for any of the Products wh	ich does not comply	/ with		
S	24.61 33.3±0.3	-	the Specifications issued by either of the Parties or by a third party (professional recommendation, technical notice.)							
V W Z	20.83+0/-1.25 2.1/2.5 31.5 Max	-	Country Jurisdiction & Control List FR Not Listed						2	
HREAD	M25x1-6g			PN: 8D017W08SB						
				7-04-17	Drawing Update					
			ISS Designed B	DATE /:	Latest modification	on - by	CL	JSTOMER DRAWING	MOD N°	
_			тп	TITLE Aluminium Receptacle 8D series						
		SCALE NA	-	General line Tolerance: ±		NPRDS / PROJECT 859			1	
ORIENTATION : B CONTACT TYPE : SOCKET(500 Matings)		SOU	SOURIAU WWW.SOURIAU.COM it must not be rep			This document is the pro SOURIAU it must not be reprodu communicated without pe	ced or			
CONTACT LAYOUT : 17-08		FORMAT A3		SOURIAU DRG N° 8D017W08SB-C				SHEET 1/2		
E		1	D		С		B	A	1	

		۵	гт –	m		0	
		Contact Layout					Panel Cutor
4	-x ($ \begin{array}{c} $			π	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING	
_	Conta position A B C C D	Contacts (insert arrangement 17-8) ct 1DD Location X-axis (mm) Y-axis (mm) +.000 (0.00) +.236 (5.99) +.128 (3.25) +.086 (2.18) +.230 (5.84) 078 (1.98) +.094 (2.39) 216 (5.49)			<u> </u>	Max. thickness panel for receptacle: Typ	Ø⊺ rpe 0: front mod
ω	size no. cor	094 (2.39) 216 (5.49) 230 (5.84) 078 (1.96) 128 (3.25) +.006 (2.18) +.000 (0.00) 052 (1.32) nber of tacts contacts rating location 8 16 II All MS20053-8				Dim ØA ØAA R1 ØT	
						SOURIAU shall not be lia due to a use of the Pi the Specifications issued b (professional reco	Products wh by either o
N						PN: 81	Countr FR D017
					B 17-04-1 ISS DATE Designed By:	7 Drawing Update Latest modification - by Date:	
-					TITLE SCALE NA		eral linear lerances: ±
					SOURIA		riau.c Uriau
					A3	8D	081A0
	Н	G	F	E	D	C	

