
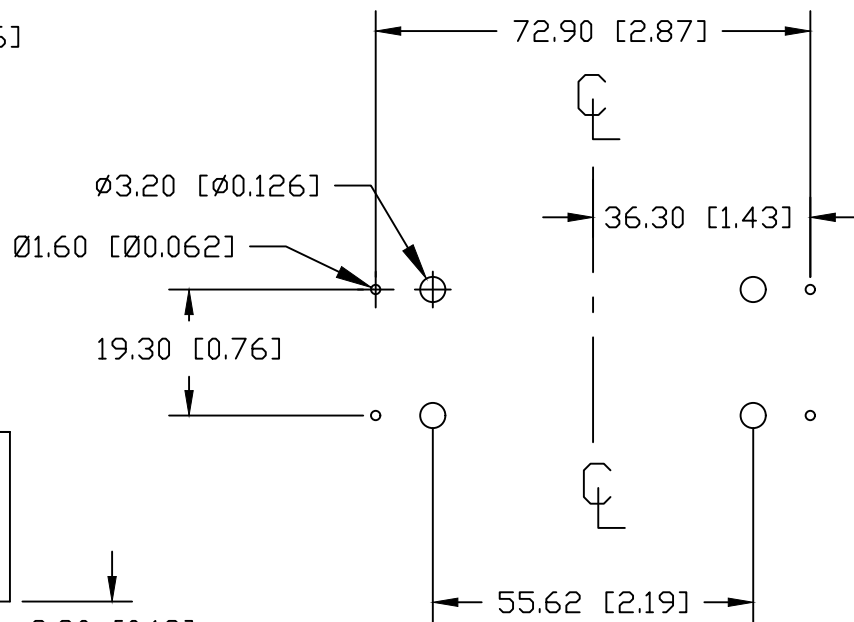
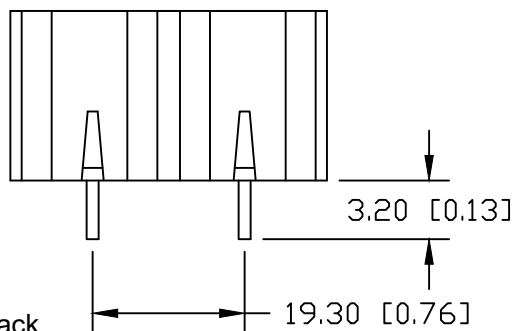
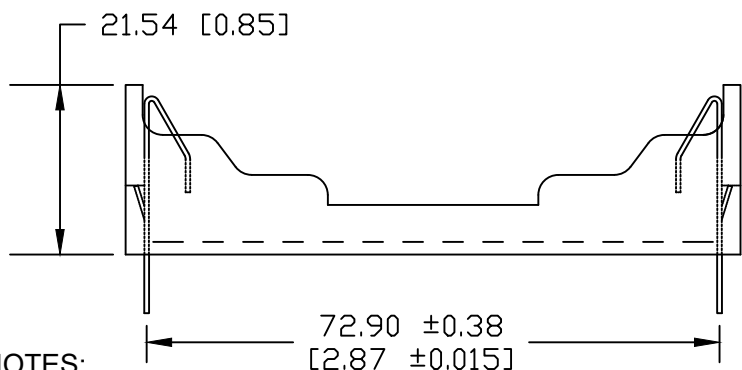


This battery holder is designed for use with protected 18650 batteries (PCB)

Date	SYM	REVISION RECORD	AUTH	DR.	CK.
06/30/17	G	DIM. 72.90 WAS 72.50	T.B.	B.S.	
07/22/17	H	ADDED MOUNTING INSTRUCTION	T.B.	B.S.	
04/05/19	J	DIM. 72.90 WAS 72.50	T.B.	B.S.	
05/17/19	K	UPDATED NOTES	T.B.	B.S.	

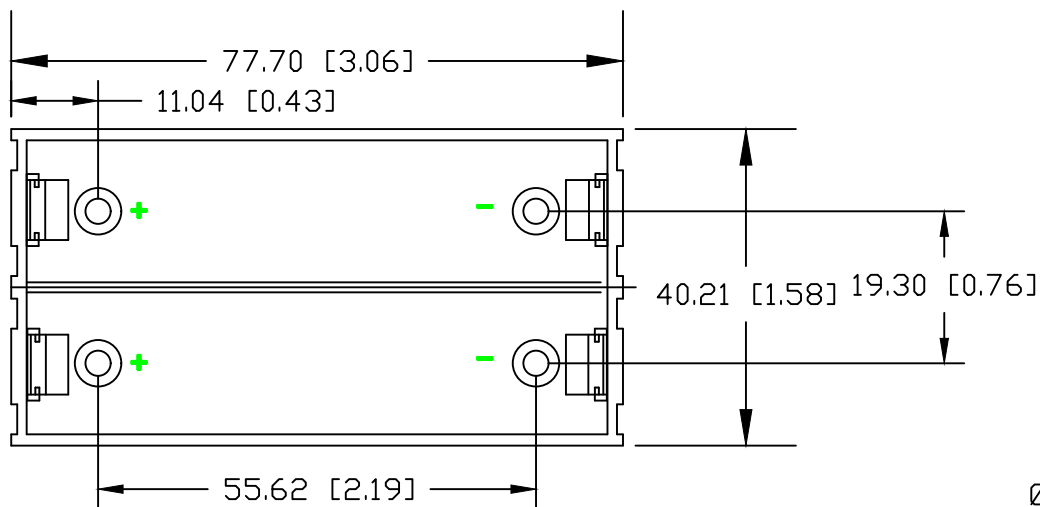


**PCB LAYOUT**

**NOTES:**

Material: Self-extinguishing Thermoplastic Polyester, color black  
 Temperature Range: -40°C to +180°C  
 Contacts: 302 Stainless Steel Spring Temper, Nickel Plated  
 Flammability Rating: UL 94V-0  
 Dielectric Strength: 560 Volts/Mil. at 25°C for 5 Sec.  
 Resistance to Solvents: Xylene, ethyl, butyl, methyl & toluene  
 Weight: 19.55g.  
 ROHS COMPLIANT

**Mounting Instruction:**

Use 2-56 machine screws or eyelets 0.089" OD by 0.15" flange stimpson GS-3 series or equivalent. also adhesives and double sided tapes work well.

Tolerance (Inches)	 <b>Memory Protection Devices, Inc</b> 200 Broad Hollow Road, Farmingdale, New York 11735		
Decimal ±.5 (.020)	Scale	Drawn By B.S.	
Fractional ±.8 (.030)	Title TWO 18650 LI-ION CELL HOLDER		
Angular ± 3°	Date 05/17/19	Drawing Number BK-18650-PC4	
		Approved By T.B.	