


TABLE 1

MODEL NUMBER	LENGTH
415-0201-MM75	75mm +25/-6
415-0201-MM100	100mm +25/-6
415-0201-MM200	200mm +25/-6
415-0201-MM500	500mm +50/-25
415-0201-M1.0	1000mm +50/-25

REV	ECO	DATE
1	INITIAL RELEASE	7/12/2019

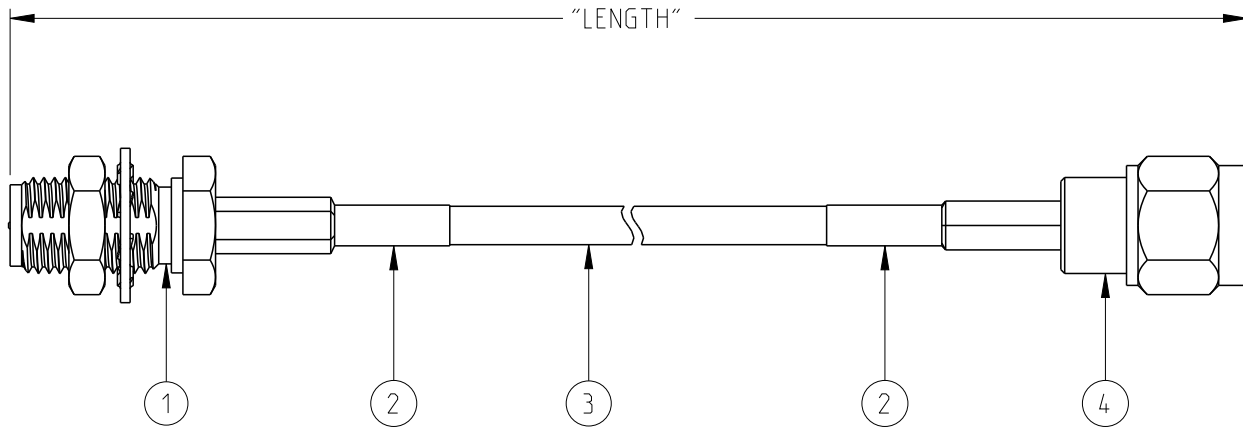

NOTES: UNLESS OTHERWISE SPECIFIED.

1. CABLE ASSEMBLY DIELECTRIC WITHSTANDING VOLTAGE: 750 VRMS FOR A PERIOD OF ONE MINUTE.
2. CABLE ASSEMBLIES TO BE 100% TESTED FOR VOLTAGE AND CONTINUITY.
3. ASSEMBLIES TO BE PACKAGED 1 PER BAG.

PART LIST		
ITEM	QTY	DESCRIPTION
1	1	REVERSE POLARITY SMA BLKHD JACK
2	2X 1.00±0.10	HEAT SHRINK TUBING
3	AR	CABLE
4	1	REVERSE POLARITY SMA PLUG

<p>This PROPRIETARY Document is property of Cinch Connectivity Solutions. It is confidential in nature, non-transferable, and issued with the clear understanding that it is not traced or copied without permission and is returnable upon demand.</p> <p>INTERPRET DRAWING IN ACCORDANCE WITH ASME Y14.5-2009.</p>	Model No: 415-0201-MXXXX	JOHNSON		
	RoHS2 <input checked="" type="checkbox"/> 2011/65/EU	Cage Code 34078	Title: CABLE ASSY, METRIC, STR REVERSE POLARITY SMA BULKHEAD JACK TO STR REVERSE POLARITY SMA PLUG, RG174	
	UNLESS OTHERWISE SPECIFIED UNITS: INCH .XX ±.02 .XXX ±.010 ANGLES ±2°	3RD ANGLE PROJECTION 	Drawing No. 415-0201-MXXXX	REV. 1
	Drawn by: ROMAN YAO	Date: 7/12/2019	Size A	DO NOT SCALE DRAWING Workmanship Std NONE
		Sheet 1 OF 1	Sheet 1 OF 1	