



Data

Technical data

Main product function

Operating tool

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.

Material Data

Color	orange
Insulation material	Polycarbonate (PC)
Flammability class per UL94	V2
Fire load	0.015 MJ
Weight	0.5 g

Commercial data


Product Group	26 (picoMAX Connectors)
eCl@ss 10.0	27-14-11-92
eCl@ss 9.0	27-14-11-92
ETIM 8.0	EC002848
ETIM 7.0	EC002848
PU (SPU)	100 (25) pcs
Packaging type	box
Country of origin	DE
GTIN	4050821479260
Customs tariff number	82055980000

Environmental Product Compliance

RoHS Compliance Status	Compliant, No Exemption
------------------------	-------------------------

Approvals / Certificates

General approvals

Logo	Approval	Additional Approval Text	Certificate name
	UL Underwriters Laboratories Inc.	UL 1977	E45171

Downloads

CAD/CAE-Data

CAD data

2D/3D Models 2092-1630	URL	Download

Subject to changes. Please also observe the further product documentation!

CAE data

ZUKEN Portal 2092-1630

[URL](#)

[Download](#)

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 2092-1630


[URL](#)

[Download](#)


Unlocking tool; orange

Installation Notes


Locking system

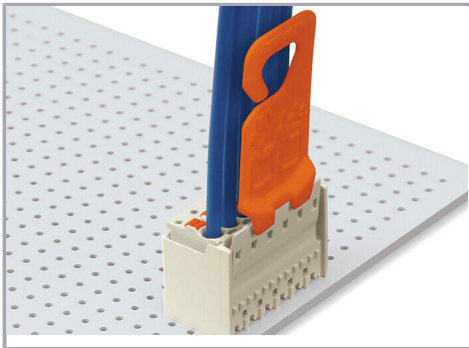

Disconnecting female connector via unlocking tool. Plug unlocking tool into the male header's locking latch.

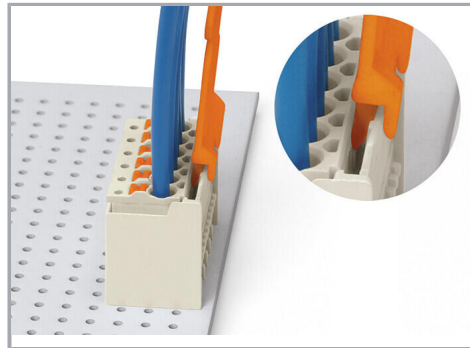

Disconnecting a female connector via unlocking tool. Plug unlocking tool into the male header's locking latch.

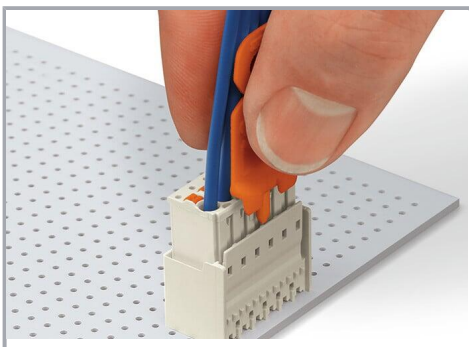

Pull on both unlocking tool and conductors to remove female connector from male header.

Subject to changes. Please also observe the further product documentation!