

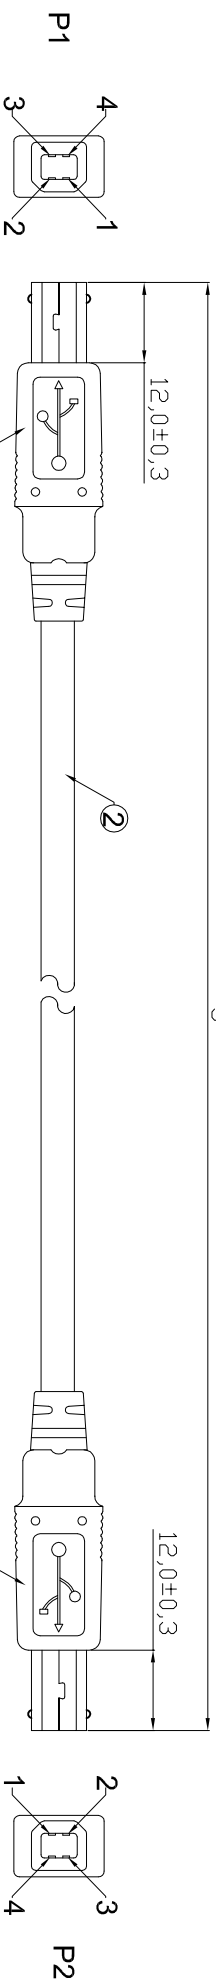


1 2 3 4 5 6 7

Length





Cable BLACK print  
**AWM STYLE 2725 80°C 30V VW-1 28AWG/1P 24AWG/2C**  
**---c AWM I/II A 80°C 30V FT1 USB CABLE**



**Electrical test:**

1. 100% short, open, miss wire test
2. Conduct resistance: 2 Ohm max.
3. Insulator resistance: 10Mohm min.
4. Dielectric test: DC 300V

WSW P/IN	Jacket color	Length(mm)
AK673/2-1	Beige	1000±30
AK673/2-2	Beige	2000±50
AK673/2-3	Beige	3000±50
AK673/2-5	Beige	5000±50

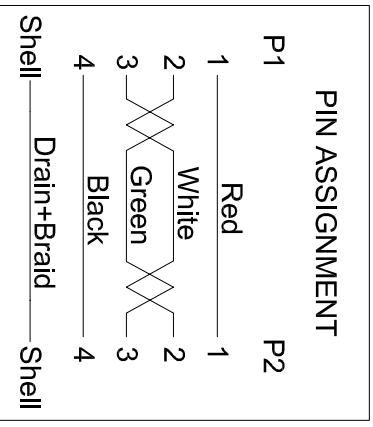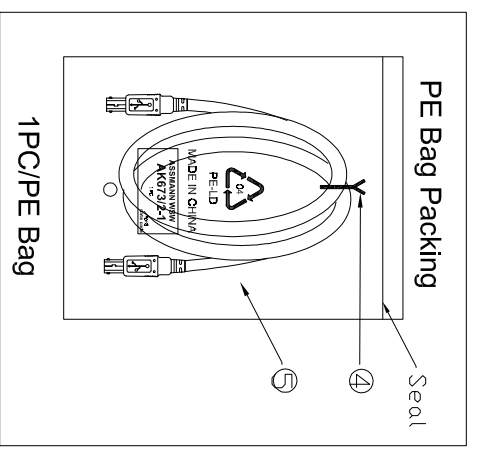

⑤	PE Bag	1	Clear Print black "MADE IN CHINA" + "1PC"
④	TIE	1	White
③	Out Jacket	NA	Beige(BG002) PVC-45P
②	Cable	1	USB2.0 UL2725 28#/1P+24#/2C+AEB OD:4.7mm Beige(BG002)
①	CONN	2	USB 2.0 B Male Shell:Nickel Pin:G/F Insulator color: White

**SPECIFICATION**

**RoHS compliant**  
 Unit: mm

Scale	Free	Customer-No.
TOLERANCE		ASSMANN WSW-No.
		AK673/2-X
DIM	TOL	Drawing-No.
		ASS 7607 CA
Angle	TOL	Replace
		Sheet

①	Drawn	12.04.2016	Amy	WSW components
	Modification			

1 2 3 4 5 6 7

A B C D E F G H