


Technical Data Sheet Rev 05.220912

4 Port USB 3.2 Gen 1 Hub PCBA w/ ESD Surge Protection & Port Status LEDs

Model Number: USBG-3X4MR2-PCBA

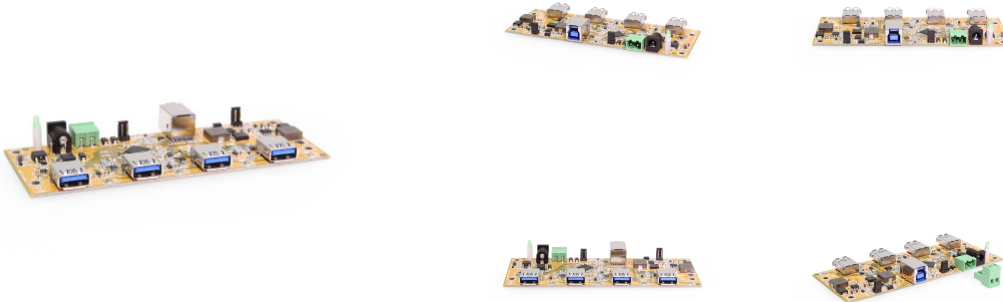

Features

- USB 3.2 Gen 1 compliant
- Charges all 4 USB Ports up to 1.5A Each Simultaneously
- Provides 4 LEDs Indicating Data Transferring for each Port
- Supports 15KV ESD Surge Protection for Each Port
- Multi Transaction Translators (Multi-TT)

Package Contents

- Hub - Board Only

Specifications

OVERVIEW

Model No	USBG-3X4MR2-PCBA
Product Type	USB Hub
Compliance	CE FCC REACH RoHS TAA
UPC	045079163522
Country of Origin	Taiwan
LED indicators	Port Status Power
Chipset	GL3520
Electrical Protections	15KV

PHYSICAL

Ship Weight (lbs)	0.14 lbs
Ship Weight (kg)	0.06 kg
Item Weight	0.12 lbs
Length	5.55 inches
Width	2.24 inches
Height	0.70 inches
Material	N/A
Color	Yellow
Mountable	Bare PCB

Specifications Cont.

CONNECTIONS

USB Specification	USB 3.2 Gen 1
Maximum Data Rate	5 Gbps
Downstream Port Count	4
Downstream Port Type	4x Type A USB 3.2 G1 / 3.0
Works as Standalone Charger	Y - Can be used without Host
Can be Bus Powered	Y - Supports Bus Power
Bus Power Isolation Supports Disabling Bus Power	Y

Power

Input Voltage	7 ~ 48V DC
Power Connector	DC barrel, 2.1 ID x 5.5 OD, Center Pin Positive
Supported Charge Protocols	DCP

ENVIRONMENTAL

Operating Temperature	0C ~ 55C
Storage Temperature	-20C ~ 75C
Operating Humidity	5% to 95% RH

OS SUPPORT

Supported Operating Systems	OS independent - No software or drivers required
-----------------------------	--

WARRANTY

Warranty Period	1 Year
-----------------	--------

PRODUCT URL

USBG-3X4MR2-PCBA Product Page	https://www.coolgear.com/product/4-port-usb-3-2-gen-1-hub-pcba-w-esd-surge-protection-port-status-leds-copy
----------------------------------	---