

ITEM	PART#	DESCRIPTION	QTY	UOM
A,B	39014051	MiniFit Jr Rcpt SR V-0 5Ckt	2	PC
C	39000089	MiniFit Term Crp Fem Chn Bs 30Au 16awg	10	PC
D	--	PAPER PRINTED PAPER WHITE	1	PC

FROM	TO	DESCRIPTION	COLOR
A1	B5	1X16AWG DISC PVC BK UL1015 HOOKUP	BLACK
A2	B4	1X16AWG DISC PVC BK UL1015 HOOKUP	BLACK
A3	B3	1X16AWG DISC PVC BK UL1015 HOOKUP	BLACK
A4	B2	1X16AWG DISC PVC BK UL1015 HOOKUP	BLACK
A5	B1	1X16AWG DISC PVC BK UL1015 HOOKUP	BLACK

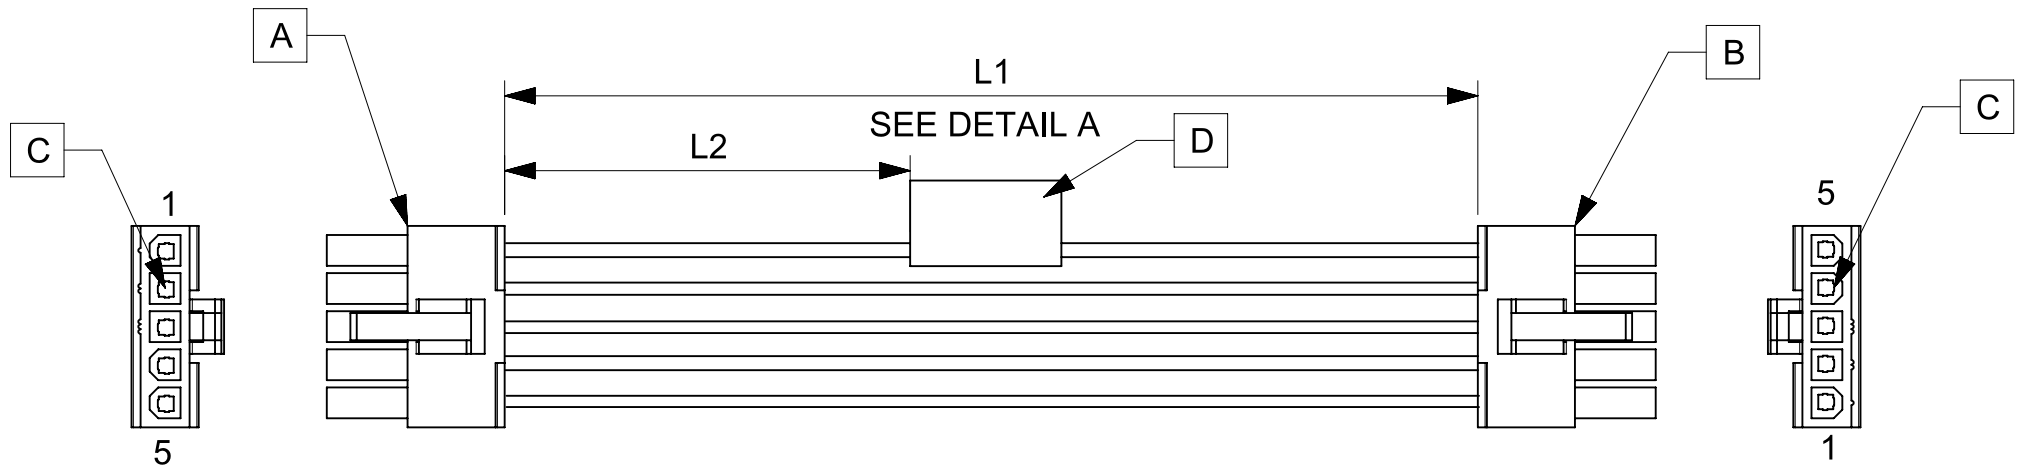


TABLE			
PART NUMBER	L1	L2	TITLE
2153202051	150±8	63 REF	MINIFIT JR SR R-R 5 CIRCUIT 150MM Au
2153202052	300±10	138 REF	MINIFIT JR SR R-R 5 CIRCUIT 300MM Au
2153202053	600±10	288 REF	MINIFIT JR SR R-R 5 CIRCUIT 600MM Au

- NOTES**
1. Cable assembly must pass 100% continuity and polarity test.
 2. Connector view shown is from mating side.
 3. Label text must be 2mm max. in height with Arial font.
 4. Label must be wrapped in flag type on a single cable.

MOLEX P/N
MOLEX
BATCH WK/YR
DETAIL A

REVISION			
DATE	REV	DESCRIPTION	CHANGER
2020/03/23	A	INITIAL RELEASE	ARAJU

FUNCTIONAL SYMBOLS $\frac{E}{A} = 0$ $\frac{E}{E} = 0$ $\frac{E}{P} = 0$ DIVISIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		CURRENT REV DESC:		
	DIMENSION UNITS	SCALE	GENERAL TOLERANCES (UNLESS SPECIFIED)		
	mm	NTS	ANGULAR TOL ± °		
	4 PLACES ±		EC NO: 638380		
3 PLACES ±		DRWN: AS20		2020/03/23	
2 PLACES ±		CHK'D: RDESAI01		2020/05/28	
1 PLACE ±		APPR: RDESAI01		2020/05/28	
0 PLACES ±		INITIAL REVISION:		DRWN: AS20	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION	DRAWING	SERIES	DOCUMENT NUMBER
			A4-SIZE	215320	2153202051
					DOC TYPE
					PSD
					DOC PART
					000
					REVISION
					A
					SHEET NUMBER
					1 OF 1