



ISSUE NUMBER	
ORIGINAL	(1)

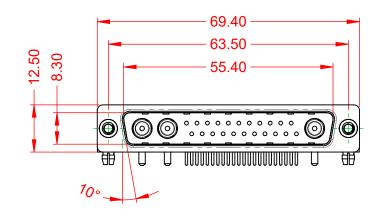



NOTES:


MATERIAL: HOUSING: SHELL: CONTACT:

DIELECTRIC

**OPERATING TEMPERATURE:** 

WITHSTANDING VOLTAGE:

THERMOPLASTIC POLYESTER, UL94V-0 STEEL, TIN PLATED COPPER ALLOY, 30µ" GOLD PLATED




POWER/C	CO-AX CONTA ENT)	CT RATING:	10A (CURRENT)
	CONTACT CUR		5A PER CONTACT 10mΩ MAX.
INSULAT	OR RESISTAN	CE:	5000MΩ min.

.XX ±0.13 .XXX ±0.05

-55°C ~ 125°C

1000V AC rms



			SW REFERENCE NO.: 629 COMBO ASSEMBLY			
COMBINATION D-SUB		DRAWN: C.B	DATE: JAN. 01/20	19		
			DATE:			
EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	2		
YOUR CONNECTION TO QUALITY & SERVICE		DRAWING NUMBER: 629-25W	3640-1T3	ISSUE		
		PART NUMBER: 629-25W	3640-1T3	1		



COMPLIANT

THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

