


THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION. ANY REPRODUCTION, DISCLOSURE, OR USE OF ITS CONTENTS IS EXPRESSLY PROHIBITED EXCEPT AS AUTHORIZED BY I.F. Engineering Corp

REVISION			
LTR.	DESCRIPTION	DATE	APPVL.
-	PRELIM	-	-

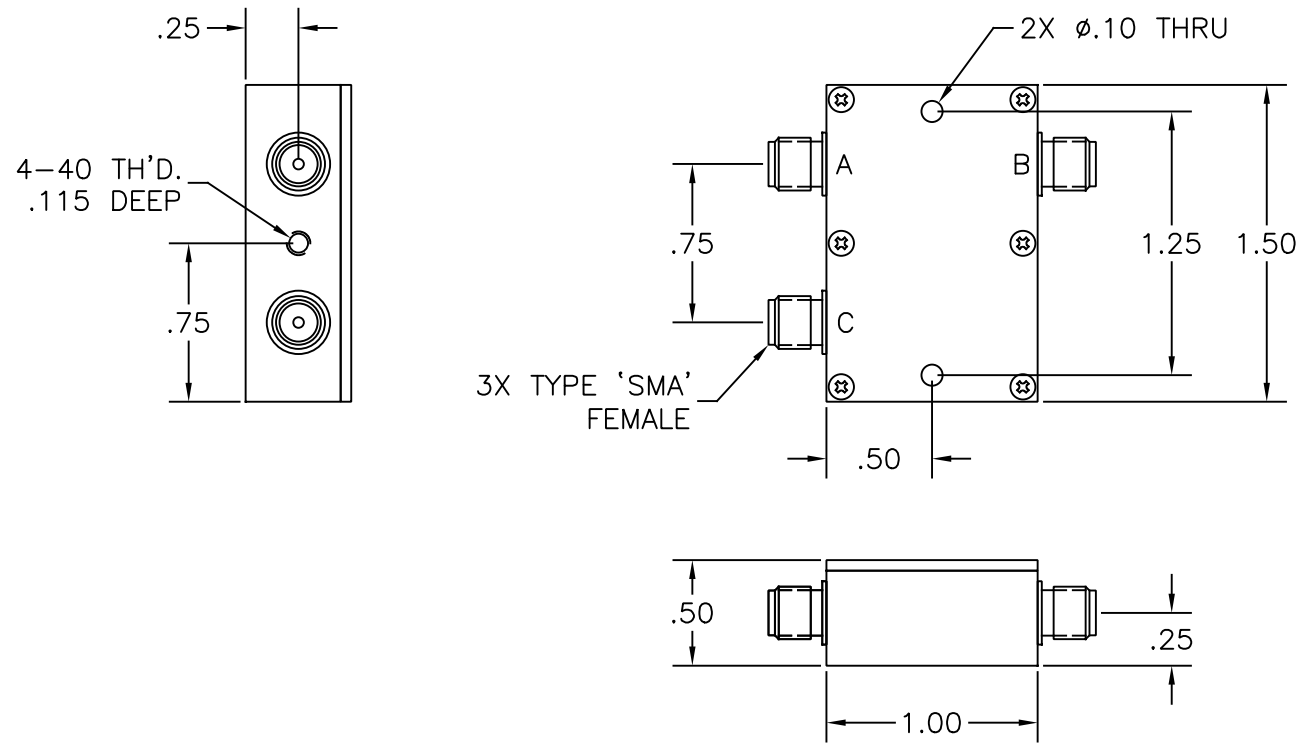

ELECTRICAL SPECIFICATION DIRECTIONAL COUPLER	
FREQUENCY RANGE (MHZ)	950-2150
COUPLING (dB) NOM.	6
COUPLING TOL. (dB) MAX.	±1.2
COUPLING VARIATION (dB) MAX.	±1.2
INSERTION LOSS (dB) MAX.	0.75
DIRECTIVITY (dB) MAX.	15
VSWR IN	1.4:1
VSWR OUT	1.4:1
VSWR COUPLED	1.6:1
IMPEDANCE (OHMS) NOM.	50
TEMPERATURE RANGE (°C)	0 TO +50

NOTE: INSERTION LOSS DOES NOT INCLUDE THEORETICAL COUPLING LOSS.

PORT	DESIG.
A	INPUT
B	OUTPUT
C	COUPLED

**RoHS
Compliant**

 THIRD ANGLE PROJECTION	DRAWN	DATE
	MJD	3/9/20
UNLESS OTHERWISE SPECIFIED DIMENSIONS MEASURED IN INCHES DRAWING PRACTICES PER ASME Y14.100	ENGRG APPD	DATE
	MFG APPD	DATE
TOLERANCES ANGLES ±1/2° .XX ±.01 .XXX ±.005	QA APPD	DATE
	RELEASED	DATE
MATERIAL: SEE NOTE 1		
FINISH: SEE NOTE 2		

***I F E* ENGINEERING**
3 FOSHAY ROAD, DUDLEY MA 01571

TITLE
OUTLINE DRAWING
C3-6-LB3-S

SIZE	CODE IDENT NO.	DRAWING NO.	REV.
A	OUF A1	110-296-181	-
SCALE	1:1	SHEET	1 OF 1

- NOTES:
1. MATERIAL: CHASSIS & COVER ALUMINUM
 2. FINISH: CLEAR CHROMATE
 3. SPECIFICATION SUBJECT TO CHANGE WITHOUT NOTICE