



THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
H	-				
D		REVISED PER ECO-13-015151	16DEC2013	FL	FY

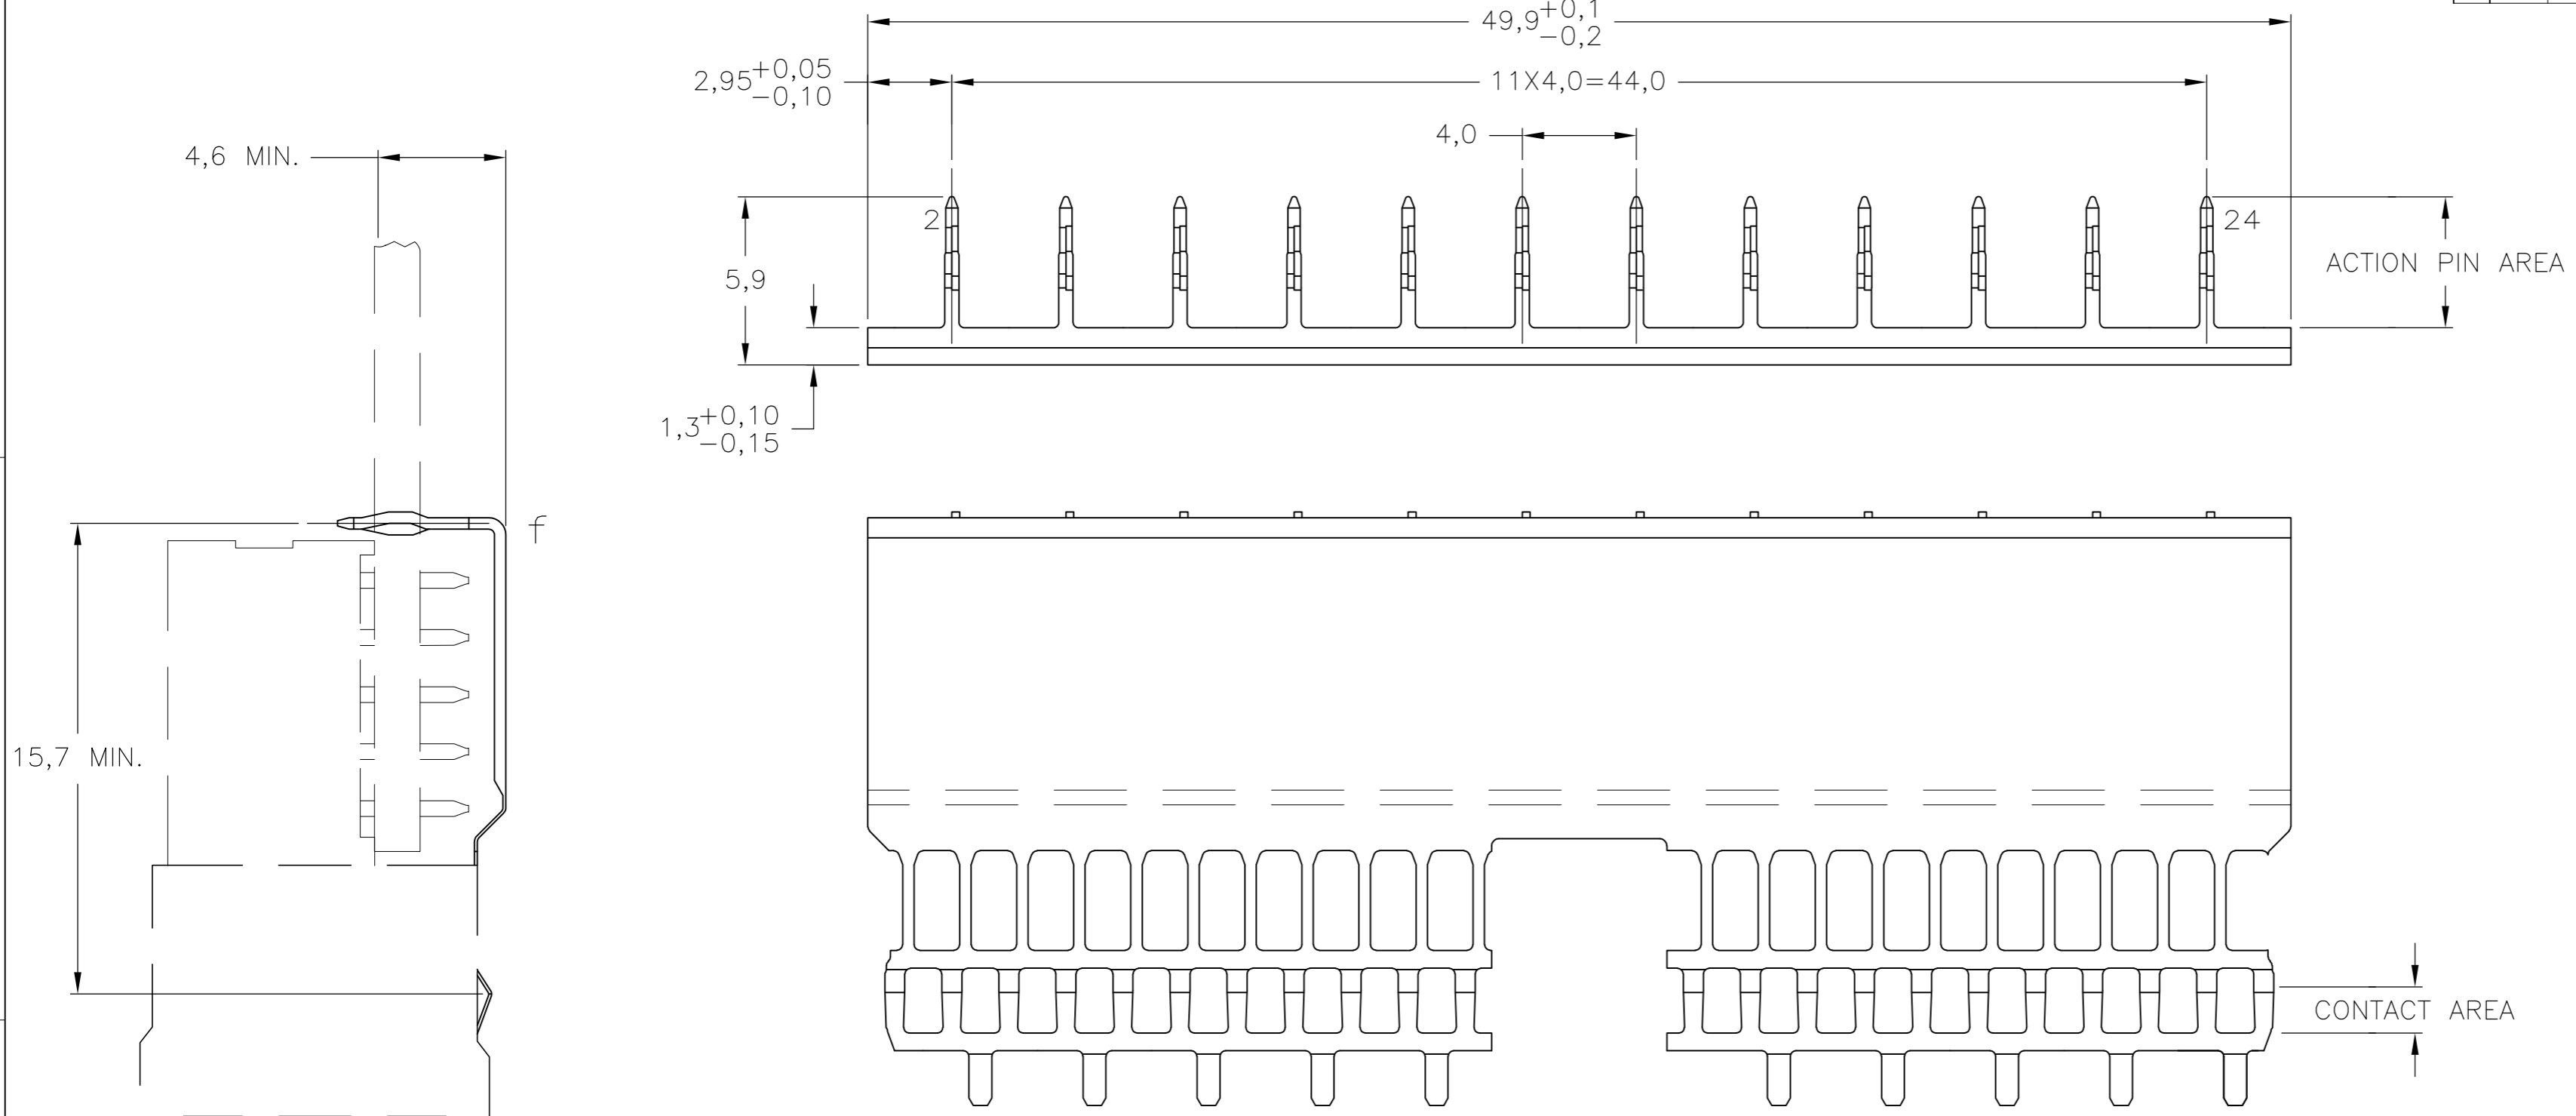

NOTES:

- △ GENERAL PLATING SPECIFICATION: UNDERPLATING (ENTIRE CONTACT): 1,27µm NICKEL MIN. AND ACTION PIN: 0,5µm TIN MIN. FOR PLATING OF MATING SURFACES SEE PERFORMANCE LEVEL SHOWN IN PART NUMBER TABLE.
- △ MATERIAL; PHOSPHORBRONZE.
- △ ROW "f" 12 PLATED THROUGH HOLES FOR LOWERSHIELD.
- △ HOLE PATTERN FOR FEMALE CONNECTOR TYPE A WITH UPPERSHIELD, 110+13 PLATED-THROUGH HOLES AT 2x2mm SQUARE GRID.
- 5 MAX. BOARD THICKNESS 3,5 mm.
- △ SHIELDS LUBRICATED WITH BELLCORE APPROVED LUBRICANT. TECHNICAL REF: TR-NWT-001217 ISSUE 1, SEPT. 1992.
- △ CONFORMS TO ALL TESTING ACCORDING IEC 61076-4-101 PERFORMANCE LEVEL 2.
- △ CONFORMS TO ALL TESTING ACCORDING IEC 61076-4-101 PERFORMANCE LEVEL 1.
- △ CONNECTOR TESTED AND QUALIFIED AGAINST TELCORDIA GR-1217-CORE QUALITY LEVEL III, CENTRAL OFFICE APPLICATIONS.
- △ 0.76µm MIN GOLD PLATING AT MATING SURFACE.

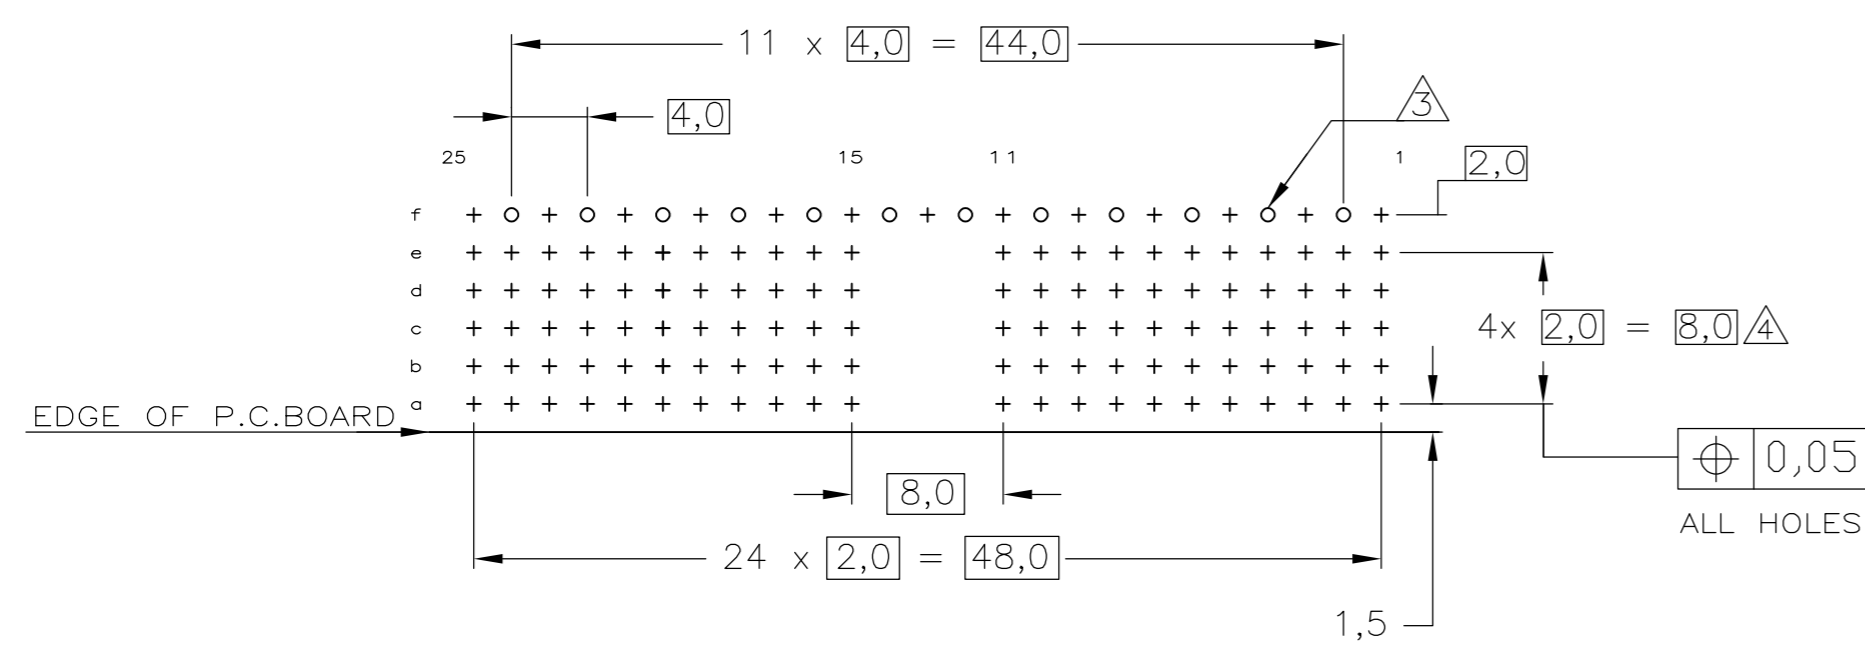

COMPONENT SIDE AS SHOWN
 RECOMMENDED PCB-HOLE LAY-OUT

P.C.B. HOLE DIM. ACTION PIN
 FOR DETAILS SEE APPLICATION SPECIFICATION

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	1.3AUG04	K.N.KIRAN	
DIMENSIONS: mm		CHK	25MAR05	B.MOOIJ	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	25MAR05	B.MOOIJ	
0-PLC ±		PRODUCT SPEC		108-19082	
1-PLC ±		APPLICATION SPEC		114-19029	
2-PLC ±		WEIGHT		-	
3-PLC ±		FINISH		-	
4-PLC ±		CUSTOMER DRAWING			
ANGLES ±		SCALE	5:1	SHEET 1 of 1	
MATERIAL		SIZE	A2	CAGE CODE	00779
		DRAWING NO	C=5338108		RESTRICTED TO
		NAME	Z-PACK 2mm HM GROUND RETURN LOWER SHIELD TYPE A		
		FINISH	4-5338108-0		
		MATERIAL	5338108-9		
		PARTNUMBER	5338108-2		