
יד Q ד	m		0	₿ >		
Z D D D D D D D D D D D D D D D D D D D						4
۵	I		LAYOUT SHOWN AS EXA	MPLE		3
Keyi	ng Shown as example					
CHARACTERISTICS	Connector dimension					
 Standard : Based on MIL-DTL-38999 Series III Shell Material : Aluminium Shell Plating : Olive drab Cadmium Insulator : Thermoplastic Contacts : Copper Alloy Seals & Grommet : Silicon Elastomer Contact Plating : Gold over copper Alloy 0.8µm minimum 	DimNominalØS41.7 MaxZ31 MaxVV THREADM31x1-6g		SOURIAU shall not be liable for any n due to a use of the Products which the Specifications issued by either of th (professional recommendation Country FR	n does not comply with e Parties or by a third party		2
-Durability: 500 Mating cycles-Delivered with Souriau contacts and Accessories			PN: 8D521W4	42PE		
-Temperature Range : -65°C to +175°C -Salt Spray : 500 hours		A 10-10-2016 ISS DATE Designed By:	First Release Latest modification - by Date:	CUSTOMER DRAWING	MOD N°	_
		TITLE	Aluminium Plug 8D series			
BASIC SERIES: 8D 5 - 21 W 42 P SHELL TYPE : Plug with RFI Shielding	E	SCALE -{	General linear Tolerances: ±	NPRDS / PROJECT 859		_
CONTACT TYPE : Standard Crimp Contact SHELL SIZE : 21	ORIENTATION : E CONTACT TYPE : PIN(500 Matings)	SOURIAU	WWW.SOURIAU.CO	M This document is the pro SOURIAU it must not be reprodu communicated without p	ced or	
PLATING : W = Olive drab Cadmium	CONTACT LAYOUT : 21-42	FORMAT A3	SOURIAU D	DRG N°	SHEET 1/2	_
			8D521W4	ZYE-U	1/2	

	тт	െ	н Г	m	D	0	
4	(Contact Layout 42					
	Ctc A B	2#4 Power 21-42 X Y 0 6.19 0 -6.19					
ω							
	 -					SOURIAU shall not be liab due to a use of the Pro the Specifications issued by (professional recor	oducts wh either o mmendat
N						PN: 8D	Countr FR
					A 10-10-20 ISS DATE Designed By:	16 First Release Latest modification - by Date:	
<u> </u>					SCALE NA	Genera 	Alumin al linear ances: :
					FORMAT A3	SOU	
l	Н	G	F	E	D	C	

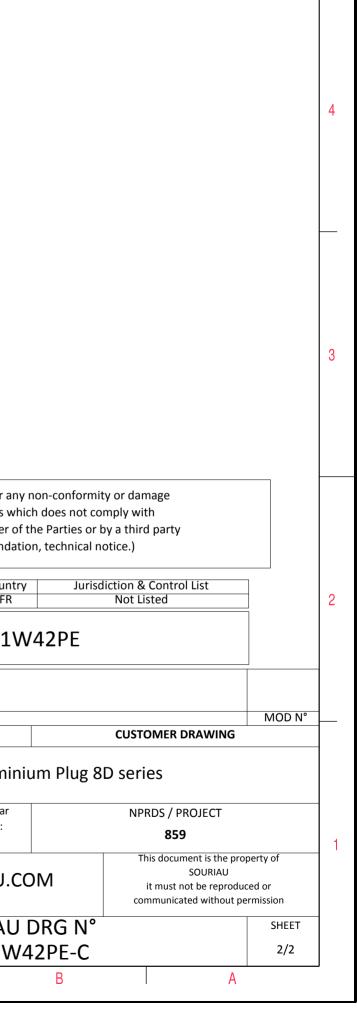

 \triangleright

σ