


| NO. | MASSE / DIMENSION |
|-----|-------------------|
| A   | 62.8              |
| B   | 2 1/4-16UN-2B     |
| C1  | 31.8              |
| C2  | 26.8              |
| D   | 76                |

| NO. | BESCHREIBUNG / DESCRIPTION          |
|-----|-------------------------------------|
| 1   | ISOLIERKÖRPER STIFT / INSULATOR PIN |
| 3   | DICHTKÖRPER / GROMMET               |
| 4   | ENDRING / ENDRING                   |
| 5   | KONTAKTSTIFT/ CONTACT PIN           |
| 7   | ZYLINDERGHÄUSE / BARREL             |
| 9   | ÜBERWURFMUTTER / COUPLING NUT       |
| 12  | ENDGEHÄUSE / ENDBELL                |

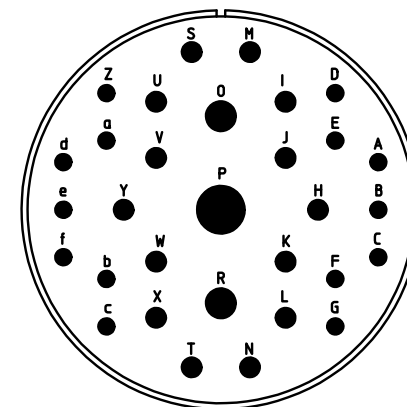

Note: Due to an automatic nomenclature system, numbers generated may not be sequential.  
 Specification and Dimensions subject to change  
 Drawings illustrate normal insulator positioning

|                                |  |
|--------------------------------|--|
| <b>Material Specification:</b> |  |
| Shell Material:                | Aluminium alloy                                  |
| Shell Plating:                 | Olive drab chromate coating over cadmium plating |
| Insulator Material:            | Neoprene   |
| Contact Material:              | Copper alloy                                     |
| Contact Plating:               | Hard silver                                      |

all dimensions are in mm  
 Dimensions without tolerance indications are general tolerances in acc. with DIN7168m

drawing for  
 CUSTOMER



description CA3106E36-9P-F80-F0  
 Plug, straight  
 Endbell with clamp and bushing  
 AWG Crimp / Pin / Layout: 36-9

© All rights reserved. Reproduction or issue to third in any form  
 whatever is only permitted with written authorization of ITT Cannon

page 1/1  
 revision 929 11. Jun 19