

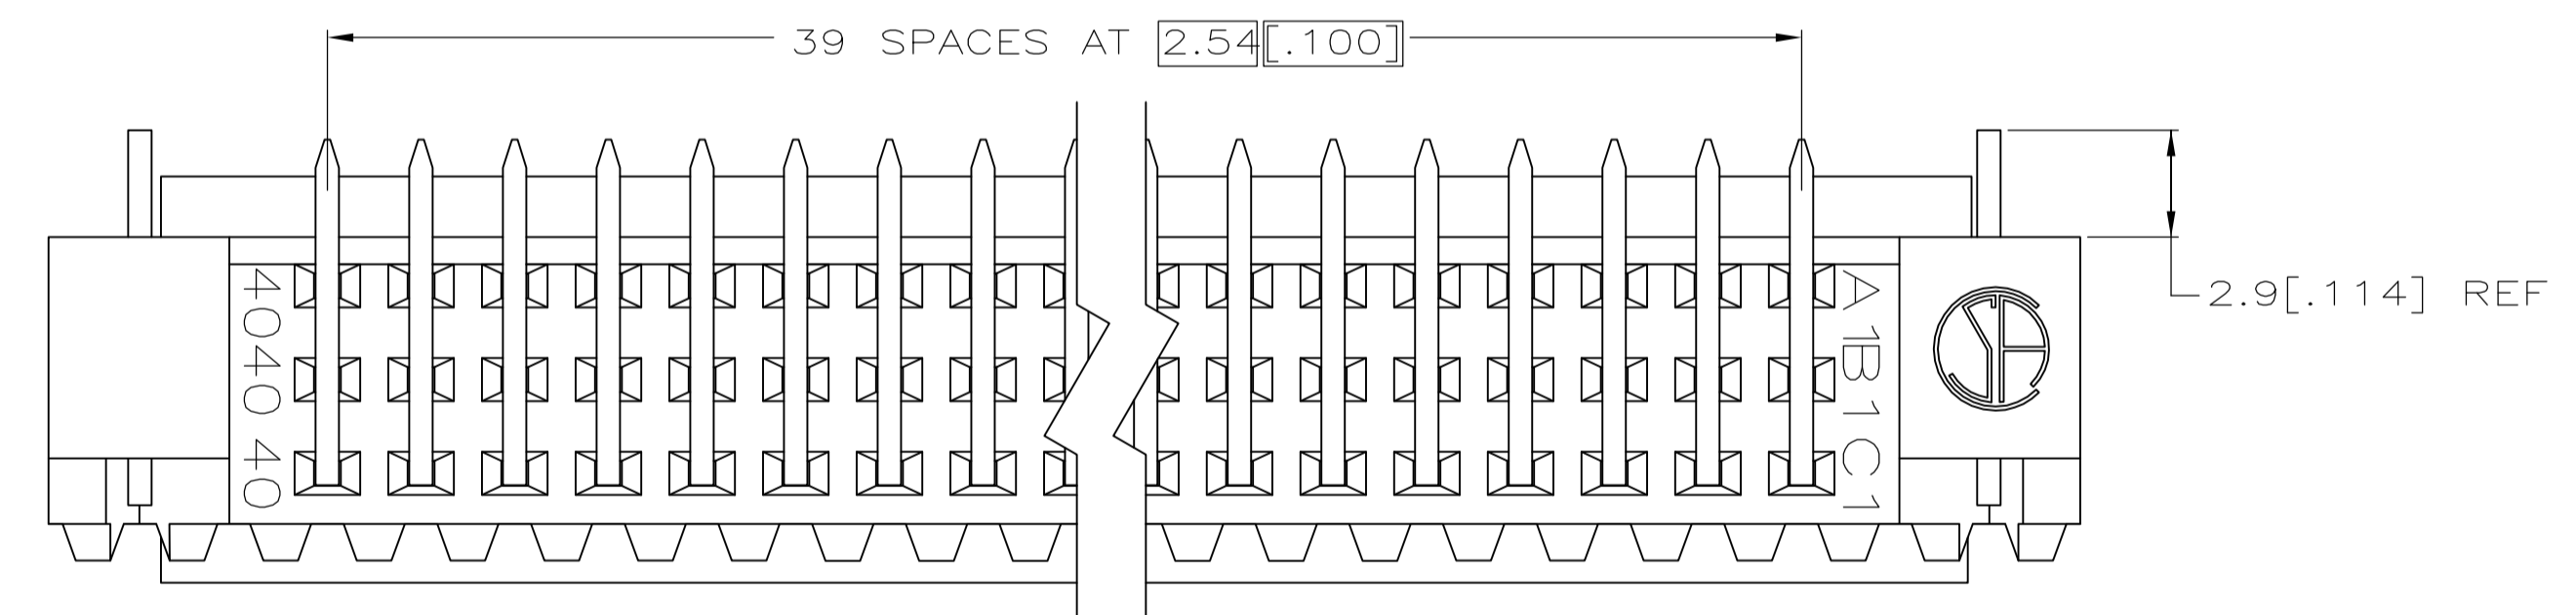
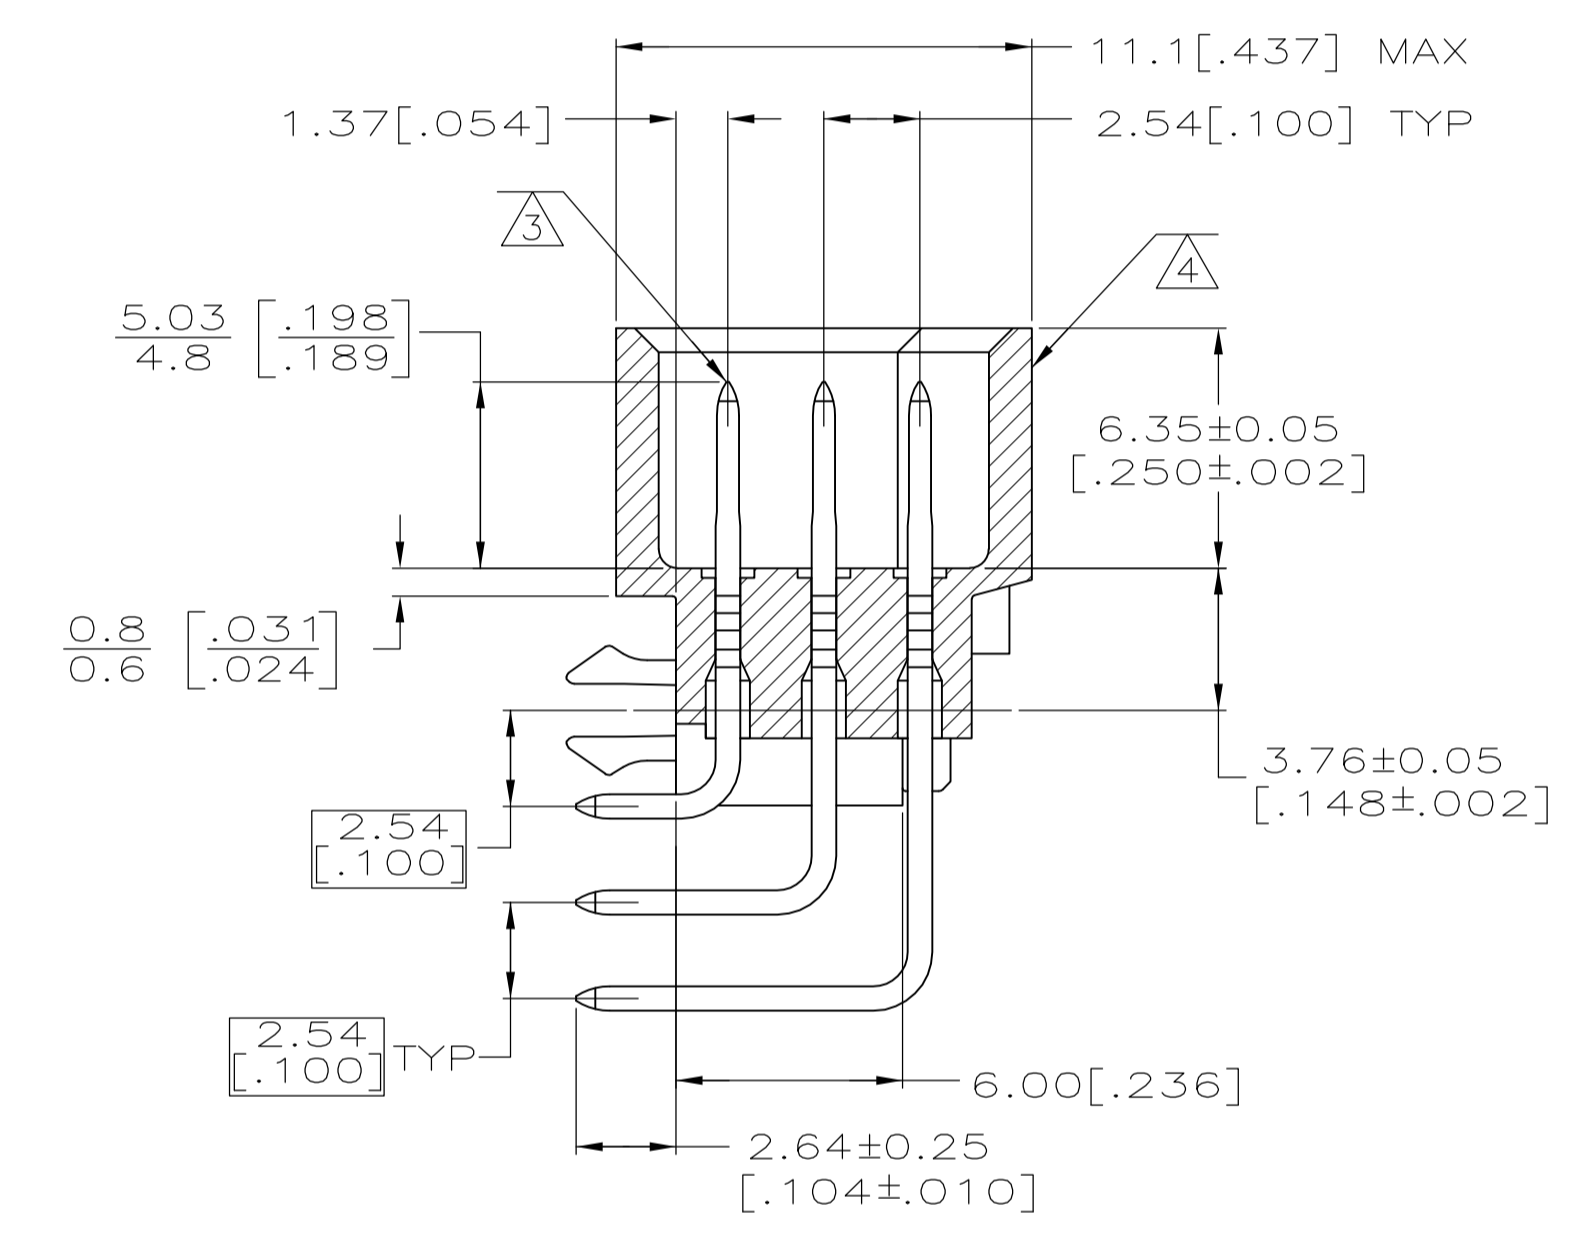


- ⚠ HOUSING MATERIAL: GLASS-FILLED POLYMER.
- ⚠ POST MATERIAL: COPPER ALLOY.
- ⚠ POST FINISH: DIN 41612 CLASS 2 IN CONTACT AREA. TIN PLATING ON POSTS.
- ⚠ MARKING ON THIS SIDE.
- ⚠ RECOMMENDED HOLE SIZE FOR MANUAL APPLICATION OF CONNECTOR ONTO PC BOARD.
- ⚠ PART NUMBER, DATE CODE MARKED THIS APPROXIMATE AREA.

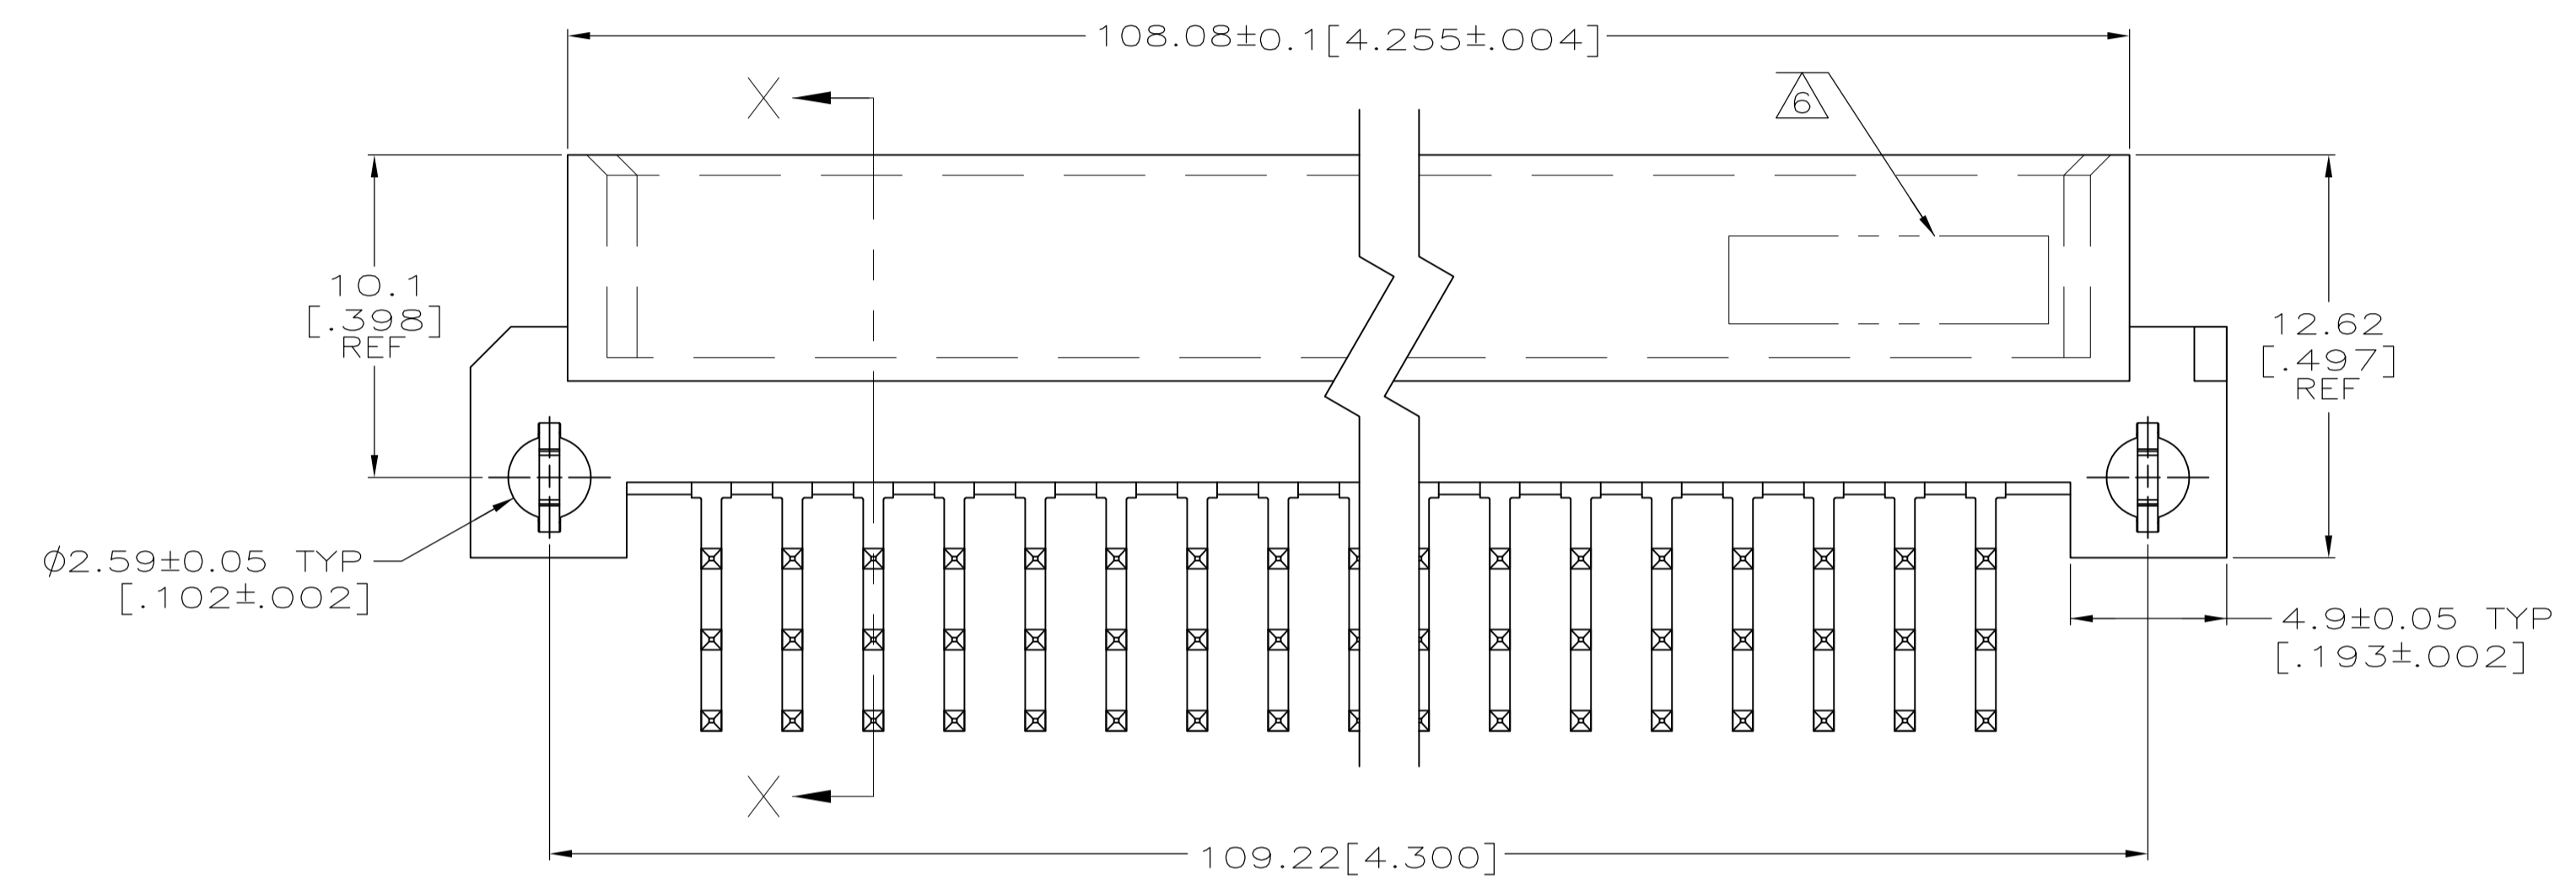

REFERENCE FAMILY DRAWING 650473 FOR ALL TYPE C HEADER OFFERINGS

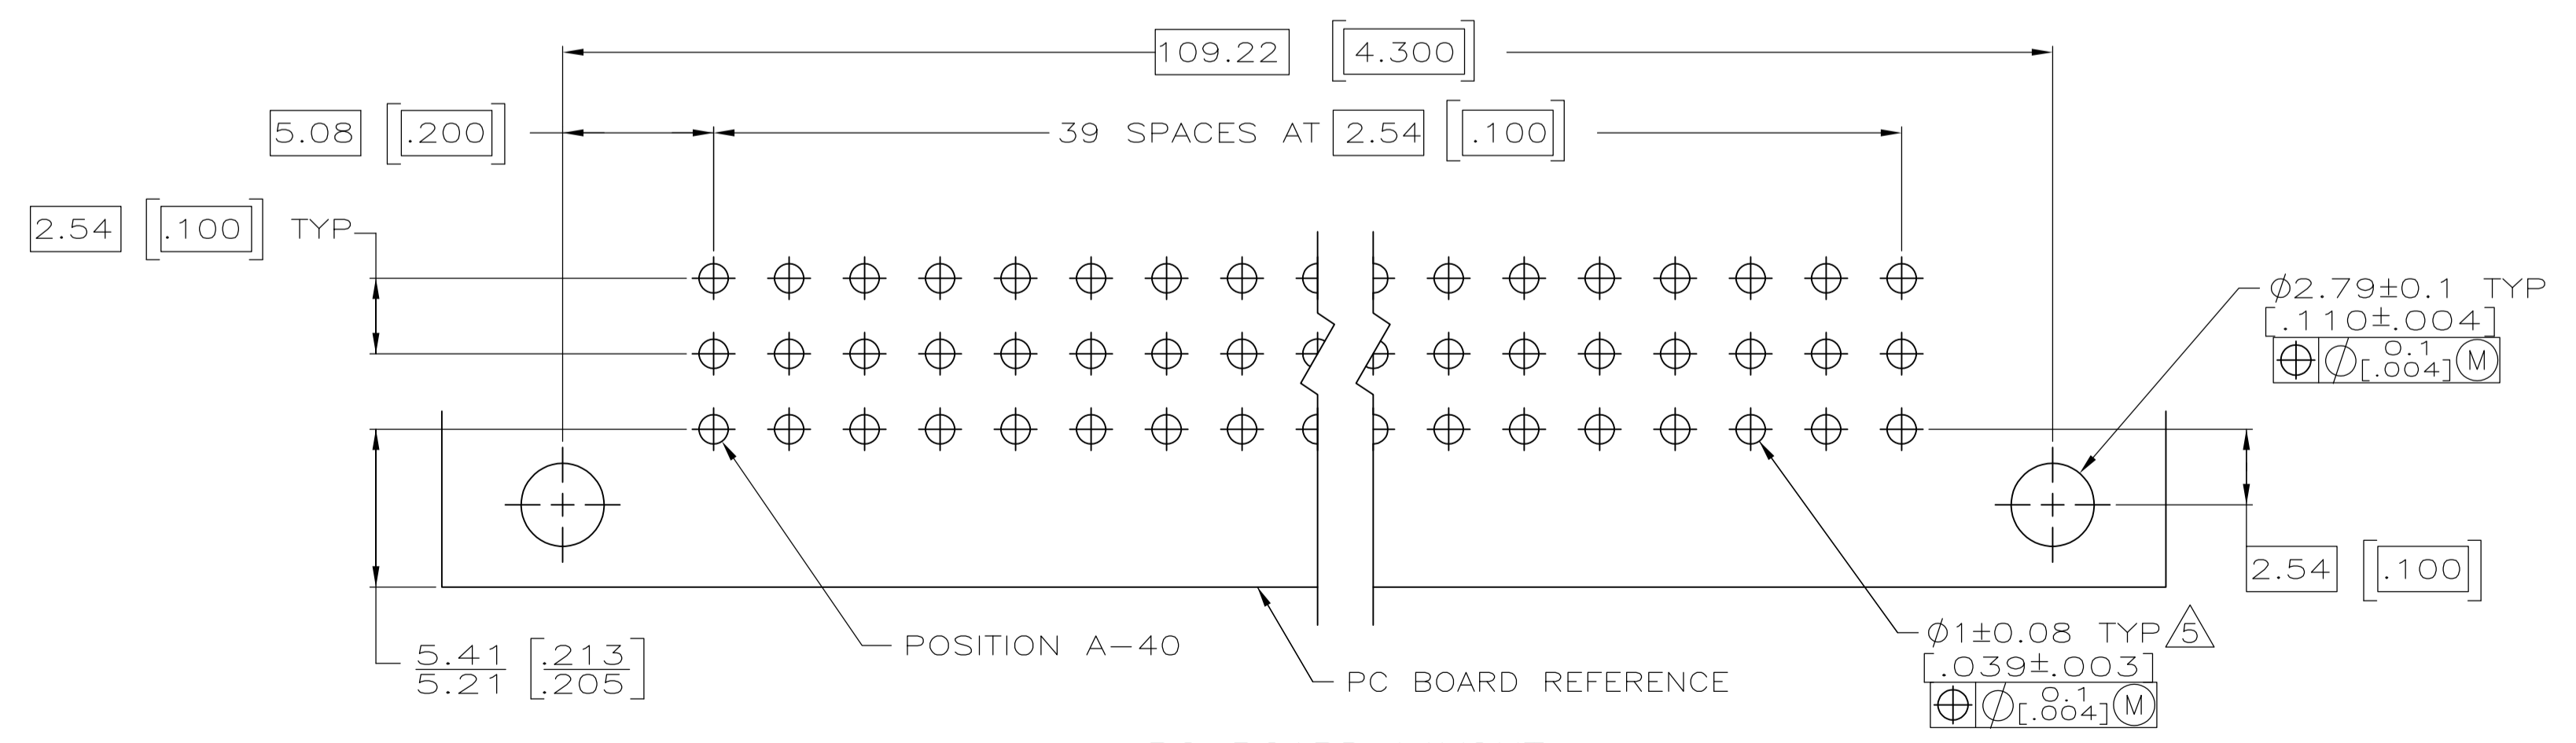

PC BOARD LAYOUT
RECOMMENDED PC BOARD THICKNESS 1.57 [0.062]

1-40	X	X	X	120	5650914-5
POSITIONS LOADED	C	B	A	NO. OF LOADED POSITION	ASSY PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DIN J. POLIGNONE OSMAVOS		APVD A. SHARPE OSMAVOS		NAME ASSEMBLY, PIN, EUROCARD, TYPE C, 120 POSITION, 2.64 [0.104] SOLDER POST, WITH BOARD LOCKS	
DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPLICATION SPEC		SIZE CASE CODE DRAWING NO. RESTRICTED TO	
0 PLC ± -		1 PLC ± -		2 PLC ± 0.13 [0.005]		A1 00779 C=5650914	
3 PLC ± -		4 PLC ± -		ANGLES ± -		WEIGHT -	
MATERIAL		FINISH		CUSTOMER DRAWING		SCALE 5:1 SHEET 1 OF 1 REV A	