
ی ع	н г	m	C		0	Ξ		
	M Thread							4
	Keying Shown	as example			LAYOUT SHOWN	N AS EXAMPLE		3
CHARACTERISTICS	Į	Connector dimension	7					
-Standard : Based on MIL-DTL-38999 Series III -Shell Material : Aluminium -Shell Plating : Black Zinc Nickel -Insulator : Thermoplastic -Contacts : Copper Alloy -Seals & Grommet : Silicon Elastomer -Contact Plating : Gold over copper Alloy O) 8um minimum	DimNominalØS25 MaxZ31 MaxVV THREADM15x1-6g			the Specifications issued by ei (professional recomm	tcts which does not comply w ther of the Parties or by a th nendation, technical notice.) Country Jurisdiction	with ird party	2
-Durability : 500 Mating cycles -Delivered without Souriau contacts -Temperature Range : -65°C to +175°C			Г		1	11ZO4PEL		
-Salt Spray : 500 hours -Mass : 14.24 g ± 10%			-	A 18-10-2016 ISS DATE Designed By:	First Release Latest modification - by Date:	CUS	STOMER DRAWING	DD N°
	TITLE Aluminium Plug 8D series				ries			
BASIC SERIES: 8D 5 → SHELL TYPE : Plug with RFI Shielding	- 11 Z 04 P E	L Delivered V	N/O Contacts	SCALE -	General li Toleranc ±		NPRDS / PROJECT 859 This document is the property of	
CONTACT TYPE : Standard Crimp Contact SHELL SIZE : 11						SOURIAU WWW.SOURIAU.COM Inis document is the property of SOURIAU it must not be reproduced or communicated without permission		
PLATING : Z = Black Zinc Nickel		CONTACT LA	YOUT : 11-04	format A3		IAU DRG N° 1Z04PEL-C		HEET 1/2
H G	F	E		D I	C	B	A	

ſ	Ξ	G	п П	m		0	
		Contact Layout					
4	-X	$ \begin{array}{c} $					
	Shell Arrangement Numb	X-axis (mm) Y-axis (mm) +.065 (1.65) +.065 (1.65) +.065 (1.65) 065 (1.65) 065 (1.65) 065 (1.65) 065 (1.65) +.065 (1.65)	1				
ω	size no. conta 11 -4 4						
	┣-					SOURIAU shall not be liak due to a use of the Pro the Specifications issued by	oducts w
S						(professional reco	Count FR
					A 18-10-20 ISS DATE	D16 First Release	05112
					Designed By: TITLE SCALE	Date:	Alumir
_					NA SOURIA		rances: ± RIAU.(
					FORMAT A3		IRIAL 511Z(
L	Н	G	F	E	D	С	

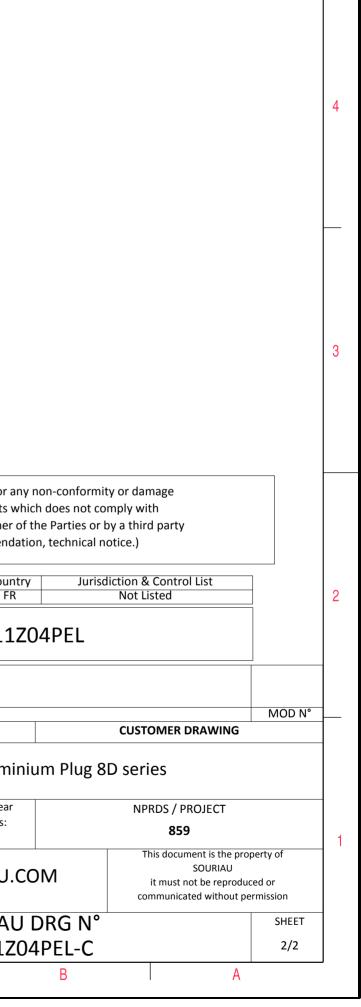

 \triangleright

σ