



S21 TRANS LOG MAG.
▶0.000 dB 0.100 dB/DIU

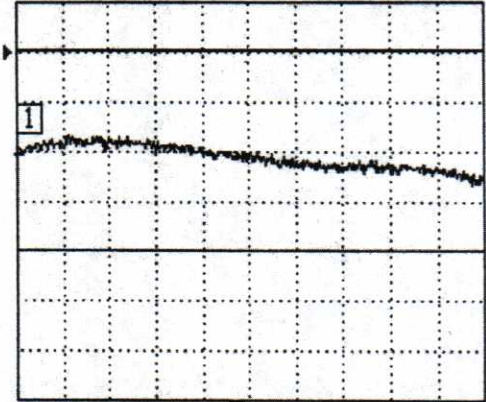


0.800000000 GHz 1.000000000

S11 REFL LOG MAG.
▶0.000 dB 5.000 dB/DIU

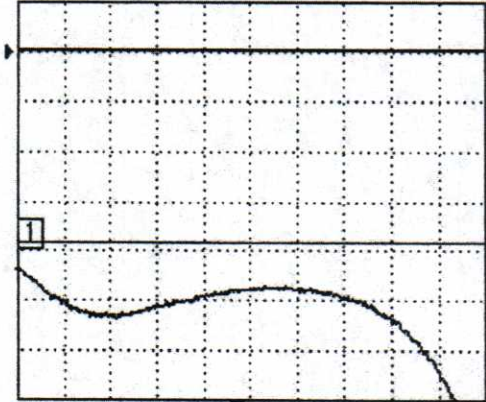


0.800000000 GHz 1.000000000

S22 REFL LOG MAG.
▶0.000 dB 5.000 dB/DIU

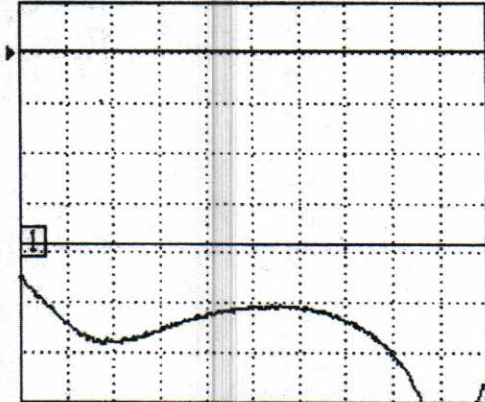

0.800000000 GHz 1.000000000

S12 TRANS LOG MAG.
▶0.000 dB 5.000 dB/DIU

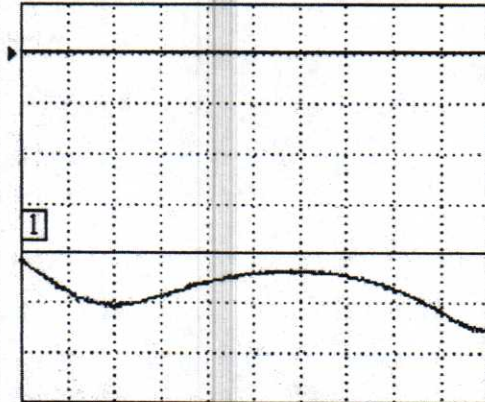

0.800000000 GHz 1.000000000

CH 4 - S12
0.0000 mm REF
0.000 dB OFFSET
0.00° OFFSET

MARKER 1
0.800000000 GHz
-20.809 dB

▶MARKER TO MAX
MARKER TO MIN

MARKER READOUT
FUNCTIONS

D3C0810S circulator
800 - 1000 MHz
20 / .4 / 1.25
SMA-F connectors