

Pin strip - PST 1,3/ 3-5,0-SF - 1805630

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)

Pin strip, nominal current: 12 A, number of positions: 3, pitch: 5 mm, color: black, contact surface: Tin, mounting: THR soldering, Specifically for PTS 1,5/...-PH



The figure shows a 10-position version of the product

Your advantages

- Suitable for wave and reflow soldering processes
- Locking mechanism on back of component for increased mechanical stability



Key Commercial Data

Packing unit	250 pc
GTIN	
GTIN	4046356680042

Technical data

Dimensions

Length [l]	5.7 mm
Width	14.8 mm
Pitch	5 mm
Dimension a	10 mm
Width [w]	14.8 mm
Height [h]	13 mm
Height	9.4 mm
Length of the solder pin	3.6 mm
Pin dimensions	ø 1.3 mm
Length	5.7 mm

General

Range of articles	PST 1,3/...-SF
-------------------	----------------

Pin strip - PST 1,3/ 3-5,0-SF - 1805630

Technical data

General

Insulating material group	IIIa
Rated surge voltage (III/3)	4 kV
Rated surge voltage (III/2)	4 kV
Rated surge voltage (II/2)	4 kV
Rated voltage (III/3)	250 V
Rated voltage (III/2)	320 V
Rated voltage (II/2)	600 V
Connection in acc. with standard	EN-VDE
Nominal current I_N	12 A
Maximum load current	12 A (depends on the plug used)
Insulating material	PA
Flammability rating according to UL 94	V0
Color	black
Number of positions	3

Standards and Regulations

Connection in acc. with standard	EN-VDE
Flammability rating according to UL 94	V0


Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values


Drawings

Pin strip - PST 1,3/ 3-5,0-SF - 1805630

Drilling diagram

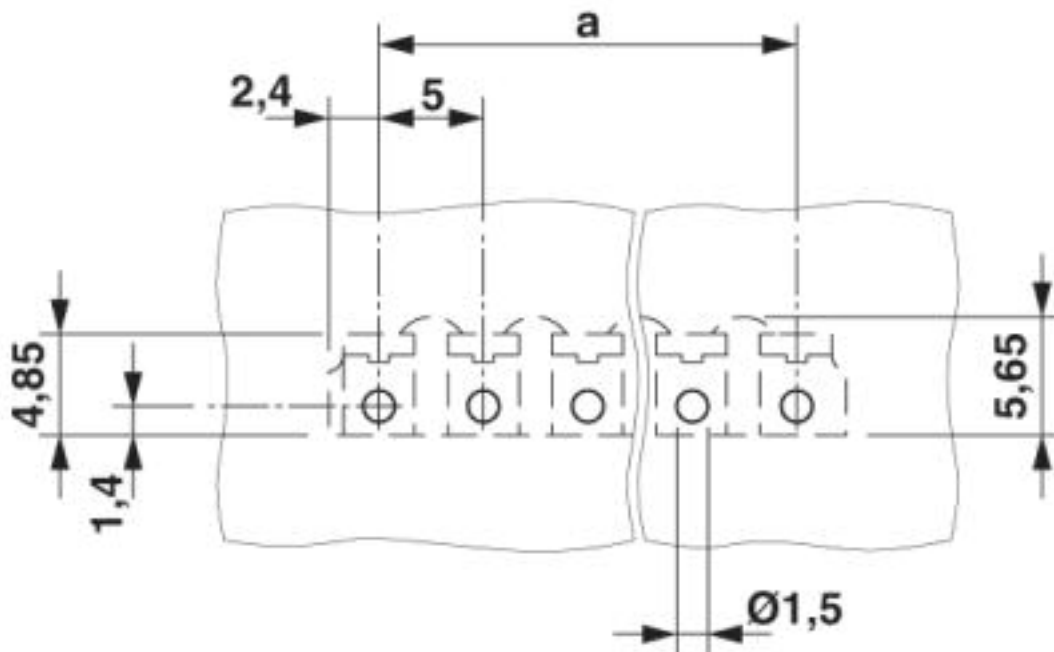

Dimensional drawing

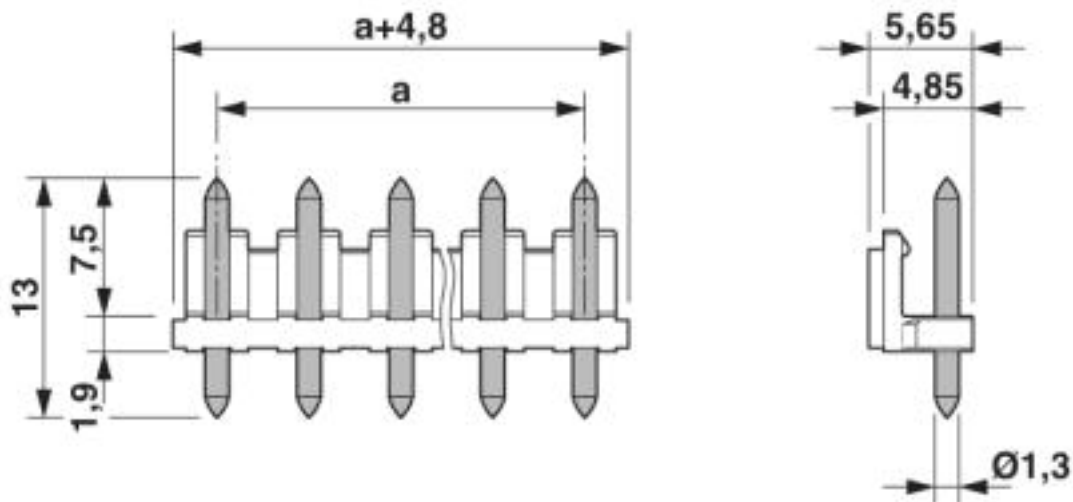

Approvals

Approvals

Approvals


IECEE CB Scheme / VDE Gutachten mit Fertigungsüberwachung / EAC


Pin strip - PST 1,3/ 3-5,0-SF - 1805630

Approvals

Ex Approvals

Approval details

IECEE CB Scheme		http://www.iecee.org/	DE1-58429
Nominal voltage UN		320 V	
Nominal current IN		10 A	

VDE Gutachten mit Fertigungsüberwachung		http://www2.vde.com/de/Institut/Online-Service/ VDE-gepruefteProdukte/Seiten/Online-Suche.aspx	40040542
Nominal voltage UN		320 V	
Nominal current IN		10 A	

EAC		B.01742	
-----	---	---------	--

Phoenix Contact 2019 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>