

THIS IS A C.A.D. GENERATED DRAWING TOLERANCE UNLESS OTHERWISE SPECIFIED DO NOT MAKE MANUAL REVISIONS TO MASTER.

ISSUE NUMBER	
ORIGINAL	(1)

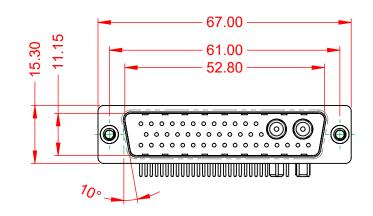




NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:

THERMOPLASTIC POLYESTER, UL94V-0 STEEL, TIN PLATED COPPER ALLOY, GOLD FLASH PLATED



40A (CURRENT) POWER/CO-AX CONTACT RATING: (IF PRESENT) SIGNAL CONTACT CURRENT RATING: 5A PER CONTACT SIGNAL CONTACT RESISTANCE: $10m\Omega$ MAX. INSULATOR RESISTANCE: 5000MΩ min. DIELECTRIC


.X ±0.25 .XX ±0.13 .XXX ±0.05

WITHSTANDING VOLTAGE:

OPERATING TEMPERATURE:

-55°C ~ 125°C

1000V AC rms



	COMBINATION D-SUB		SW REFERENCE NO.: 629 COMBO ASSEMBLY		
			DRAWN: C.B	DATE: JAN. 01/20	19
			CHECKED:	DATE:	
	EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	2
YOUR CONNECTION TO	TORONTO, ONTARIO CANADA	SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWING NUMBER: 629-43W2240-4TA		ISSUE
	YOUR CONNECTION TO QUALITY & SERVICE		PART NUMBER: 629-43W2	2240-4TA	1



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

