


A
B
C
D
E
F
G
H

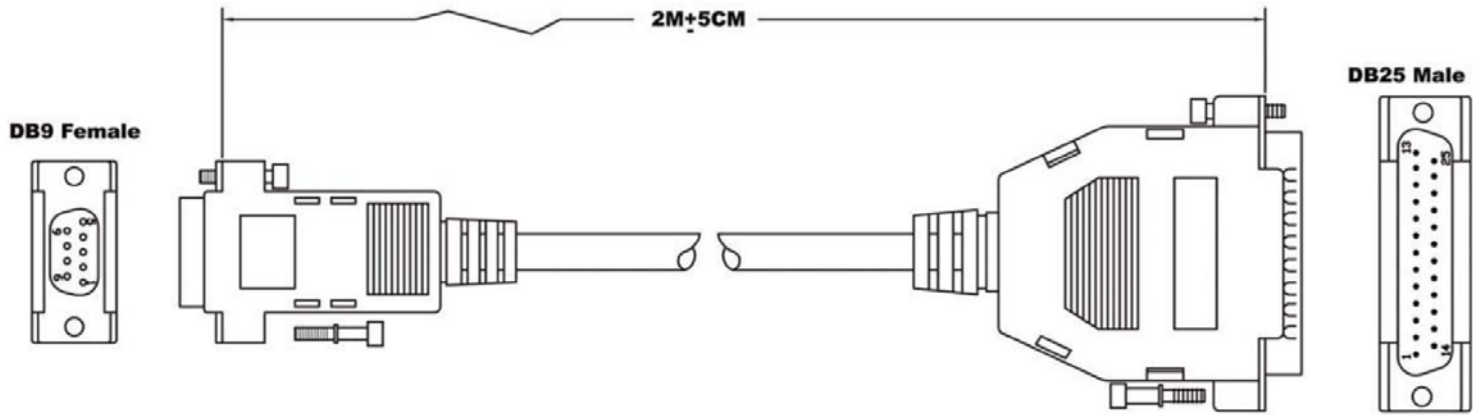

Configuration:

DB9F	DB25M
1	8
2	3
3	2
4	20
5	7
6	6
7	4
8	5
9	22
Shield	Shield

Material:

- 1. Cable: #28 9C+1+AL/MY (Beige PVC Jacket) O.D:6.0MM
- 2. Both connectors with normal type
- 3. Screw(Metal): #4-40UNC Type
- 4. Assembly(Speed Hood) Type

Notes:

- 1. Total Length: 2M±5CM
- 2. Color: Beige
- 3. Assembly Type

Scale	1:1						Name
TOLERANCE					Drawn	11.14.11	Chappell
X.X	±0.40				Approved		
X.XX	±0.25						
X.XXX	±0.15						
Angle	±3°						



Item No.	AK125-2 (2.0 M) AK128-.25 (0.25M)
Title	Null Modern Cable (AT). D-Sub 9 Pin Female to D-Sub 25 Pin Male
Drawing No.	
Replace	rev00
Sheet	

A
B
C
D
E
F
G
H