


Rev	AWO #	Description	Date	Appr
-		RELEASED	4/1/05	
A		REDRAWN	8/26/11	
B		REVISED SPEC.	06/13/12	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

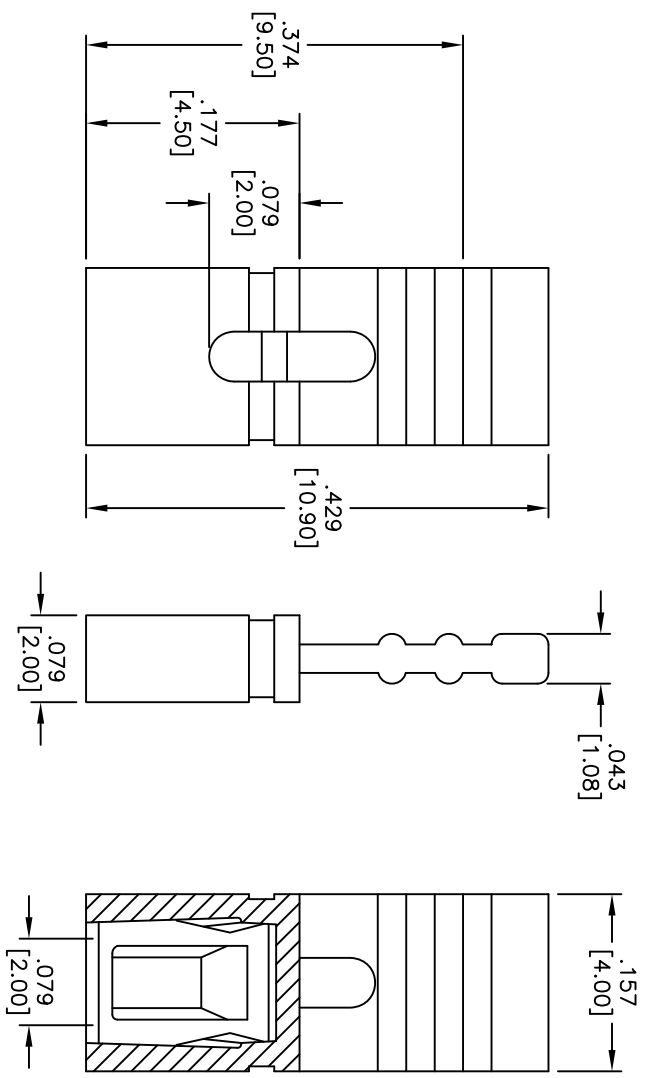

**SPECIFICATIONS:**

- Material: Insulator: Nylon 66, rated UL 94V-2
- Insulator color: Black
- Contacts: Phosphor Bronze
- Plating: G = Gold flash over Nickel underplate overall  
T = Tin over Copper underplate overall
- Electrical: Current rating: 3 Amp max  
Contact resistance: 30 mohms max  
Insulation resistance: 1000 Mohms min  
Dielectric withstanding voltage: 650 VAC for 1 minut
- Temperature Rating: Operating temperature: -55°C to +105°C
- Environmental: Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLES
.X ± .10	ØX ± .10
.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXX ± .010
APPROVALS	DATE
DRAWN SS	4/1/05
CHECKED	
APPROVED	

**ADAM TECH**  
 909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .079 [2.00] MINI SHUNT, HANDLE TOP  
 .429 [10.90] HEIGHT

SIZE: X PART NO.: MS2H-2-X  
 REF: S00078T SCALE: NTS SHEET 1 OF 1