





ISSUE NUMBER	
ORIGINAL	(1)

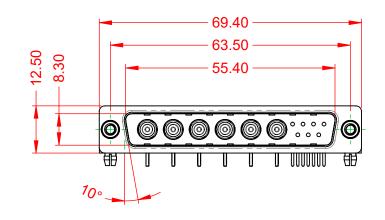




NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:

THERMOPLASTIC POLYESTER, UL94V-0 STEEL, NICKEL PLATED COPPER ALLOY, GOLD FLASH PLATED

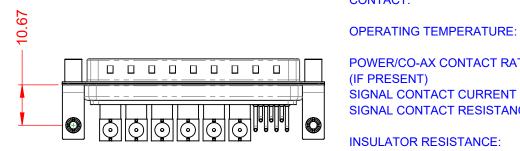

POWER/CO-AX CONTACT RATING:	75Ω (IMPEDA
(IF PRESENT)	
SIGNAL CONTACT CURRENT RATING:	5A PER CON
SIGNAL CONTACT RESISTANCE:	$10m\Omega$ MAX.
INSULATOR RESISTANCE:	5000MO min.


.XX ±0.13 .XXX ±0.05

DIELECTRIC WITHSTANDING VOLTAGE: ANCE)

-55°C ~ 125°C

NTACT

1000V AC rms



	SW REFERENCE NO.: 629 C	29 COMBO ASSEMBLY		
COMBINATION D-SUB		DRAWN: C.B	DATE: JAN. 01/20	19
			DATE:	
EDAC INC	RONTO, ONTARIO CANADA C	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	2
TORONTO, ONTARIO		DRAWING NUMBER: 629-13W	6240-7N5	ISSUE
YOUR CONNECTION TO QUALITY & SERVICE		PART NUMBER: 629-13W	6240-7N5	1



COMPLIANT

THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

