



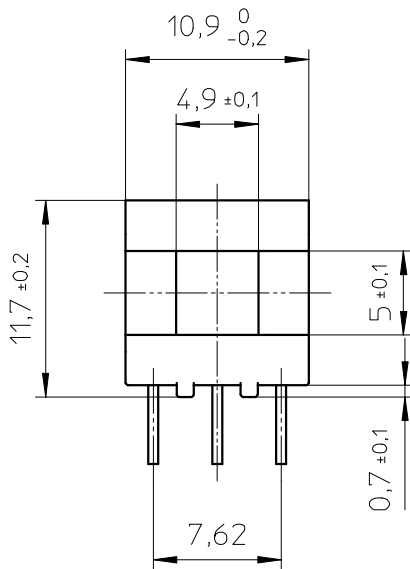




**FERROXCUBE**

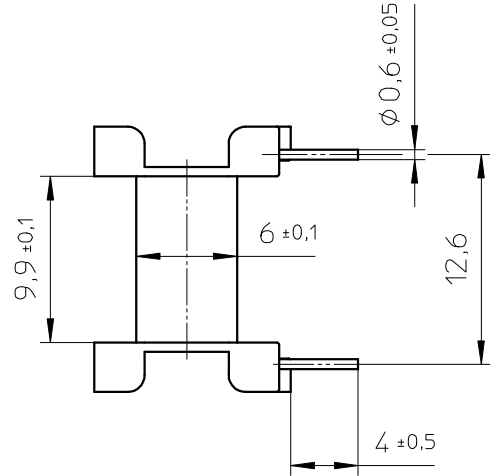

1 2 3 4

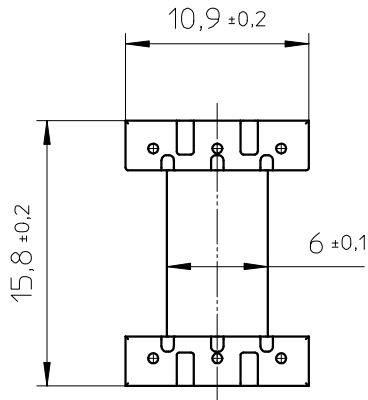

Hole pattern:

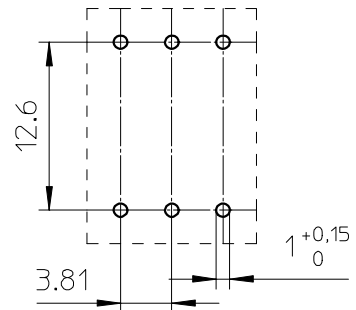

Coil former material: Sumikon PM-9820 (PF), glass-reinforced.  
 UL file number: E41429 - UL94V-0.  
 Pin material: Copper-clad steel, Sn plated.  
 Max. operating temp.: acc. to IEC 60 085 class H, 180°C.  
 Resistance to soldering heat: acc. to IEC 60 068-2-20 Part 2, Test Tb, method 1B, 350°C-3,5s  
 Solderability: acc. to IEC 60 068-2-20 Part 2, Test Ta, method 1, 235°C-2s  
 Min. winding area: 22.5 mm<sup>2</sup>  
 Mean length of turn: 33.9 mm.

CLASSNO.	CSH-E16/8/5-1S-6P-C		4322 021 04071	2002-03-28
				2003-08-13
				2003-08-13
				2005-03-11
NAME NAAM	Tjon	SUPERS. VERV.	1 SH BL.	SH BL.
MPA	CHECK CONTR.	DAT.	02-03-28	Property of Eigendom van
				© FERROXCUBE 2000
				112 - 001 010
				A4