

6

5


4

3

2

1

MATERIAL NUMBER	ENGINEERING NUMBER	FINISHED LENGTH
1200980204	MM3G60PP4M010	1.0M +55.6mm -0 [3.28' +2.19" -0]
1200980205	MM3G60PP4M050	5.0M +165.1mm -0 [16.40' +6.50" -0]

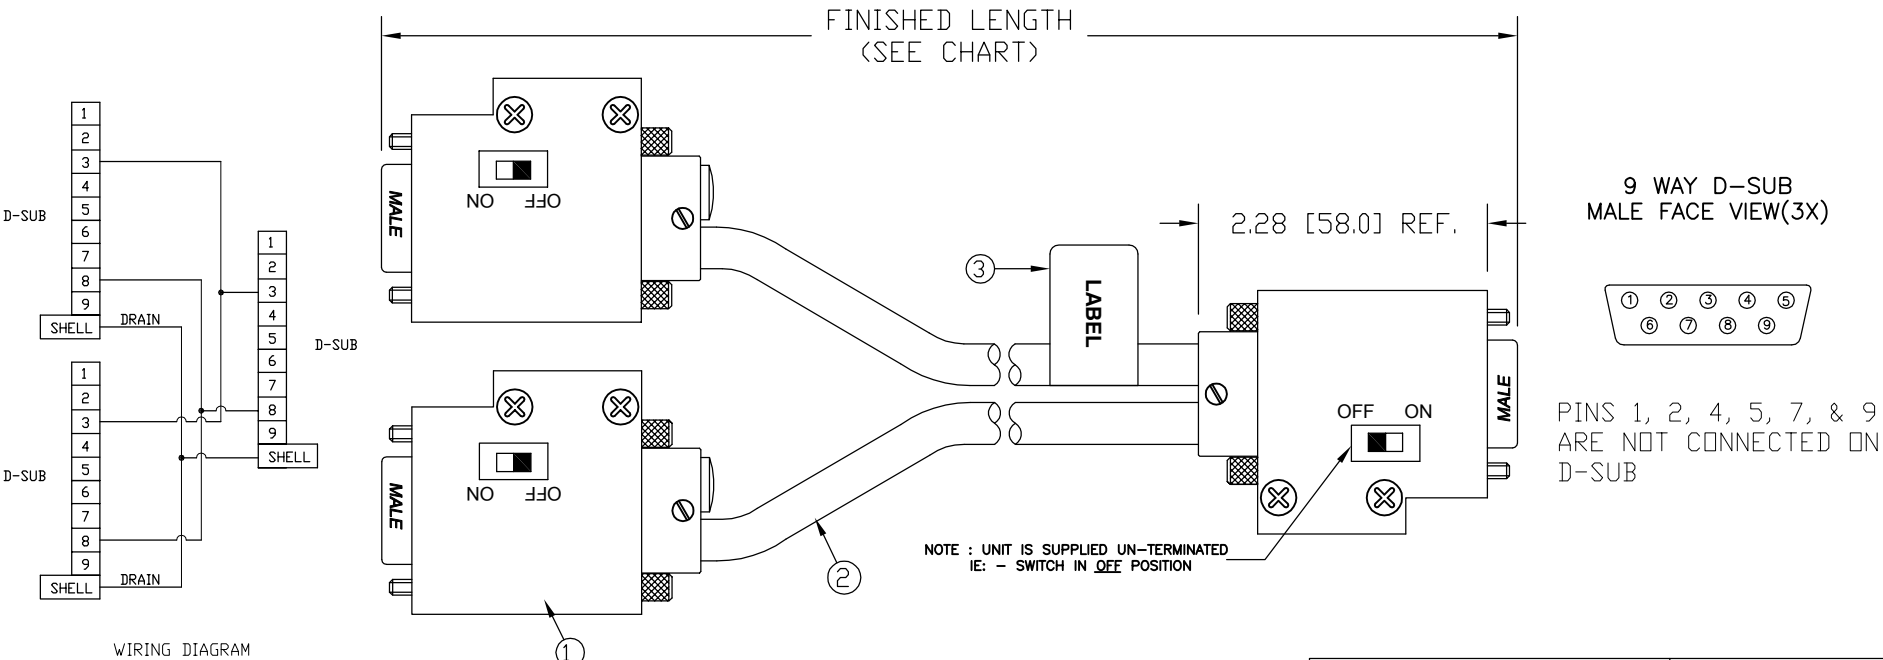

WIRING DIAGRAM

NOTE : UNIT IS SUPPLIED UN-TERMINATED
IE: - SWITCH IN OFF POSITION

VOLTAGE RATING	250 VAC/VDC
AMPERAGE RATING	4 AMPS
PROTECTION FOR D-SUB	IP40
OPERATING TEMPERATURE - D-SUB	0°C TO 60°C

ITEM	COMPONENT	MATERIAL	FINISH
1	D-SUB	ABS	BLACK
2	CABLE- 22 AWG, COPPER STRANDING, TWISTED PAIR, SHIELD WITH BRAID	PUR	PURPLE
3	LABEL	MLYAR	BLACK/YELLOW

RELEASED DRAWING
 EC NO: MEL2010-0081
 DRWN: LHARTMAN 8/27/09
 CHKD: BWOODMAN 09/08/27
 APPR: JFMURPHY 2009/08/28

QUALITY SYMBOLS
 ▽=0
 ∇=0

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	±---	±---
3 PLACES	±---	±---
2 PLACES	±---	±.01
1 PLACE	±0.3	±---

ANGULAR ±---°

**DRAFT WHERE APPLICABLE
MUST REMAIN
WITHIN DIMENSIONS**

DIMENSION STYLE IN/MM

DRAWN BY DATE
LHARTMAN 2009/08/27

CHECKED BY DATE
BWOODMAN 2009/08/27

APPROVED BY DATE
JFMURPHY 2009/08/27

MATERIAL NO.

SIZE **A**

SCALE NTS

DESIGN UNITS INCH

THIRD ANGLE PROJECTION

TITLE
**D-SUB PROFIBUS HORIZ
TO D-SUB(2) HORIZ
#22/2 SHLD PURPLE PUR**

MOLEX INCORPORATED

DOCUMENT NO. **SD-120098-019**

SHEET NO. **1 OF 1**

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

6

5

4

3

2

1