



THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - TE Connectivity Ltd. ALL RIGHTS RESERVED.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
E1		REV PER ECR 06-005716 & 005726	15MAR06	JR	MS
E2		REVISED PER ECO-17-008808	01FEB2018	RS	DR

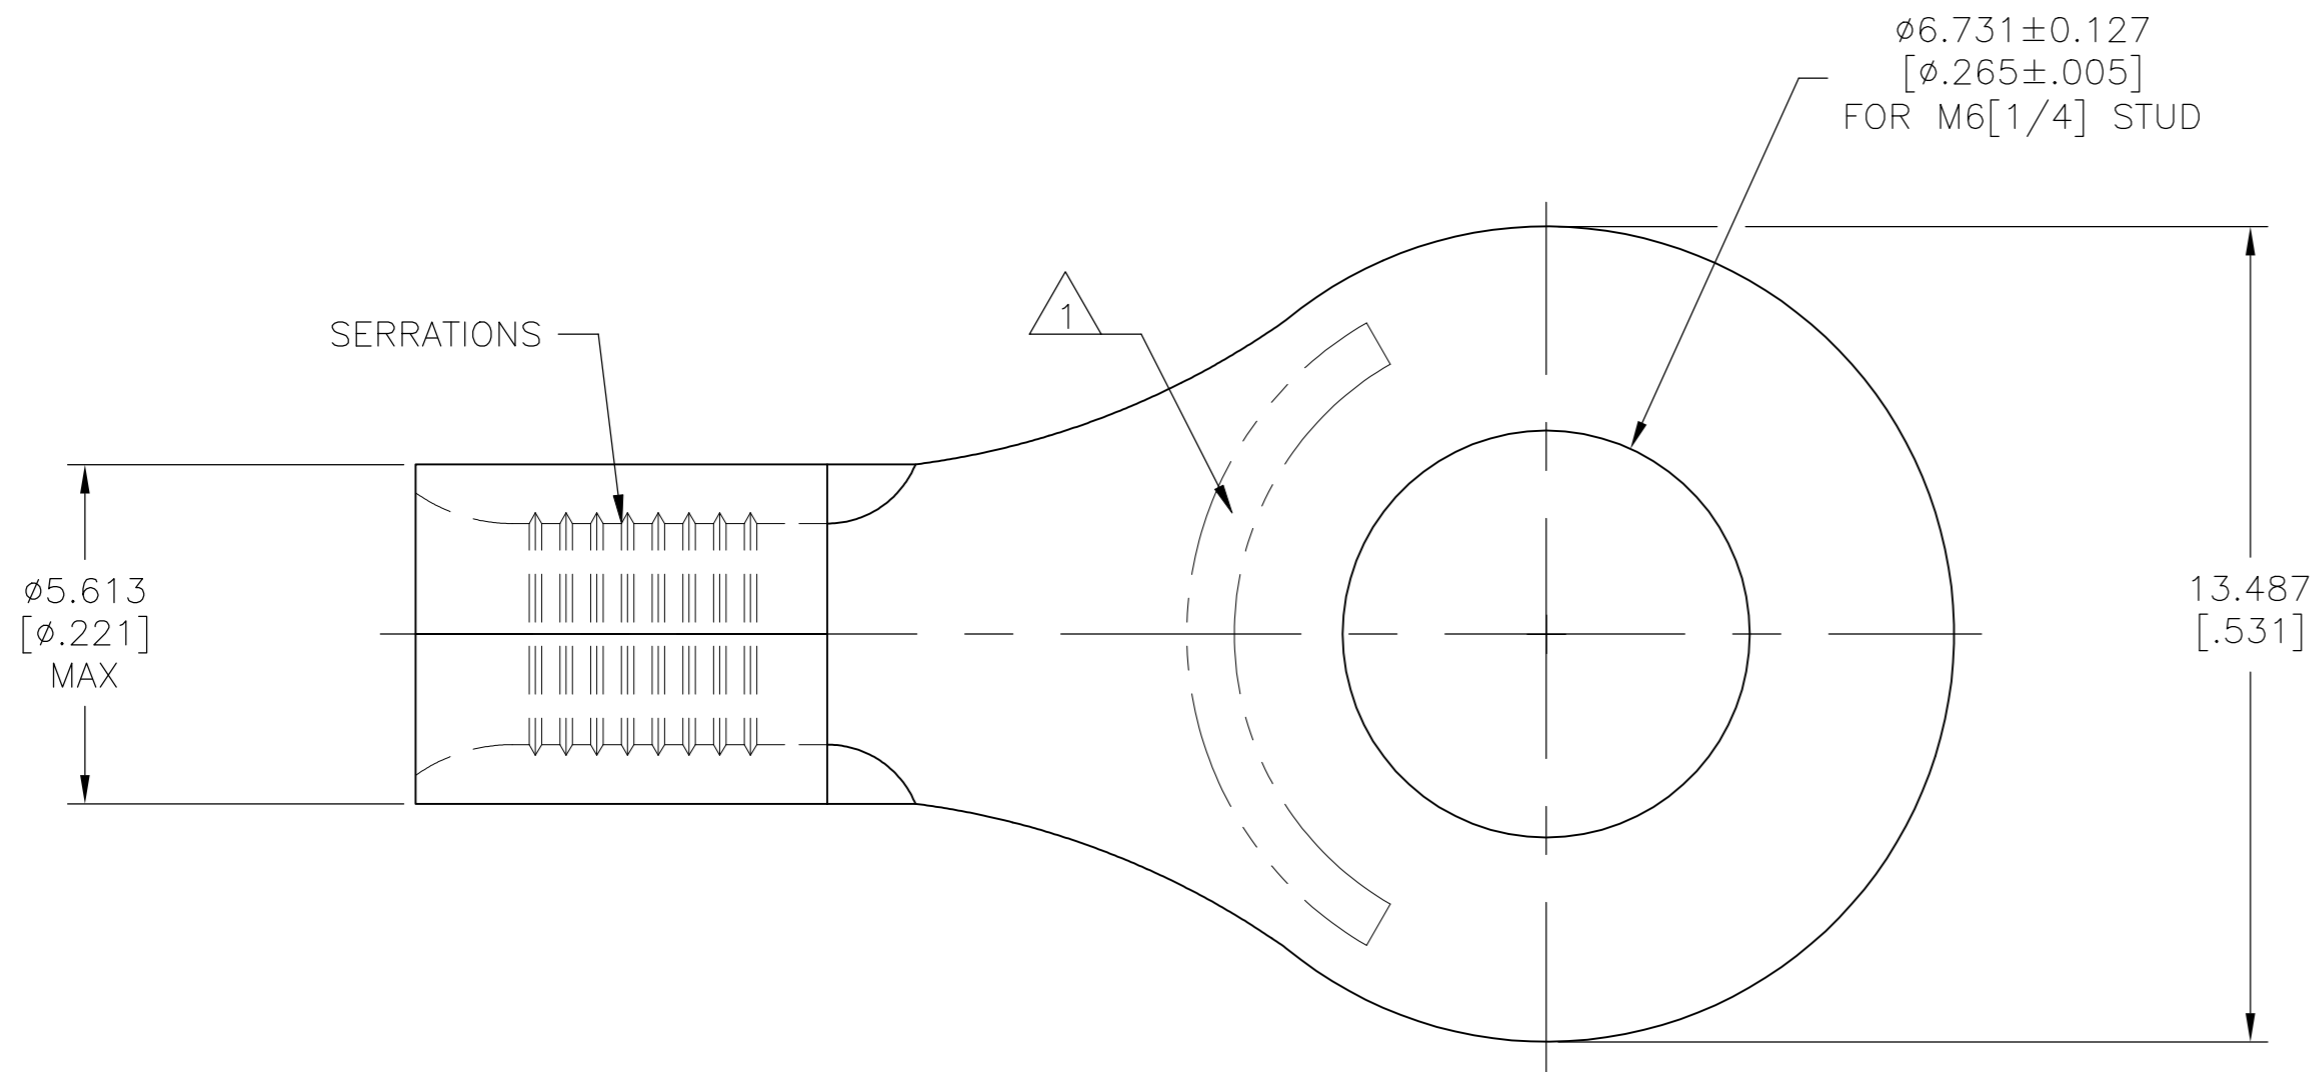

- △1 STAMP AMP 12-10* APPROX AS SHOWN
- △2 COPPER PER ASTM B-152, ANNEALED
- △3 0.00254 [.000100] MIN TIN PER ASTM B-545
- 4 MAX OPERATING TEMP 170°C[338°F] MAX
- 5 WIRE CROSS SECTION AREA RANGE: 2.62-6.64mm² [5,180-13,100] CIR MILS

AMP WIRE RANGE	Listed FILE E13288	LR7189 Certified
12-10 AWG STRANDED	12-10 AWG STRANDED	NOT CERTIFIED

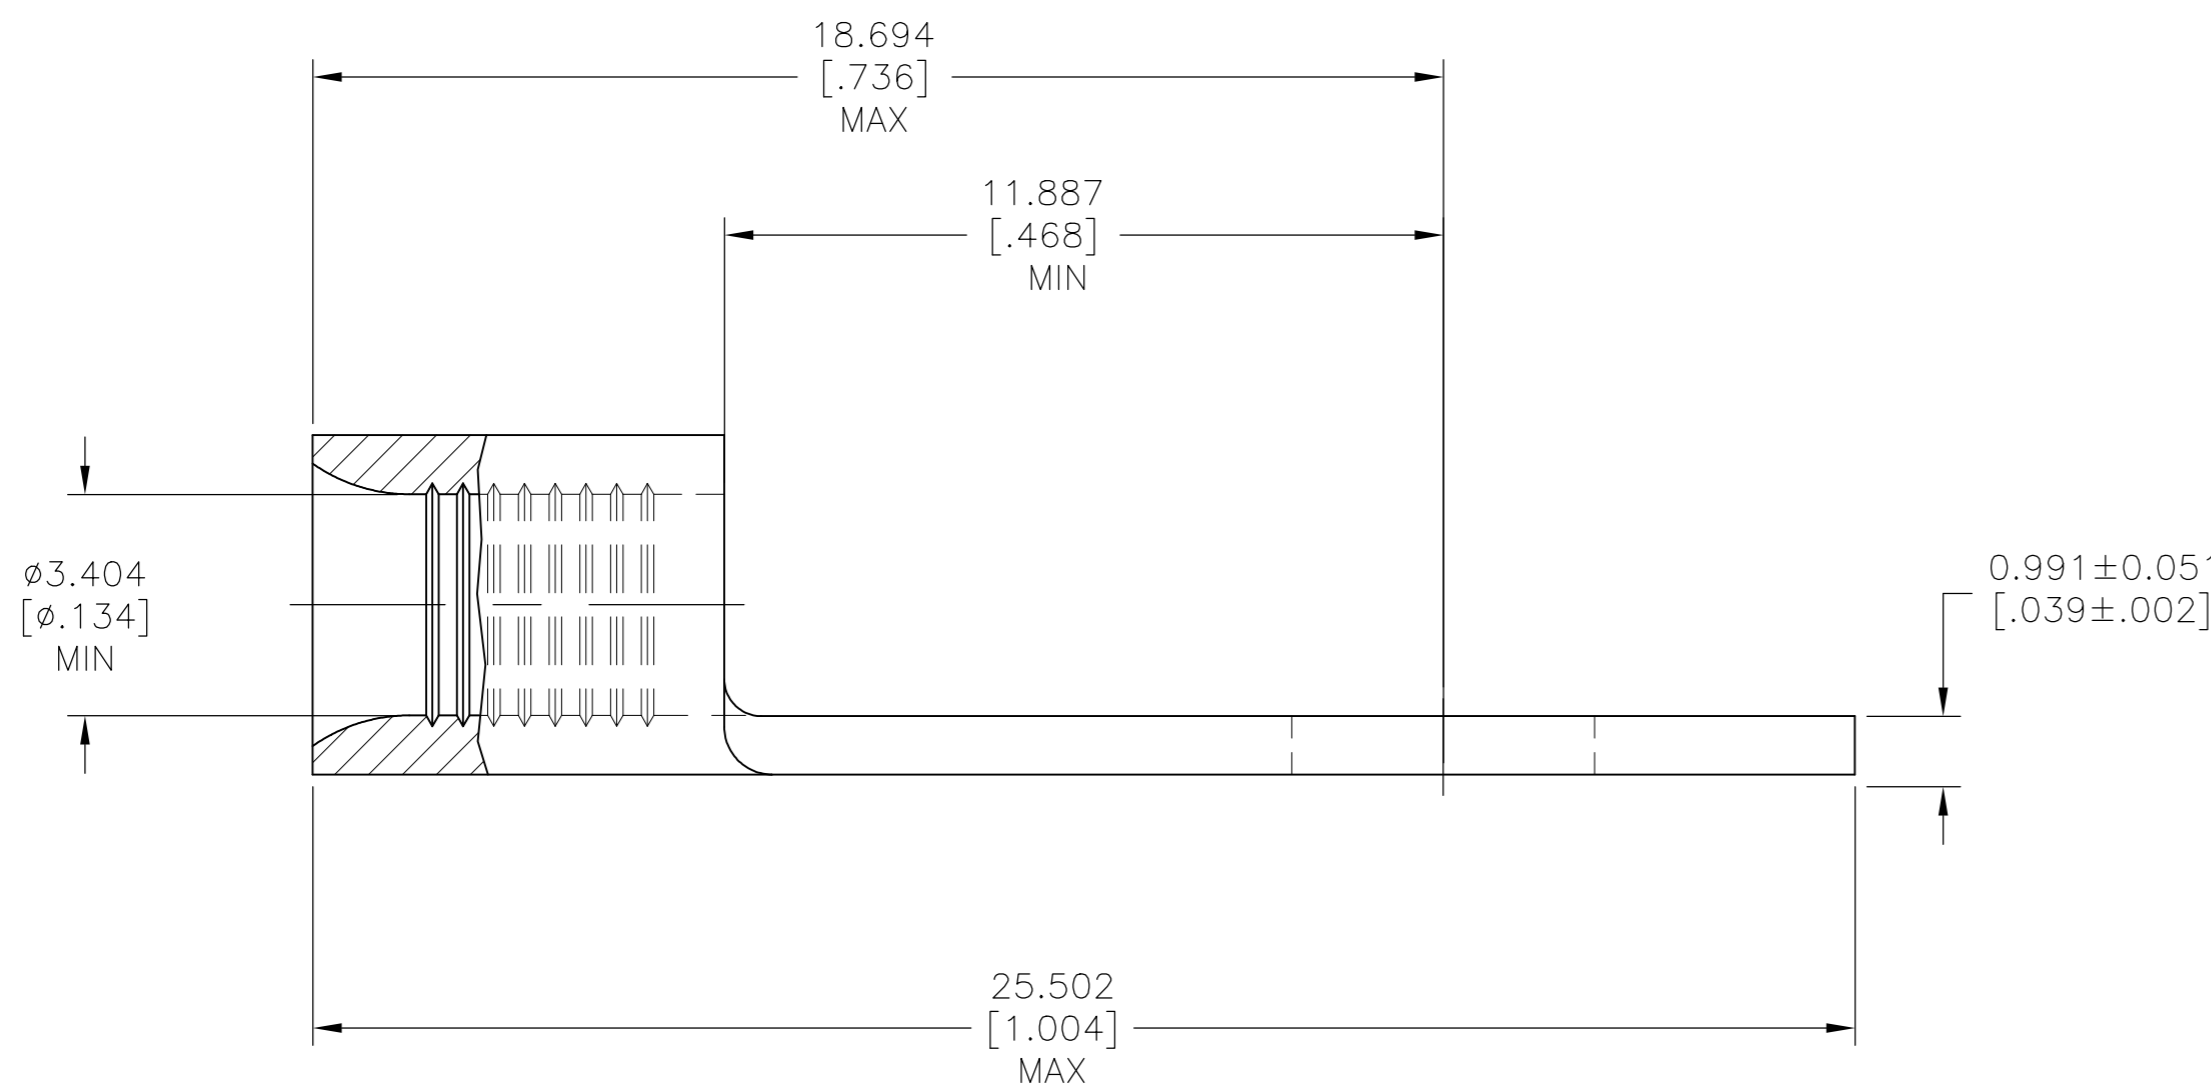

500	LOOSE PIECE	31122
QTY	PACKAGE TYPE	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN TA BRINKMAN 2-9-93	TE Connectivity Ltd.	
DIMENSIONS: mm [INCHES]		CHK DA PATTERSON 2-9-93		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD JL MECKLEY 2-9-93	NAME TERMINAL, RING TONGUE, BUDGET 12-10 AWG	
0 PLC ± -	1 PLC ± -	PRODUCT SPEC UL 486 A-B	SIZE A2	CAGE CODE 00779
2 PLC ± -	3 PLC ± 0.127[.005]	APPLICATION SPEC	DRAWING NO C=31122	RESTRICTED TO -
4 PLC ± -	ANGLES ± -	MATERIAL △2	WEIGHT	SCALE 8:1
FINISH △3		CUSTOMER DRAWING		SHEET 1 of 1
				REV E2

31122

A