







ELECTRICAL SPECIFICATIONS:
 Inlet Current rating: 10 A **UL**
 Fuse Holder Current rating: 5A **UL**
 Voltage rating: 250 VAC
 Insulation resistance: 100 Mohm min.
 at 500 VDC
 Dielectric withstanding voltage: 2000
 VAC for one minute

**RoHS
 COMPLIANT**

ORDERING CODE:

42R42-3 $\frac{2}{1}$ $\frac{2}{2}$ $\frac{-}{3}$


- 1) COLOR
 1 = BLACK
 2 = GRAY
- 2) ELECTRICAL CIRCUIT
 CONFIGURATION

- 1 = 10A 250V 70°C
 2+GROUND, 1 FUSE 
- 2 = 10A 250V 70°C
 2+GROUND, 2 FUSE 
- 3 = 10A 250V 120°C
 2+GROUND, 1 FUSE 
- 4 = 10A 250V 120°C
 2+GROUND, 2 FUSE 
- 5 = 10A 250V 70°C
 2 POLE, 1 FUSE 
- 6 = 10A 250V 70°C
 2 POLE, 2 FUSE 





3) PANEL THICKNESS

P/N	A	MAX. PANEL THICKNESS
42R42-3X2X-150	1.5	1.5
42R42-3X2X-200	2.0	2.0
42R42-3X2X-250	2.5	2.5

ADDITIONAL PANEL THICKNESS
 AVAILABLE ON REQUEST

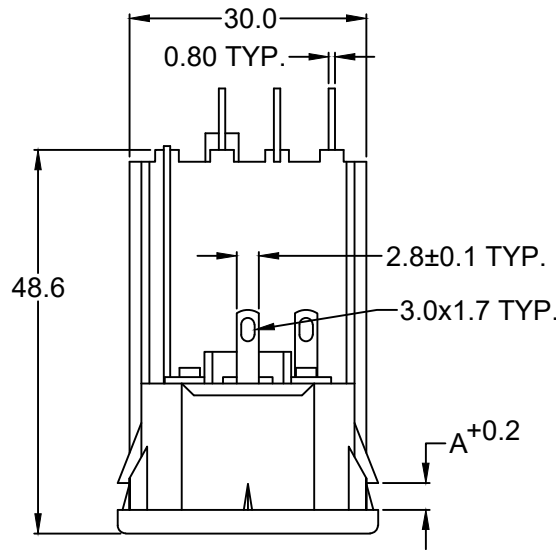

**RECOMMENDED
 PANEL CUTOUT**

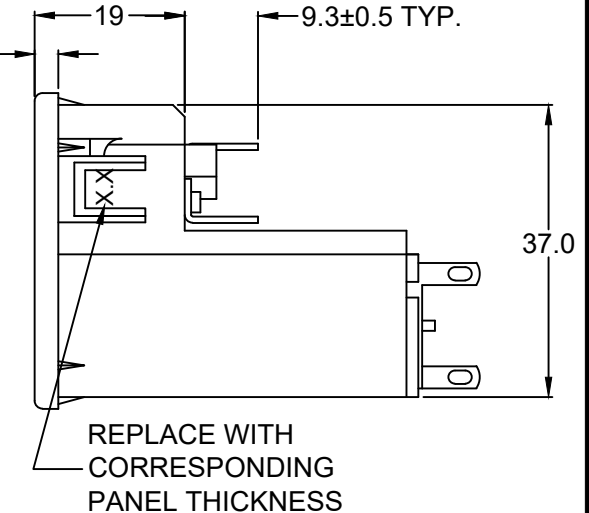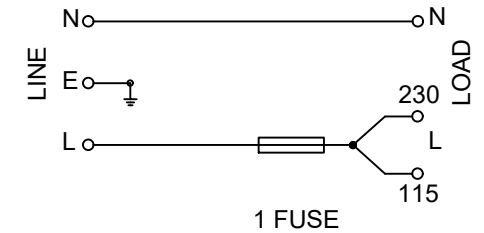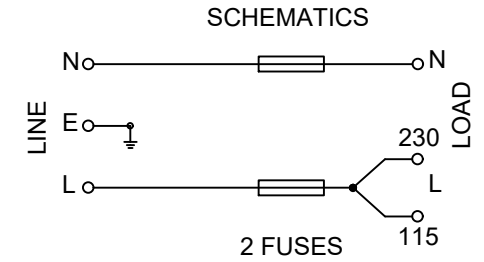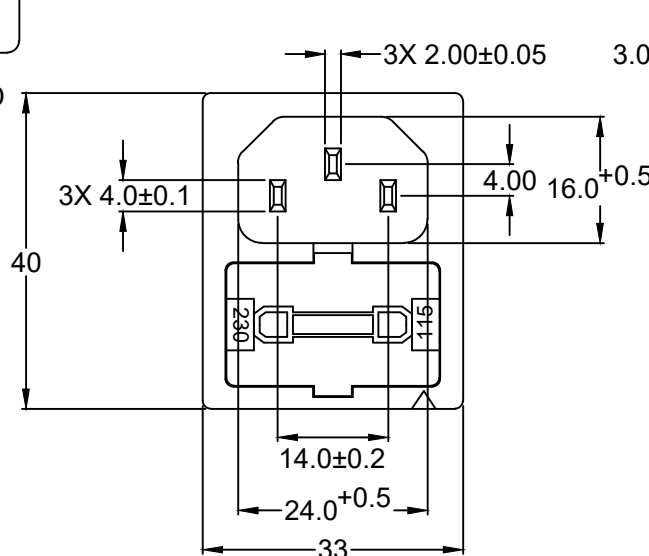

REVISIONS		CHANGE	CHK	CHK	APPR
REV	DATE	1/10/22	A		

TOLERANCE UNLESS OTHERWISE SPECIFIED	
X	± 1
X.X	± 0.4
X.XX	± 0.20

DRAWN BY	GQ	DATE:	09/28/01
CHECK BY	TD	DATE:	10/04/01
APPR BY	PB	DATE:	10/04/01

Power Dynamics, Inc.
 Phone: 973 560-0019 Whippany, New Jersey Fax: 973 560-0076

PART: IEC 60320 APPL. INLET, VOLTAGE SELECTOR
 FUSE HOLDER; SOLDER TERMINALS; SNAP-IN

42R42-3X2X-XXX

SCALE: A
 NTS

ALL DIMENSIONS FOR REFERENCE ONLY
 DIMENSIONS ARE IN MILLIMETERS

SHEET 1 of 1
 REV: A