


**MULTILAYER CERAMIC ANTENNA  
FOR GSM/DCS (900/1800MHz)**

**Product Specification<sup>1</sup> (Preliminary)**

**QUICK REFERENCE DATA**

Frequency Range	880-960 MHz	
	1710-1880 MHz	
Bandwidth	30 MHz	
	170 MHz	
(Dependant on ground plane size and tuning circuit of customer)		
Peak Gain	900MHz	0.5~1 dBi
	1800MHz	0.5~1 dBi
(Dependant on ground plane size and tuning circuit of customer)		
VSWR		2.7
(Dependant on ground plane size and tuning circuit of customer)		
Polarization		Linear
Impedance		50Ω
Operating Temperature		-55~125 °C
Size		21*12*0.9 mm




*Special Environmental Concerns- Green Products Design: The foil making process is using environmentally-friendly aqueous solvent technology. Termination is lead free (Pb free) and packing materials can be re-cycled*

<sup>1</sup> All the technical data and information contained herein are subject to change without prior notice

HF R&D	Print date 02/10/16	Preliminary internal use only			
					Oct. 6, 01
	<b>Multilayer Ceramic Antenna for GSM/DCS (900/1800MHz)</b>	<b>4313 118 00918</b>			Oct. 14, 02
		<b>AN0918000721121B</b>			
Grant Lin/Cliff		Oct. 14, 02	Page 1	sheet 190-1	A4
spec.doc	Phycomp Taiwan Ltd.				

## APPLICATION

### Suggested Layout

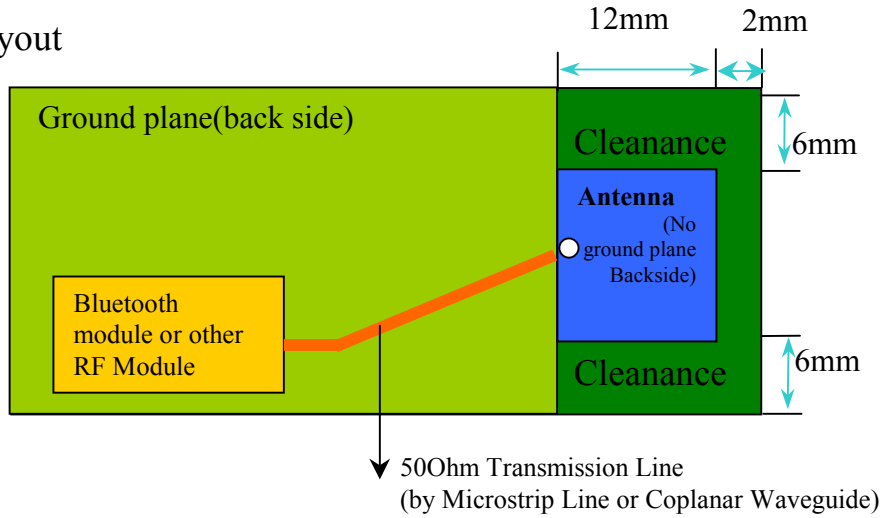

## DIMENSIONAL DATA


Figure	Dimension	Port
	<p>W 20.5 ± 0.25 mm</p> <p>L 11.8 ± 0.2 mm</p> <p>T 0.90 ± 0.2 mm</p> <p>F 2.85 ± 0.35 mm</p> <p>C 1.55 ± 0.55 mm</p> <p>S 2.85 ± 0.35 mm</p> <p>S1 2.65 ± 0.65 mm</p>	

HF R&D	Print date 02/10/16	Preliminary internal use only			
				Oct. 6, 01	
	<b>Multilayer Ceramic Antenna for GSM/DCS (900/1800MHz)</b>		<b>4313 118 00918 AN0918000721121B</b>	Oct. 14, 02	
Grant Lin/Cliff		Oct. 14, 02	Page 2	sheet 190-2	A4
spec.doc	Phycomp Taiwan Ltd.				

## SOLDER LAND PATTERN

Figure	Dimensions	Remark
	L $13 \pm 0.10 \text{ mm}$ F $1.40 \pm 0.10 \text{ mm}$ C $0.90 \pm 0.10 \text{ mm}$ S $1.40 \pm 0.10 \text{ mm}$	Feed Pad   NC Mount Pad

## Typical Radiation Pattern Polar Plot (Based on Suggested Layout)

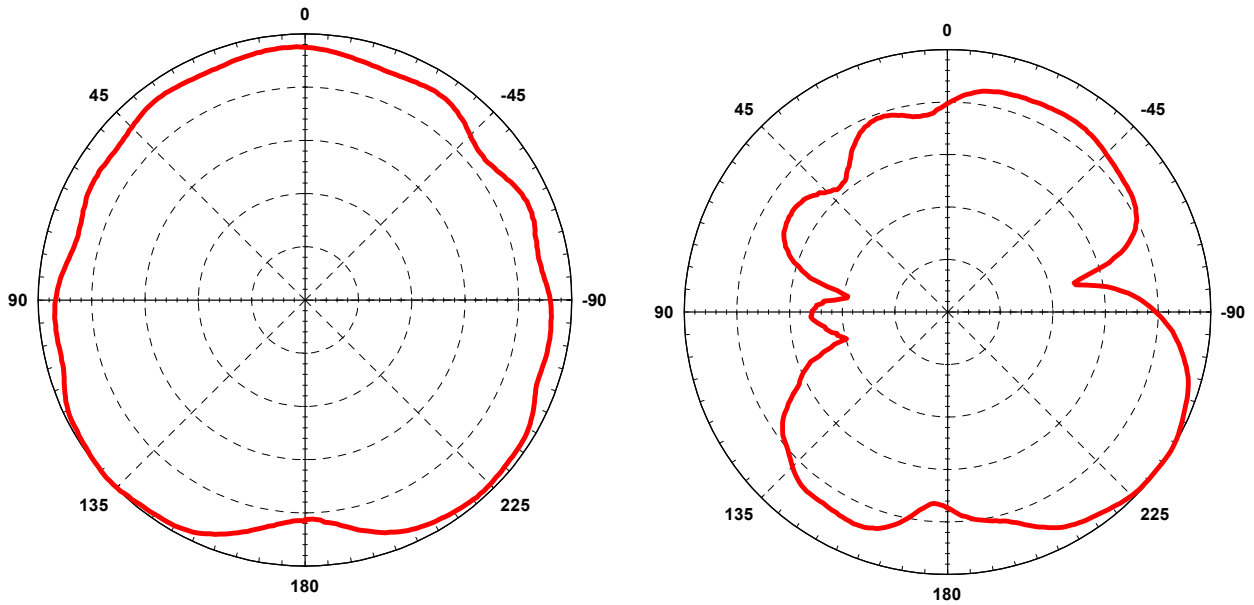


**H-Plane**


**E-Plane**

HF R&D	Print date 02/10/16	Preliminary internal use only			
	Multilayer Ceramic Antenna for GSM/DCS (900/1800MHz)	4313 118 00918		Oct. 6, 01	
		AN0918000721121B		Oct. 14, 02	
Grant Lin/Cliff		Oct. 14, 02	Page 3	sheet 190-3	A4
spec.doc	Phycomp Taiwan Ltd.				

## STANDARD TEST BOARD FOR SWR

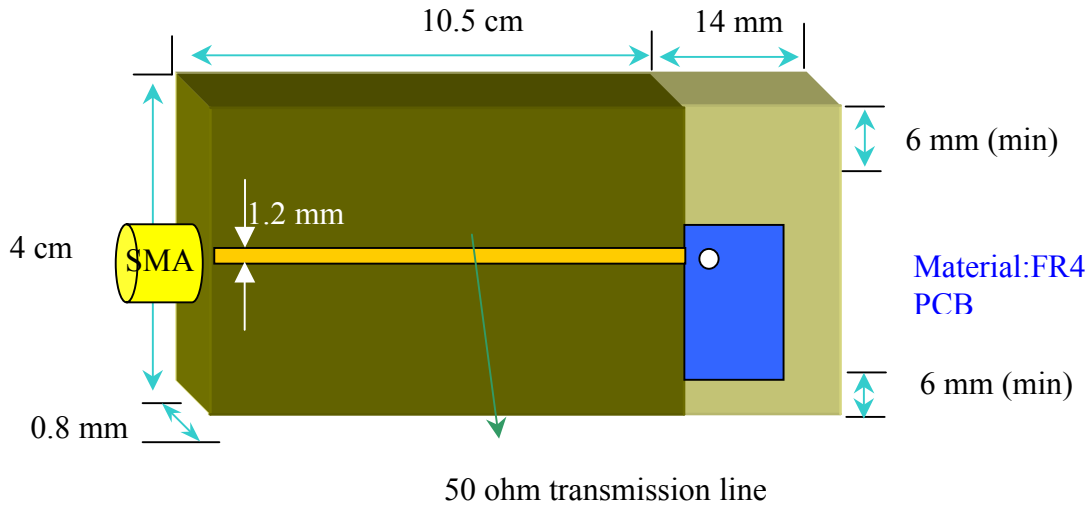

(Pre-Tuning Reference Only, after-tuning performance is depending on customer installation)

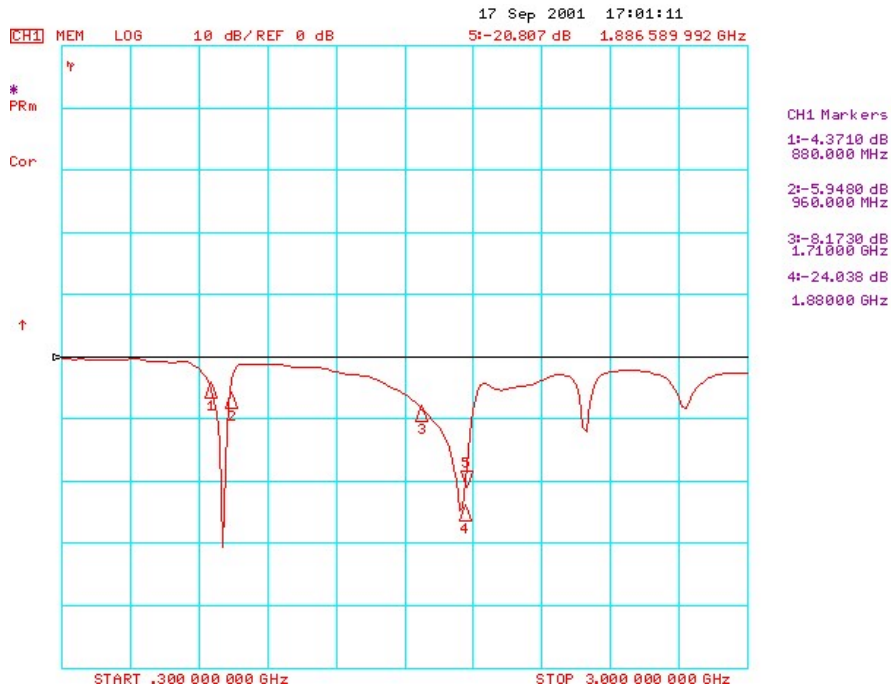

HF R&D	Print date 02/10/16	Preliminary internal use only			
	Multilayer Ceramic Antenna for GSM/DCS (900/1800MHz)	4313 118 00918		Oct. 6, 01	
		AN0918000721121B		Oct. 14, 02	
Grant Lin/Cliff		Oct. 14, 02	Page 4	sheet 190-4	A4
spec.doc	Phycomp Taiwan Ltd.				

**RELIABILITY DATA (Reference to IEC Specification)**

<b>IEC 384-10/ CECC 32 100 CLAUSE</b>	<b>IEC 60068-2 TEST METHOD</b>	<b>TEST</b>	<b>PROCEDURE</b>	<b>REQUIREMENTS</b>
4.4		Mounting	The antenna can be mounted on printed-circuit boards or ceramic substrates by applying wave soldering, reflow soldering (including vapour phase soldering) or conductive adhesive	No visible damage
4.5		Visual inspection and dimension check	Any applicable method using × 10 magnification	In accordance with specification (chip off 4mm)
4.6.1		Antenna	Frequency = 900M/1800MHz; at 20 °C	Standard test board in page 4
4.8		Adhesion	A force of 3 N applied for 10 s to the line joining the terminations and in a plane parallel to the substrate	No visible damage
4.9		Bond strength of plating on end face	Mounted in accordance with CECC 32 100, paragraph 4.4	No visible damage
			Conditions: bending 0.25 mm at a rate of 1mm/s, radius jig. 340 mm, 2mm warp on FR4 board of 90 mm length	No visible damage

HF R&D	Print date 02/10/16	Preliminary internal use only			
	<b>Multilayer Ceramic Antenna for GSM/DCS (900/1800MHz)</b>	<b>4313 118 00918 AN0918000721121B</b>		Oct. 6, 01	
				Oct. 14, 02	
Grant Lin/Cliff		Oct. 14, 02	Page 5	sheet 190-5	A4
spec.doc	Phycomp Taiwan Ltd.				

IEC 384-10/ CECC 32 100 CLAUSE	IEC 60068-2 TEST METHOD	TEST	PROCEDURE	REQUIREMENTS
4.10	20(Tb)	Resistance to soldering heat	260 ± 5 °C for 10 ± 0.5 s in a static solder bath	The terminations shall be well tinned after recovery and Central Freq. Change ± 6%
		Resistance to leaching	260 ± 5 °C for 30 ± 1 s in a static solder bath	Using visual enlargement of × 10, dissolution of the termination shall not exceed 10%
4.11	20(Ta)	Solderability	Zero hour test, and test after storage (20 to 24 months) in original atmosphere; un-mounted chips completely immersed for 2 ± 0.5 s in 235 ± 5°C.	The termination must be well tinned, at least 75% is well tinned at termination
4.12	4(Na)	Rapid change of temperature	-55 °C (30 minutes) to +125 °C (30 minutes); 5 cycles	No visible damage Central Freq. Change ± 6%
4.14	3(Ca)	Damp heat	500 ± 12 hours at 60 °C; 90 to 95 % RH	No visible damage 2 hours recovery Central Freq. Change ± 6%
4.15		Endurance	500 ± 12 hours at 125 °C;	No visible damage 2 hours recovery Central Freq. Change ± 6%

HF R&D	Print date 02/10/16		Preliminary internal use only		
	Multilayer Ceramic Antenna for GSM/DCS (900/1800MHz)		4313 118 00918 AN0918000721121B		Oct. 6, 01
					Oct. 14, 02
Grant Lin/Cliff		Oct. 14, 02	Page 6	sheet 190-6	A4
spec.doc	Phycomp Taiwan Ltd.				

**ORDERING INFORMATION: Method I- by 12NC Ordering Code**

The antennas may be ordered by using the 12 NC ordering code. These code numbers can be determined by the following rules:

- 4313 1 18 00 918  
F C M S T A
- F. Family Code  
43 = Antenna
  - C. Packing Type Code  
13 =Bulk (1000 pcs)
  - M. Materials Code  
1 = High Frequency Material
  - S. Size Code  
18 = 21 \*12 \* 0.9 mm
  - T. Tolerance  
00 = 80 M Hz GSM 900 Band Width  
170 M Hz DCS1800 Band Width
  - A. Working Frequency  
918 = GSM 900 880-960 MHz  
DCS 1800 1710-1880 MHz

**Example: 12NC 4313 118 00918**  
 Product description: Antenna (43) by bulk (13) of High Frequency Material (1), Size 21\*12\*0.9 mm (18);  
 Tolerance (00) of 80 & 170 MHz (VSWR<2.7)  
 Working Frequency (918) = GSM 900 & DCS1800

**ORDERING INFORMATION: Method II- by Clear Text Code**

The antennas may be ordered by using the 16-digit clear text ordering code. These code numbers can be determined by the following rules:

<b>AN0918000721121B (Clear Text Code Example)</b>						
AN	0918	00	07	2112	1	B
Product	Central Freq.	Bandwidth	Material	Size	Quantities	Packing
AN= Antenna	900/1800MHz	GSM/DCS	07=K7	2112=21*12mm*0.9mm	1 = 1K	B = Bulk

HF R&D	Print date 02/10/16	Preliminary internal use only			
	<b>Multilayer Ceramic Antenna for GSM/DCS (900/1800MHz)</b>	<b>4313 118 00918 AN0918000721121B</b>			Oct. 6, 01
					Oct. 14, 02
Grant Lin/Cliff		Oct. 14, 02	Page 7	sheet 190-7	A4
spec.doc	Phycomp Taiwan Ltd.				

**Revision Control:**

Revision	Date	Content	Remark
	Oct. 6, 01	New Issued	
	Oct. 14, 2002	Modify dimension and termination width (S1, F, C, S2)	

HF R&D	Print date 02/10/16	Preliminary internal use only					
	<b>Multilayer Ceramic Antenna for GSM/DCS (900/1800MHz)</b>	<b>4313 118 00918 AN0918000721121B</b>				Oct. 6, 01	
						Oct. 14, 02	
Grant Lin/Cliff		Oct. 14, 02		Page 8	sheet 190-8	A4	
spec.doc	Phycomp Taiwan Ltd.						