



THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.



**ISSUE NUMBER** ORIGINAL (1)

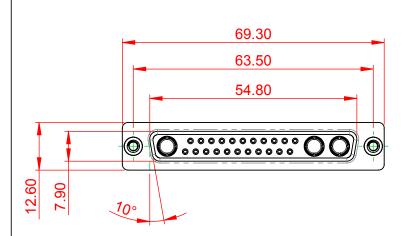



NOTES:


MATERIAL:

HOUSING: THERMOPLASTIC POLYESTER, UL94V-0 SHELL: STEEL, Sn or Ni PLATED CONTACT: COPPER ALLOY SEE ORDERING GUIDE FOR PLATING

OPERATING TEMPERATURE: -55°C ~ 125°C


SIGNAL CONTACT CURRENT RATING: 5A PER CONTACT SIGNAL CONTACT RESISTANCE: 10mQ MAX. INSULATOR RESISTANCE: 5000MΩ min. DIELECTRIC WITHSTANDING VOLTAGE: 1000V AC rms

		SW REFERENCE NO.: 628 COMBO ASSEMBLY			
			DRAWN: C.B	DATE: JAN. 01/20	19
			CHECKED:	DATE:	
	EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	4
	EDAC INC TORONTO, ONTARIO CANADA	SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWING NUMBER: 628-25W3624-2TB		ISSUE
	YOUR CONNECTION TO QUALITY & SERVICE		PART NUMBER: 628-25W	3624-2TB	1





THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

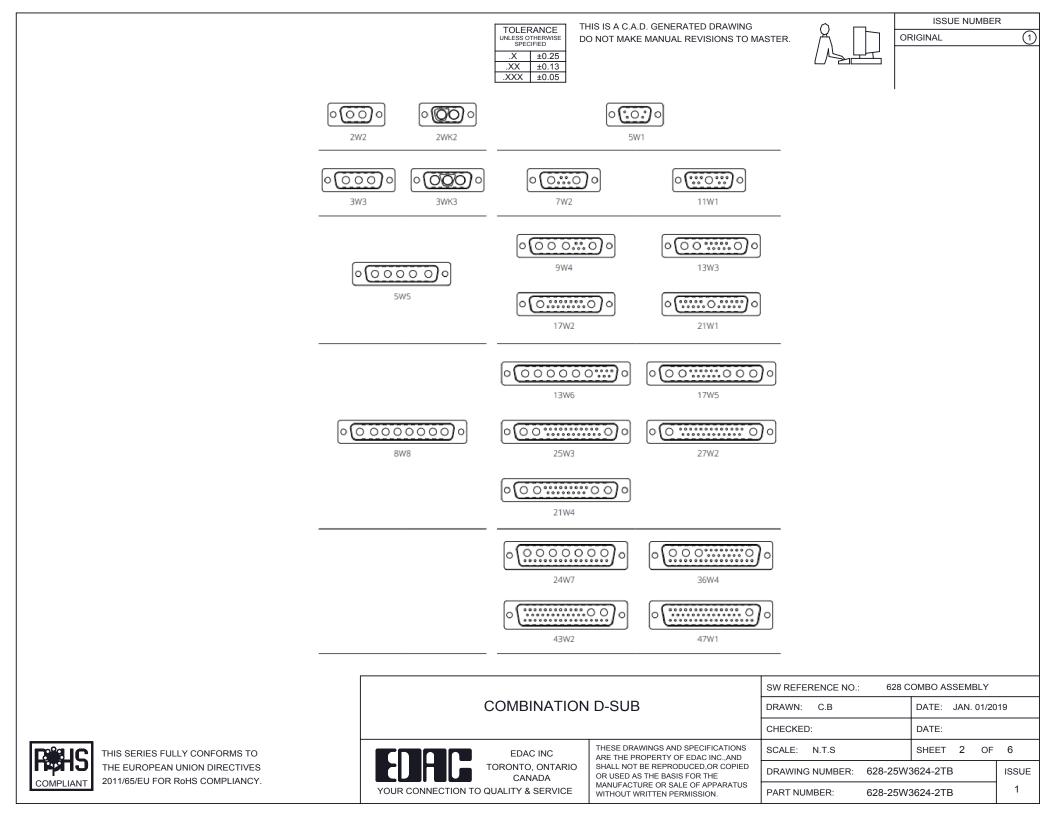

THIS IS A C.A.D. GENERATED DRAWING TOLERANCE UNLESS OTHERWISE SPECIFIED DO NOT MAKE MANUAL REVISIONS TO MASTER. .X ±0.25 .XX ±0.13 .XXX ±0.05



 $\overline{(1)}$ 

2W2 / 2WK2

3W3 / 3WK3

5W1 Male/Female

7W2 Male/Female






21W4 Male/Female



27W2 Male/Female




21W1 Male/Female



	SW REFERENCE NO.: 628 COMBO ASSEMBLY			
COMBINATION	DRAWN: C.B	DATE: JAN. 01/20	19	
	CHECKED:	DATE:		
EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INCAND	SCALE: N.T.S	SHEET 3 OF	4
TORONTO, ONTARIO CANADA	SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWING NUMBER: 628-25W	3624-2TB	ISSUE
YOUR CONNECTION TO QUALITY & SERVICE		PART NUMBER: 628-25W	3624-2TB	1

5W5 Male

5W5 Female



47.00

23.53


8W8 Male

8W8 Female


31.76

22.83





11W1 Male/Female




17W2 Male/Female

CURRENT RATING / ØA 10A / 2.2 20A / 3.3 30A / 3.7 40A / 4.2



COMPLIANT



 TOLERANCE
 THIS IS A C.A.D. GENERATED DRAWING


 UNLESS OTHERWISE
 DO NOT MAKE MANUAL REVISIONS TO MASTER.

 .X
 ±0.25






9W4 Male




25W3 Male









36W4 Female



13W3 Male



36W4 Male








13W6 Male



43W2 Male






17W5 Female

.XX ±0.13 .XXX ±0.05

9W4 Female

13W3 Female







47W1 Female




17W5 Male



47W1 Male







	COMBINATION D-SUB		SW REFERENCE NO.: 628 COMBO ASSEMBLY		
			DRAWN: C.B	DATE: JAN. 01/201	19
			CHECKED:	DATE:	
NFORMS TO	EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INCAND	SCALE: N.T.S	SHEET 4 OF	4
DIRECTIVES OMPLIANCY.	TORONTO, ONTARIO CANADA	SHALL NOT BE REPRODUCED OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWING NUMBER: 628-25W	/3624-2TB	ISSUE
	YOUR CONNECTION TO QUALITY & SERVICE		PART NUMBER: 628-25W	/3624-2TB	1



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY