


Click to
ORDER
samples

AM2SS-JZ

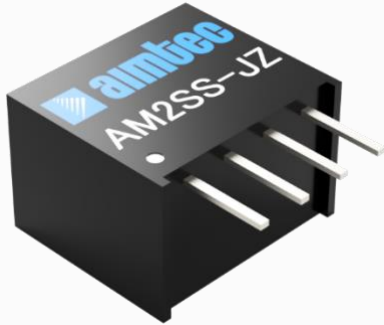

SIP4 Package

The AM2SS-JZ is a 2W SIP4 DC/DC converter that offers great cost savings thanks to an improved manufacturing process. It also features excellent reliability and performance while offering a standard input voltage range of 5VDC as well as an output voltage of 5-24V. This compact SIP4 design will surely benefit your new system design.


This new series offers great operating temperatures, from -40 to 85°C with full power up to 71°C. Also, an isolation of 1500VDC for improved reliability and system safety as well as a great 3,500,000h MTBF come standard.

The AM2SS-JZ is perfect for instrumentation, industrial controls, industrial applications, communication and IoT applications.

Features

- High I/O Isolation of 1500VDC
- Continuous Short circuit protection
- Operating Temp: -40 °C to +85 °C
- Industry standard SIP4 pin-out
- Efficiency up to 84%
- Unregulated output

Summary

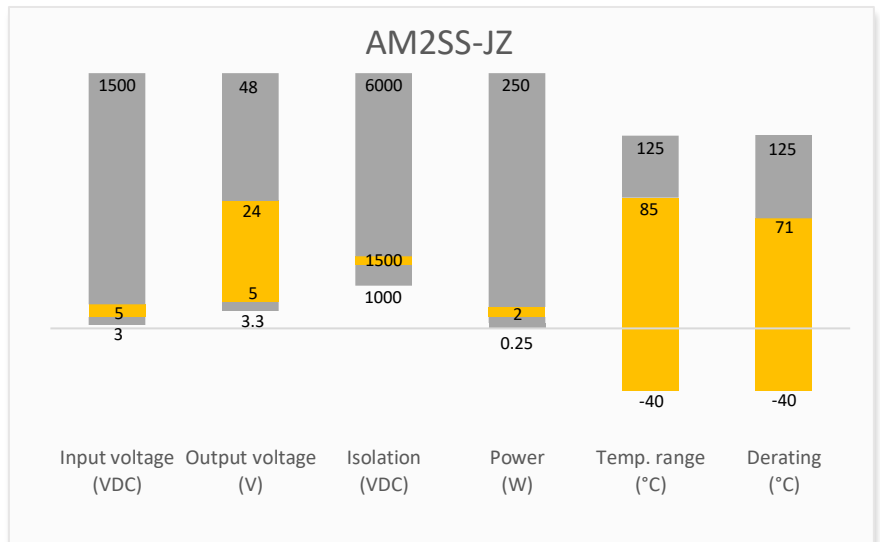

Training



Product Training Video
(click to open)



Press Release

Coming Soon!

Application Notes

Applications



IoT



Industrial



Telecom



Portable Equipment

Models & Specifications

Single Output							
Model	Input Voltage (VDC)	Output Voltage (VDC)	Input Current Full No load typ. (mA)	Output Current max min (mA)*	Isolation (VDC)	Maximum capacitive Load (μ F)	Efficiency Typ. (%)
AM2SS-0505SJZ	5 (4.5-5.5)	5	494 / 8	400 / 40	1500	2400	81
AM2SS-0509SJZ	5 (4.5-5.5)	9	477 / 8	222 / 22	1500	1000	84
AM2SS-0512SJZ	5 (4.5-5.5)	12	494 / 8	167 / 17	1500	560	81
AM2SS-0515SJZ	5 (4.5-5.5)	15	494 / 8	133 / 13	1500	560	81
AM2SS-0524SJZ	5 (4.5-5.5)	24	477 / 8	83 / 8	1500	220	84

* Performance will be degraded if the load is not within the output current range.

Input Specification				
Parameters	Conditions	Typical	Maximum	Units
Filter	Capacitor			
Absolute maximum rating	Maximum duration 1s, 5Vin	> -0.7	9	VDC
Input reflected ripple current		15		mA

Isolation Specification				
Parameters	Conditions	Typical	Maximum	Units
Tested I/O voltage	60 sec, leakage \leq 1mA	>1500		VDC
Resistance	500VDC	>1000		M Ω
Capacitance	100kHz/0.1V	20		pF

Output Specification				
Parameters	Conditions	Typical	Maximum	Units
Voltage accuracy	See output voltage tolerance	10		%
Line regulation	Per 1% Vin change		1.2	%
Load regulation	10-100% load, 5Vout models	11	20	%
	10-100% load, 9/12/15Vout models	8	15	%
	10-100% load, 24Vout models	6	15	%
Ripple & Noise*		75	200	mV pk-pk
Temperature coefficient		\pm 0.02		%/ $^{\circ}$ C

* Ripple and Noise are measured at 20MHz bandwidth. Please refer to the application note for specific details.


General Specifications				
Parameters	Conditions	Typical	Maximum	Units
Switching frequency	Full load, nominal input	220		KHz
Short circuit protection	Continuous, Auto recovery			
Operating temperature	With derating	-40 to +85		$^{\circ}$ C
Storage temperature		-55 to +125		$^{\circ}$ C
Case temperature rise	Ta = 25 $^{\circ}$ C	25		$^{\circ}$ C
Manual soldering temperature	1.5mm away from case, duration \leq 10sec		300	$^{\circ}$ C

Cooling	Free air convection			
Humidity	Non-condensing	>5	95	% RH
Vibration	10-150Hz, 5G, 0.75mm, along all axis			
Case material	Black plastic (flammability to UL 94V-0)			
Weight		1.6		g
Dimensions (L x W x H)	0.46 x 0.30 x 0.40 inches (11.60 x 7.55 x 10.16 mm)			
MTBF	3 500 000 hrs (MIL-HDBK -217F, t _a =+25°C) / Full Load			


NOTE: All specifications in this datasheet are measured at an ambient temperature of 25°C, humidity<75%, nominal input voltage and at rated output load unless otherwise specified.

Safety Specifications		
Parameters		
Standards	EMC - Conducted and radiated emission	CISPR32 / EN55032, class B with the recommended EMI circuit
	Electrostatic Discharge Immunity	IEC 61000-4-2 Air ±8KV, Contact ±6KV, Criteria B


Derating

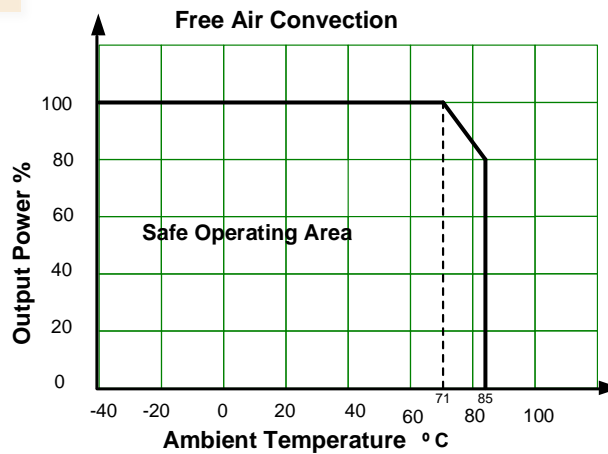

Output voltage tolerance

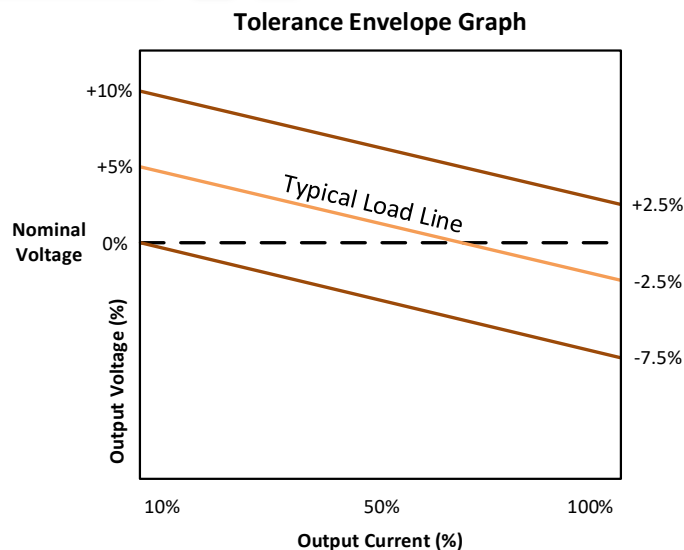


Typical application circuit

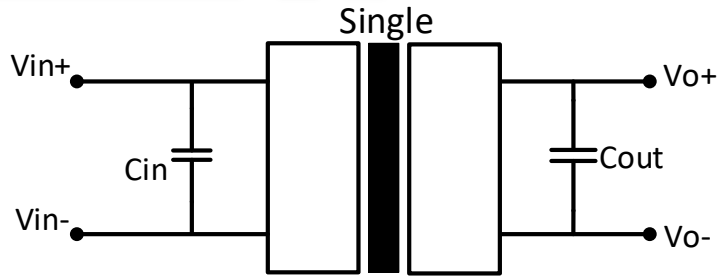




Vin	Cin	Single output models	
		Vout	Cout
5	4.7μF/16V	5V	10μF/16V
-	-	9V	2.2μF/25V
-	-	12V	2.2μF/25V
-	-	15V	1μF/25V
-	-	24V	1μF/50V

Recommended EMI circuit

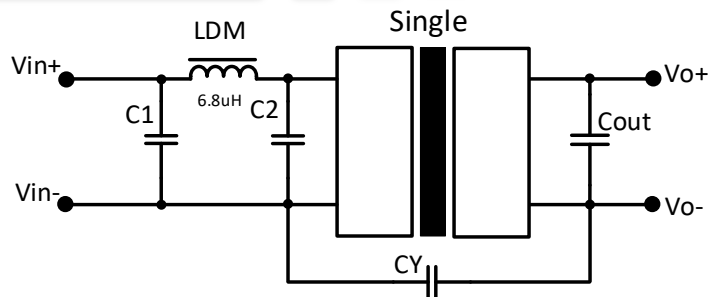

Vin	C1/C2	Vout	CY	Cout
5V	4.7μF/16V	All output	270pF/2kVdc	Refer to Cout in typical circuit

Dimensions

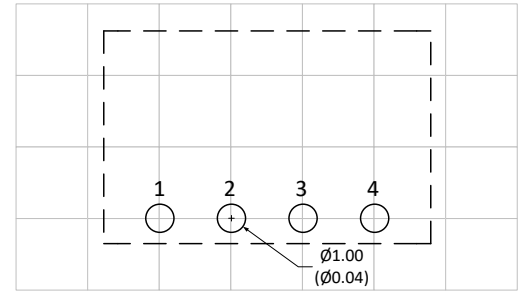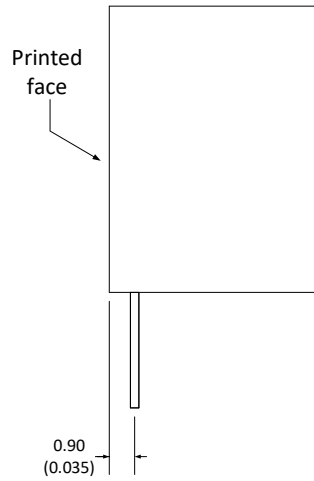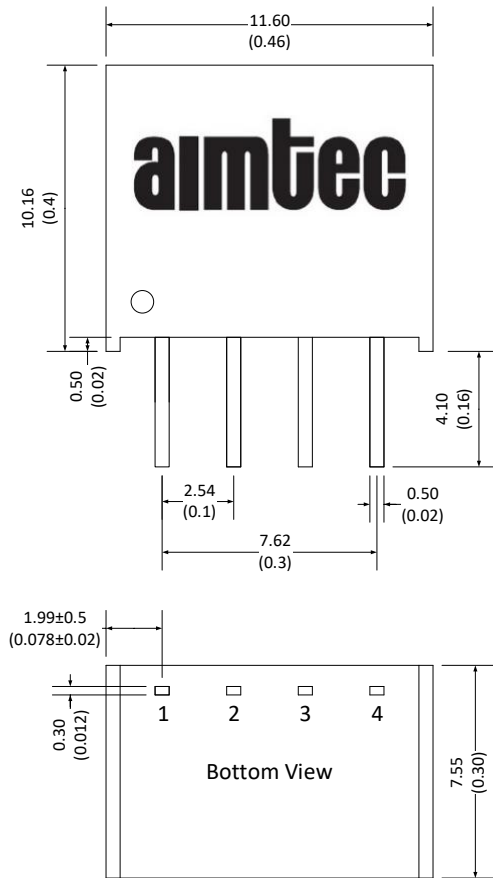

Note:
Unit: mm(inch)
General tolerance: ±0.25 (0.01)
Pin tolerance: ±0.1 (0.004)

Pin Out Specifications	
Pin	1.5KV isolation Single output
1	-V Input
3	+V Input
2	-V Output
4	+V Output

NOTE: 1. Datasheets are updated as needed and as such, specifications are subject to change without notice. Once printed or downloaded, datasheets are no longer controlled by Aimtec; refer to www.aimtec.com for the most current product specifications. 2. Product labels shown, including safety agency certifications on labels, may vary based on the date manufactured. 3. Mechanical drawings and specifications are for reference only. 4. All specifications are measured at an ambient temperature of 25°C, humidity<75%, nominal input voltage and at rated output load unless otherwise specified. 5. Aimtec may not have conducted destructive testing or chemical analysis on all internal components and chemicals at the time of publishing this document. CAS numbers and other limited information are considered proprietary and may not be available for release. 6. This product is not designed for use in critical life support systems, equipment used in hazardous environments, nuclear control systems or other such applications which necessitate specific safety and regulatory standards other the ones listed in this datasheet. 7. Warranty is in accordance with Aimtec's standard Terms of Sale available at www.aimtec.com.