

MS-2210M-6






MS-2210M-6

Power Reed Sensor
M10 metal thread

Electrical Characteristics		@ 25 °C
Contact form		A
Contact rating max.	W / VA	50
Switching voltage max.	VDC	200
	VAC	250
Switching current max.	A	1.5
	Carry current max.	A
Breakdown voltage min.	VDC	400
Total resistance max. (initial)	mΩ	300
Insulation resistance min.	Ω	10 ¹⁰


Features
➤ Adjustable switching point
➤ Metal housing with M10 thread
➤ Sensor with Power Reed Switch
➤ Various sensitivity ranges available

Magnetical Characteristics (of unmodified Reed Switch)		@ 25 °C
Pull in range available	AT	25 - 40
Drop out min.	AT	5
Test coil	TC	020
Test equipment tolerance	± AT	2

Approvals




Operating Characteristics (of unmodified Reed Switch)		@ 25 °C
Switching frequency max.	Hz	300
Resonant frequency typ.	Hz	2600
Operate time max. (incl. bounce)	ms	1
Release time max.	ms	0.4

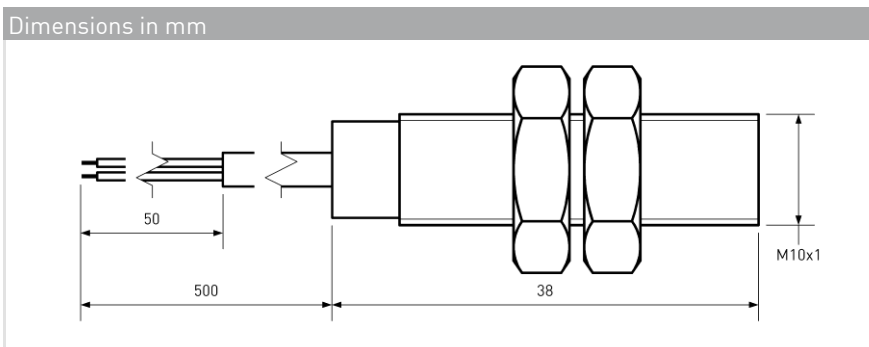Environmental Characteristics		
Operating temperature	°C	-20 to +85
Vibration (50-2000 Hz)	g	20
Shock (1/2 sin 11 ms)	g	50



Ordering Information	
Packing Unit	25 pcs
Weight per piece	35.5 g
Weight per package	905 g
Standard AT Ranges	
	4 = 25 to 30 AT
	5 = 30 to 35 AT
	6 = 35 to 40 AT
Ordering Example	
MS-2210M-6-4 describes MS-2210M-6 with 25 to 30 AT.	

MS-2210M-6





MS-2210M-6

Power Reed Sensor
M10 metal thread

Material Information

	Material	Colour
Housing	Brass, Nickel plated	
Cable	UL 2464, AWG 24, 50 mm dismantled, 4 mm stripped and tinned	Jacket: black, wires: black and red
Potting compound	Epoxy	black
Nuts	Brass, Nickel plated, M10, 2 pcs separately packed	

Test Procedure of final Reed Sensor

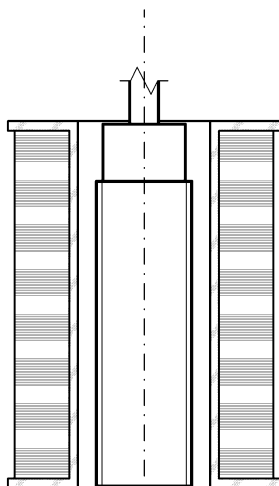

Test Coil placed in vertical position

Reed Sensor axially centered in Test Coil

Measured without nuts

Test Parameters

Test coil	TC-324	
Test programs		
	AT range	Test program
	4 =	MS-2210M-6-4
	5 =	MS-2210M-6-5
	6 =	MS-2210M-6-6

Remarks

When mounted onto ferromagnetic parts switching distance of MS-2210M-6 may reduce.
Electromagnetical influences and magnetic fields may change the switching behaviour of the sensor.

Matching actuator MSM-2210M available as well.