

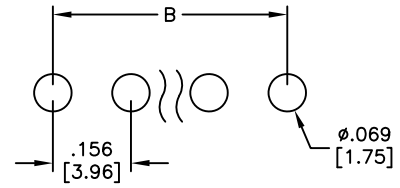


APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	7/23/13	
A		REVISED SHAPE.	7/24/13	
B		REVISED DIM.	2/17/14	AY/MY
C		REVISED SPEC.	2/24/20	AY/KL

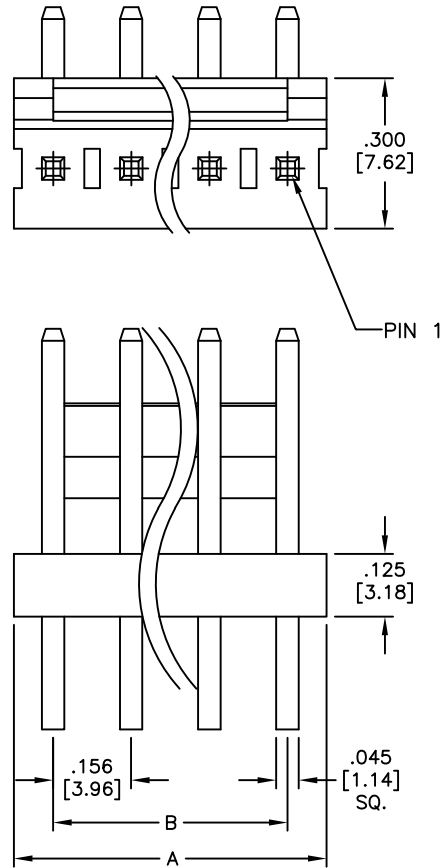

RECOMMENDED PCB LAYOUT

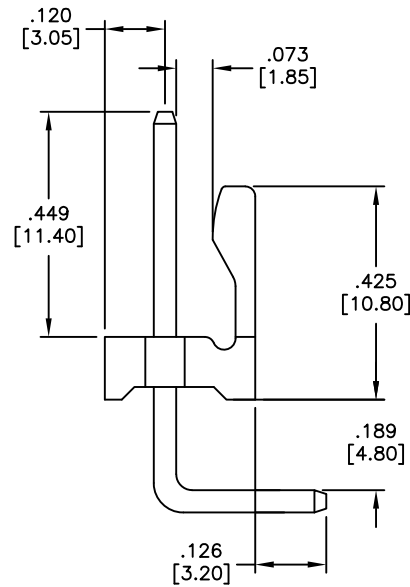

Positions: 2 thru 20
 A = .156 [3.96] x No. of Positions
 B = .156 [3.96] x No. of Spaces

SPECIFICATIONS:
 Material:
 Insulator: Ny66, rated UL 94V-0
 Insulator color: White
 contact: Brass
 Plating:
 Tin over Nickel underplate overall
 Electrical:
 Current rating: 7.0 Amp
 Contact Resistance: 20 mohms max.
 Insulation resistance: 1,000 Mohms min
 Dielectric withstanding voltage: 1,000 VAC/DC
 Temperature Rating:
 Operating temperature: -40°C to +105°C
 Environmental:
 Lead free, RoHS compliant



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES HOLES .X ± .10 Ø.X ± .10 .XX ± .020 Ø.XX ± .015 .XXX ± .015 Ø.XXX ± .010		ADAM TECH INTERCONNECTS		909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710	
APPROVALS		DATE		TITLE	
DRAWN	AY	7/23/13		.156 [3.96] HEADER, REVERSE RIGHT ANGLE	
CHECKED	LW	7/23/13		SIZE	PART NO.
APPROVED				X	LHD-XX-TRB-V0
				REV.	C
				REF: S00019C	SCALE: NTS
				SHEET 1 OF 1	