
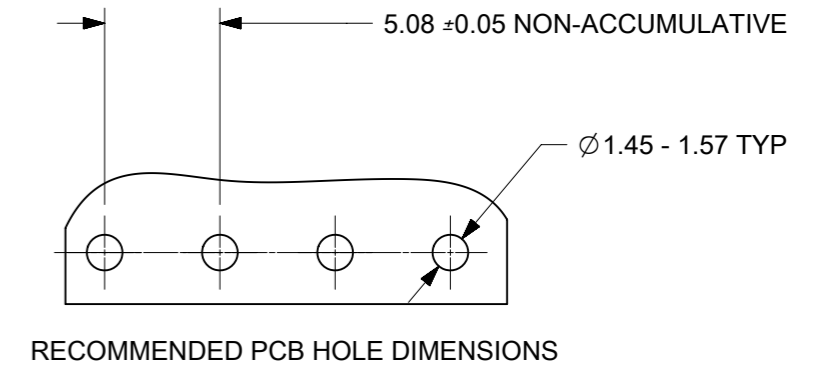
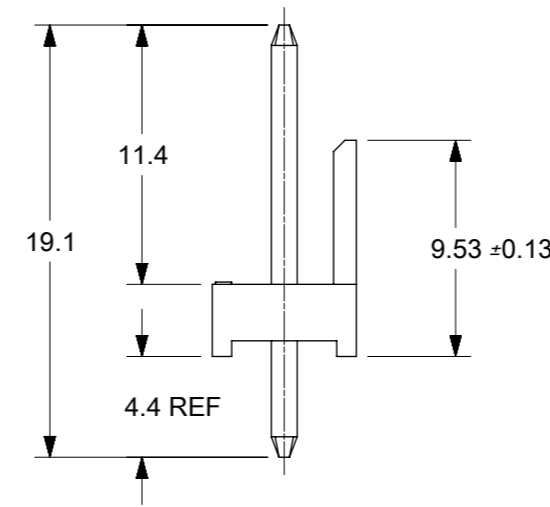
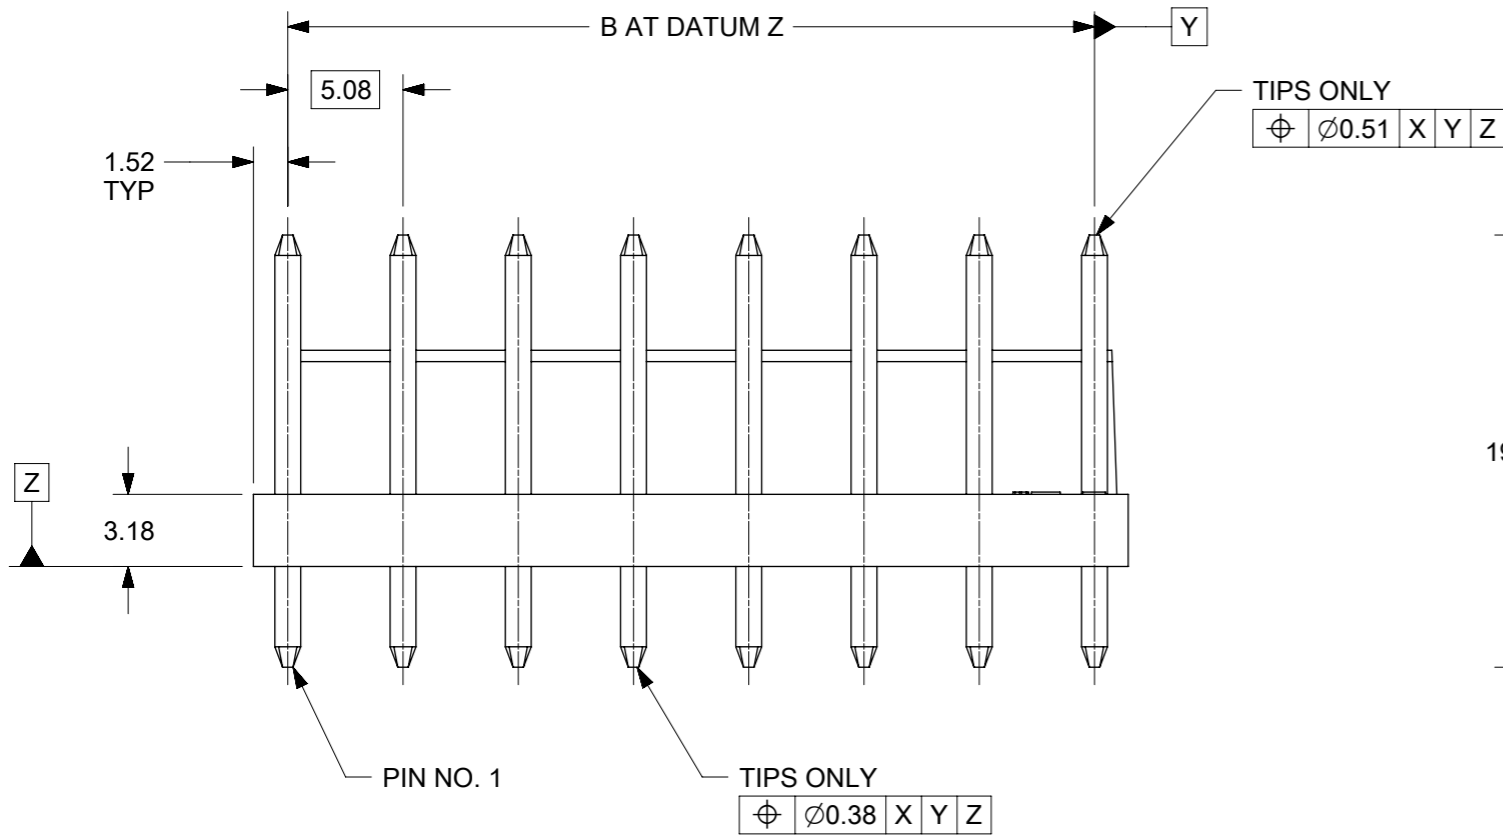


TABLE

PART NUMBER	NO OF CIRCUITS	DIM "A"	DIM "B"
173083-0002	2	8.08	5.08 ± 0.13
173083-0003	3	13.16	10.16 ± 0.13
173083-0004	4	18.24	15.24 ± 0.13
173083-0005	5	23.32	20.32 ± 0.13
173083-0006	6	28.40	25.40 ± 0.15
173083-0007	7	33.48	30.48 ± 0.18
173083-0008	8	38.56	35.56 ± 0.18
173083-0009	9	43.64	40.64 ± 0.20
173083-0010	10	48.72	45.72 ± 0.20
173083-0011	11	53.80	50.80 ± 0.20
173083-0012	12	58.88	55.88 ± 0.23

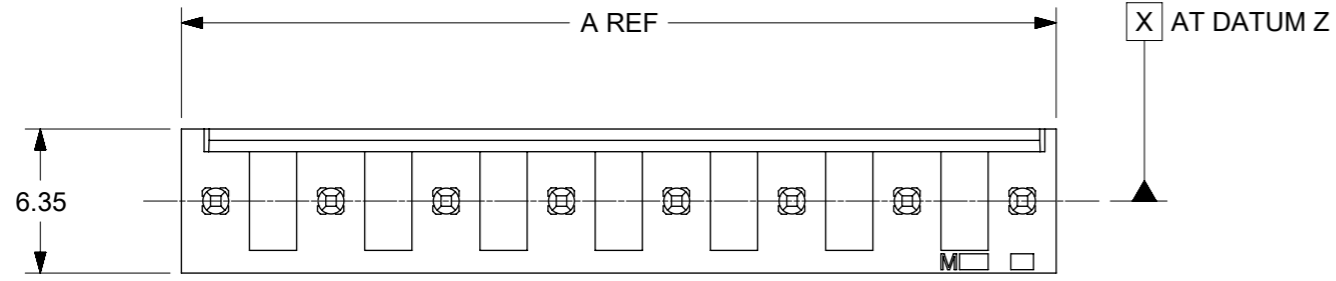

NOTES:

1. WAFER MATERIAL: NYLON PA6, UL94V-2
TERMINAL PIN: 1.14 DIA. BRASS
2. PLATING: TIN OVER NICKEL OVERALL
2.5µm MIN OVERALL TIN OVER
1.25µm MIN OVERALL NICKEL
3. PRODUCT SPECIFICATION: PS-173083-0001
4. PINS MUST CONFORM TO MOLEX SOLDERABILITY SPEC. ES-152
5. RECOMMENDED PCB THICKNESS 1.6MM
6. THIS PART CONFORMS TO CLASS B REQUIREMENTS OF COSMETIC SPECIFICATION PS-45499-002
7. PACKAGING SPECIFICATION: PK-88596-1132

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION											
QUALITY SYMBOLS ▽A = 0 ▽E = 0 ▽F = 0 ▽G = 0 ▽H = 0 ▽I = 0 ▽J = 0 ▽K = 0 ▽L = 0	NOTES UPDATED EC NO: 108603 DRWN: SS06 CHK'D: SS06 APPR: ISHWARG	GENERAL TOLERANCES (UNLESS SPECIFIED) ANGULAR TOL ± 0.5 °		DIMENSION UNITS MM	SCALE 3:1						
		4 PLACES ±	3 PLACES ±	SS06	DATE 2015/02/09						
		2 PLACES ± 0.25	1 PLACE ± 0.35	CHK'D BY	DATE	PRODUCT CUSTOMER DRAWING KK VERT HDR 5.08 PITCH WITH POLARISING WALL GLOW WIRE VERSION SERIES 173083					
		0 PLACES ±	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	ISHWARG	DATE 2015/02/26						
				DRAWING SIZE A3	THIRD ANGLE PROJECTION	SERIES 173083	MATERIAL NUMBER SEE TABLE	CUSTOMER GENERAL MARKET			
						DOCUMENT NUMBER SD-173083-0001	DOC TYPE PSD	DOC PART 000	SHEET NUMBER 1 OF 1		