




| | , | |
|-----------------------|---|----|
| $ \left\{ \right\} $ | | OR |
| | | |







NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:

THERMOPLASTIC POLYESTER, UL94V-0 STEEL, NICKEL PLATED COPPER ALLOY, GOLD FLASH PLATED


OPERATING TEMPERATURE:


.XX

±0.13 .XXX ±0.05

POWER/CO-AX CONTACT RATING: 10A (CURRENT) (IF PRESENT) SIGNAL CONTACT CURRENT RATING: 5A PER CONTACT SIGNAL CONTACT RESISTANCE: 10mΩ MAX. 5000MΩ min.

INSULATOR RESISTANCE: DIELECTRIC WITHSTANDING VOLTAGE:

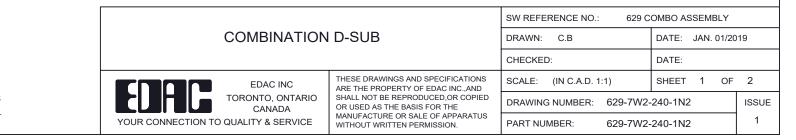





THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY. -55°C ~ 125°C

1000V AC rms

