

EPC2047 – Enhancement-Mode Power Transistor


Preliminary Specification Sheet



Status: Engineering

Features:

- V_{DS} , 200 V
- Maximum $R_{DS(on)}$, 10 m Ω
- I_D , 32 A



Applications:

- Multi-level AC-DC Power Supplies
- Synchronous Rectification (48 V_{OUT})
- Wireless Charging
- Solar Micro Inverters
- Robotics
- Class D Audio
- Low Inductance Motor Drives

EPC2047 eGaN® FETs are supplied in passivated die form with solder bumps.
Die Size: 4.6 mm x 1.6 mm

Maximum Ratings			
V_{DS}	Drain-to-Source Voltage (Continuous)	200	V
I_D	Continuous ($T_A = 25^\circ\text{C}$, $R_{\theta JA} = 8^\circ\text{C/W}$)	32	A
	Pulsed (25°C , $T_{PULSE} = 300 \mu\text{s}$)	160	
V_{GS}	Gate-to-Source Voltage	6	V
	Gate-to-Source Voltage	-4	
T_J	Operating Temperature	-40 to 150	°C
T_{STG}	Storage Temperature	-40 to 150	

Static Characteristics ($T_J = 25^\circ\text{C}$ unless otherwise stated)						
PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT	
BV_{DSS}	Drain-to-Source Voltage	$V_{GS} = 0 \text{ V}$, $I_D = 0.45 \text{ mA}$	200			V
I_{DSS}	Drain Source Leakage	$V_{DS} = 160 \text{ V}$, $V_{GS} = 0 \text{ V}$		0.1	0.3	mA
I_{GSS}	Gate-to-Source Forward Leakage	$V_{GS} = 5 \text{ V}$		1	5	mA
	Gate-to-Source Reverse Leakage	$V_{GS} = -4 \text{ V}$		0.1	0.3	mA
$V_{GS(TH)}$	Gate Threshold Voltage	$V_{DS} = V_{GS}$, $I_D = 7 \text{ mA}$	0.8	1.6	2.5	V
$R_{DS(on)}$	Drain-Source On Resistance	$V_{GS} = 5 \text{ V}$, $I_D = 20 \text{ A}$		7	10	m Ω
V_{SD}	Source-Drain Forward Voltage	$I_S = 0.5 \text{ A}$, $V_{GS} = 0 \text{ V}$		2.1		V

Thermal Characteristics			
		TYP	UNIT
$R_{\theta JC}$	Thermal Resistance, Junction to Case	0.8	°C/W
$R_{\theta JB}$	Thermal Resistance, Junction to Board	9.5	°C/W
$R_{\theta JA}$	Thermal Resistance, Junction to Ambient (Note 1)	52	°C/W

Note 1: $R_{\theta JA}$ is determined with the device mounted on one square inch of copper pad, single layer 2 oz copper on FR4 board.
 See http://epc-co.com/epc/documents/product-training/Appnote_Thermal_Performance_of_eGaN_FETs.pdf for details.

EPC2047 – Enhancement-Mode Power Transistor

Preliminary Specification Sheet



Dynamic Characteristics (T _v = 25°C unless otherwise stated)						
PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
C _{ISS}	Input Capacitance	V _{DS} = 100 V, V _{GS} = 0 V		875	1050	pF
C _{RSS}	Reverse Transfer Capacitance			4		
C _{OSS}	Output Capacitance			390	585	
C _{OSS(ER)}	Effective Output Capacitance, Energy Related (note 2)	V _{DS} = 0 to 100 V, V _{GS} = 0 V		450		
C _{OSS(TR)}	Effective Output Capacitance, Time Related (note 3)			570		
R _G	Gate Resistance			0.5		Ω
Q _G	Total Gate Charge	V _{DS} = 100 V, V _{GS} = 5 V, I _D = 20 A		8.2	10.2	nC
Q _{GS}	Gate-to-Source Charge	V _{DS} = 100 V, I _D = 20 A		2.9		
Q _{GD}	Gate-to-Drain Charge			1.8		
Q _{G(TH)}	Gate Charge at Threshold			2		
Q _{OSS}	Output Charge	V _{DS} = 100 V, V _{GS} = 0 V		60	86	
Q _{RR}	Source-Drain Recovery Charge			0		

Note 2: C_{OSS(ER)} is a fixed capacitance that gives the same stored energy as C_{OSS} while V_{DS} is rising from 0 to 50% BV_{DSS}.

Note 3: C_{OSS(TR)} is a fixed capacitance that gives the same charging time as C_{OSS} while V_{DS} is rising from 0 to 50% BV_{DSS}.

Figure 1: Typical Output Characteristics at 25°C


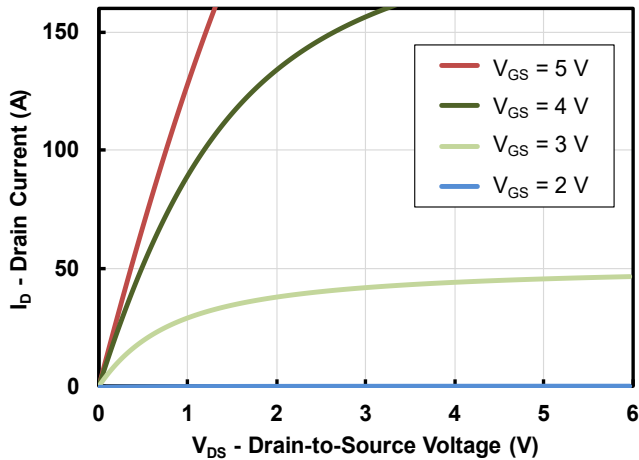


Figure 2: Transfer Characteristics

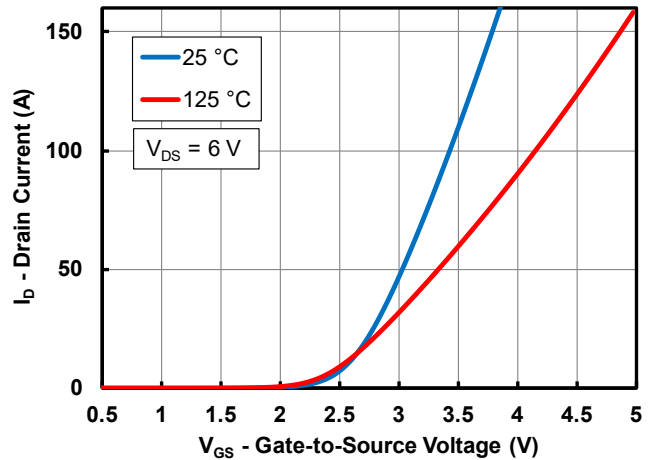

EPC2047 – Enhancement-Mode Power Transistor Preliminary Specification Sheet



Figure 3: $R_{DS(on)}$ vs V_{GS} for Various Drain Currents

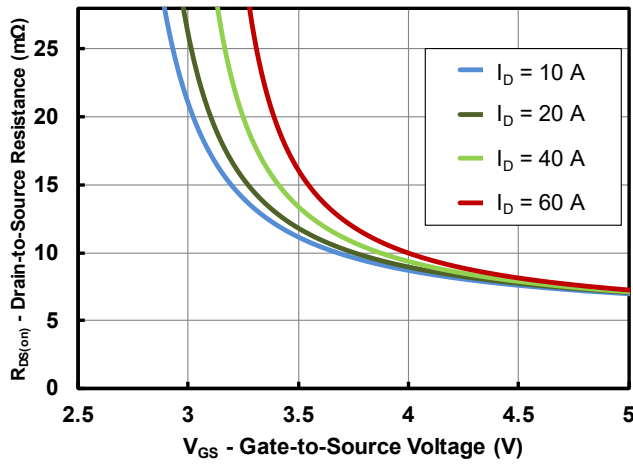


Figure 4: $R_{DS(on)}$ vs V_{GS} for Various Temperatures

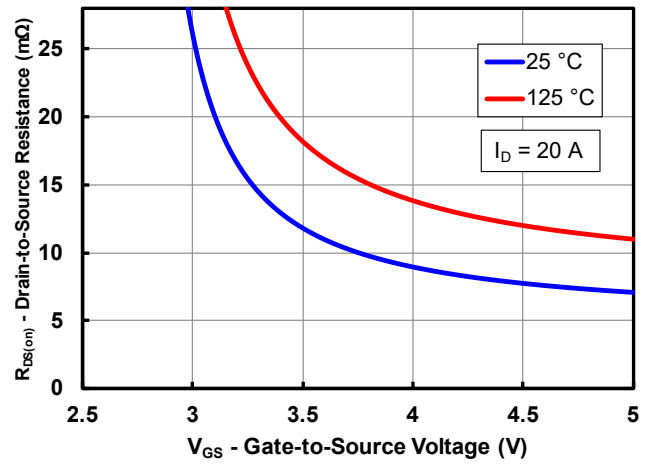


Figure 5a: Capacitance (Linear Scale)

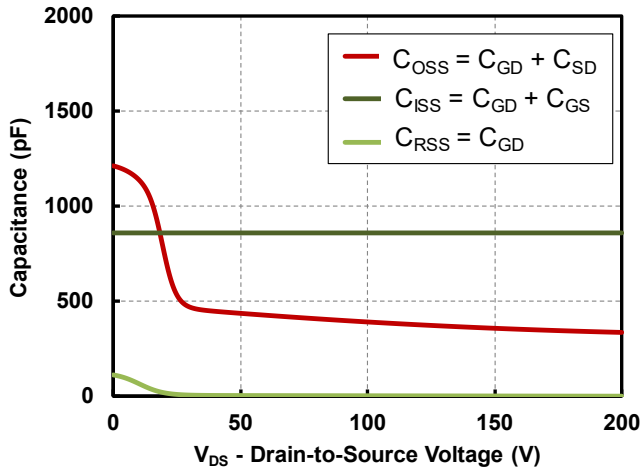


Figure 5b: Capacitance (Log Scale)

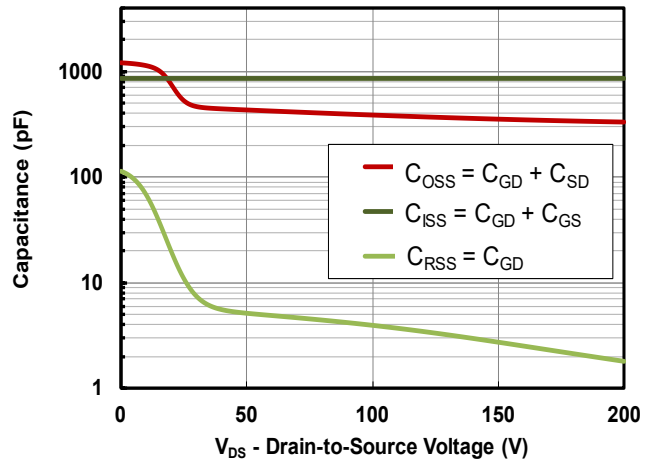


Figure 5c: Output Charge and C_{OSS} Stored Energy


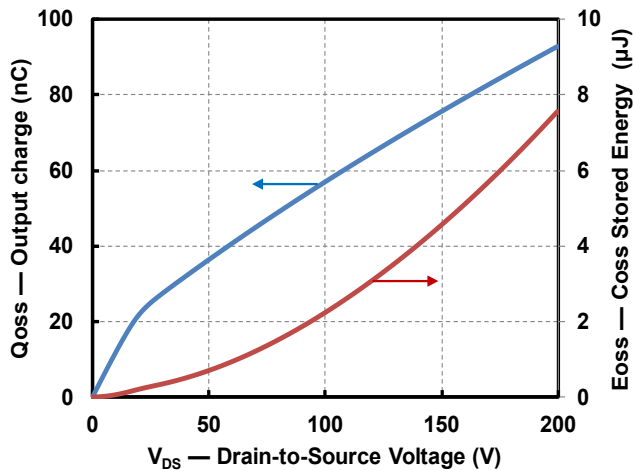


Figure 7: Gate Charge

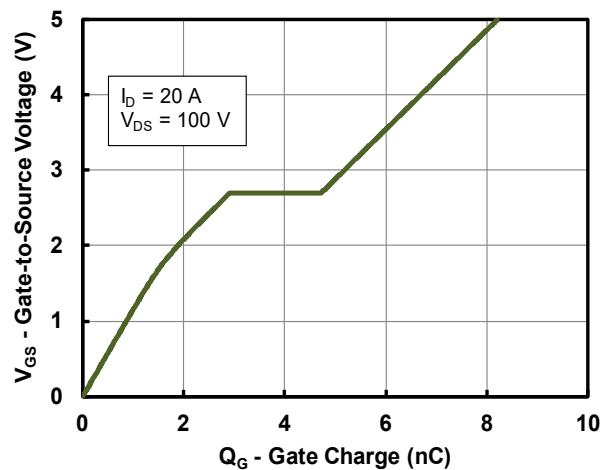

EPC2047 – Enhancement-Mode Power Transistor Preliminary Specification Sheet



Figure 8: Reverse Drain-Source Characteristics

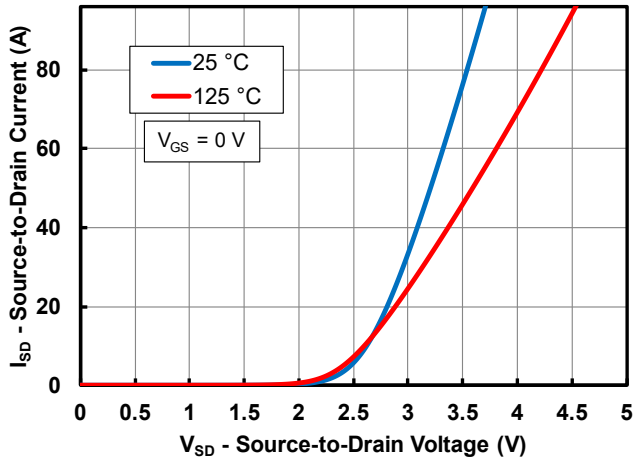


Figure 9: Normalized On-State Resistance vs Temperature

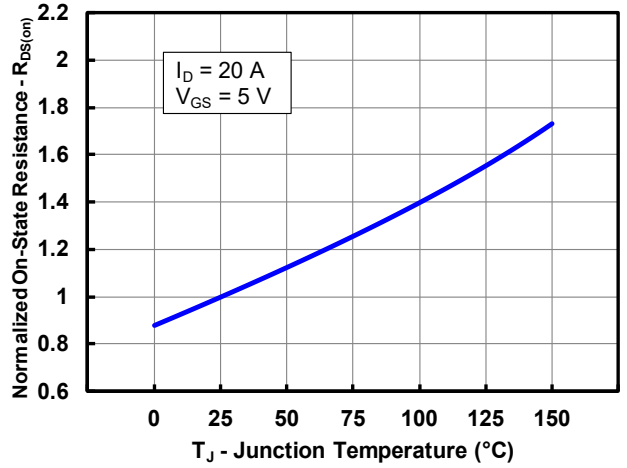


Figure 10: Normalized Threshold Voltage vs Temperature


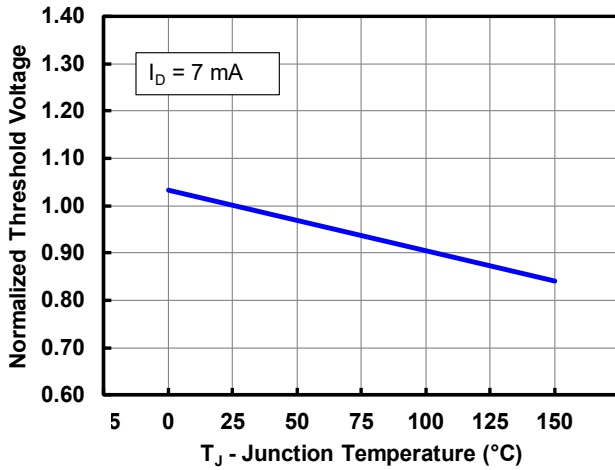




Figure 11: Safe Operating Area

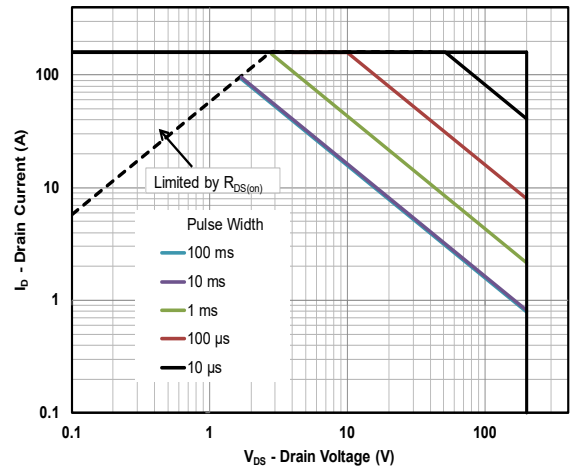

EPC2047 – Enhancement-Mode Power Transistor Preliminary Specification Sheet





Figure 12a: Transient Thermal Response Curves (Junction-to-Case)

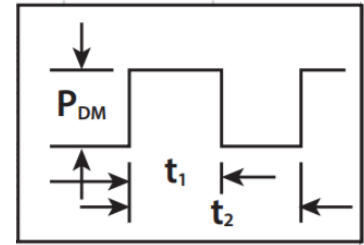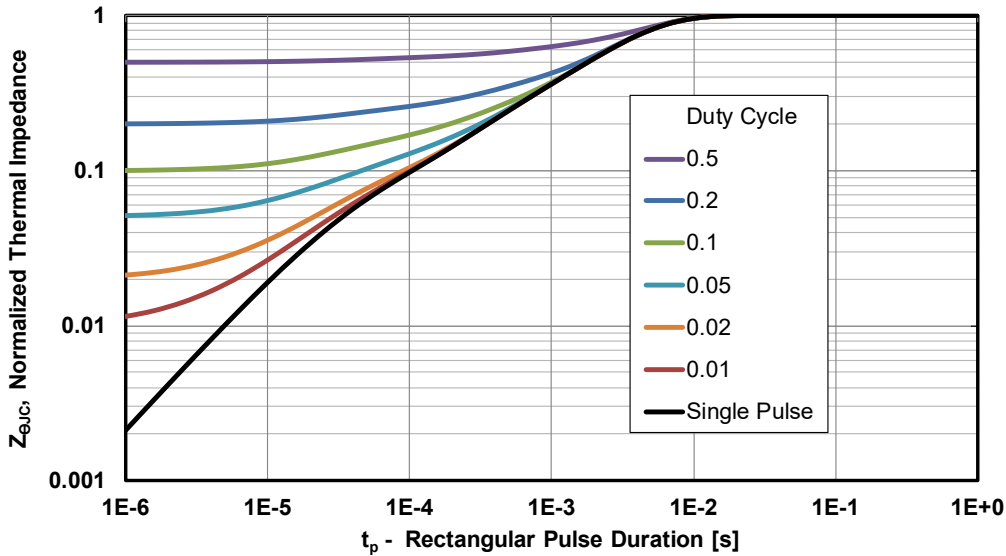

Notes:
 Duty Factor: $D = t_1/t_2$
 Peak $T_J = P_{DM} \times Z_{\theta JC} \times R_{\theta JC} + T_C$

Figure 12b: Transient Thermal Response Curves (Junction-to-Board)

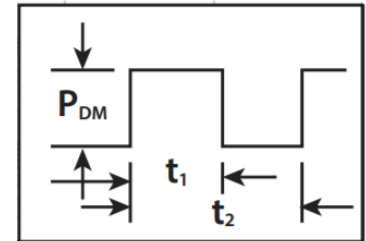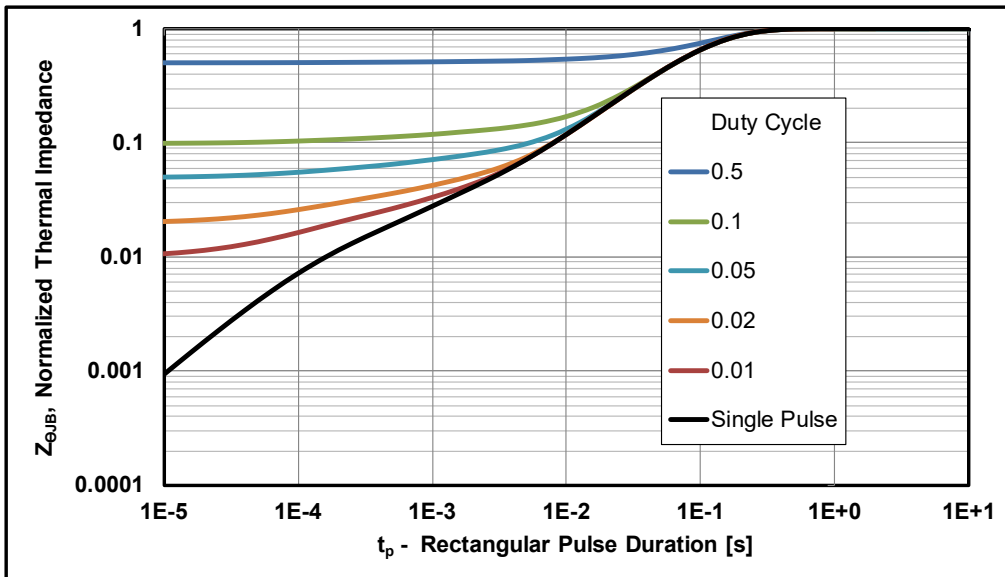


Notes:
 Duty Factor: $D = t_1/t_2$
 Peak $T_J = P_{DM} \times Z_{\theta JB} \times R_{\theta JB} + T_B$


EPC2047 – Enhancement-Mode Power Transistor

Preliminary Specification Sheet

DIE MARKINGS

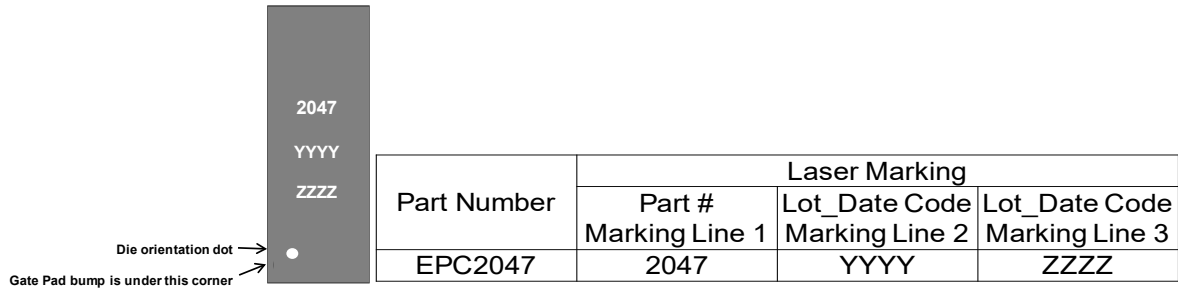


TAPE AND REEL CONFIGURATION

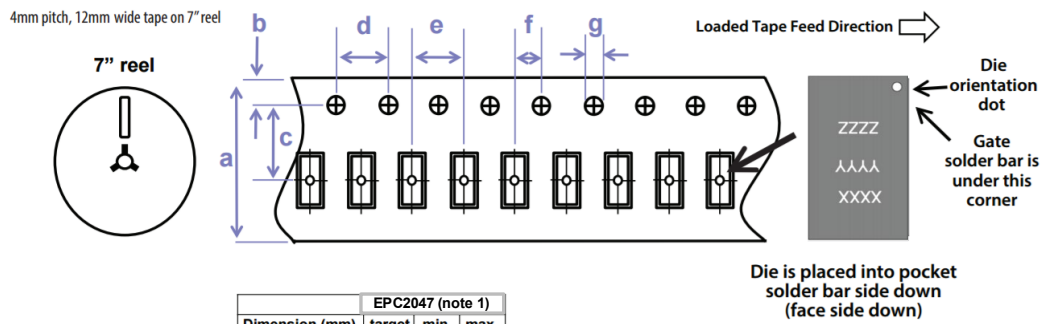

Note 1: MSL 1 (moisture sensitivity level 1) classified according to IPC/JEDEC industry standard.
 Note 2: Pocket position is relative to the sprocket hole measured as true position of the pocket, not the pocket hole.

DIE OUTLINE


Solder Bar View

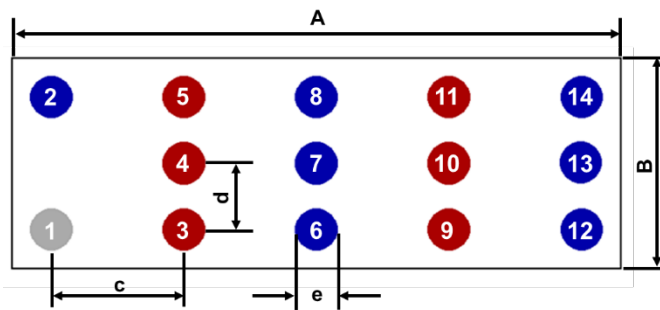


DIM	MICROMETERS		
	MIN	Nominal	MAX
A	4570	4600	4630
B	1570	1600	1630
c	1000	1000	1000
d	500	500	500
e	332	369	406

Pads 1 is Gate;
 Pads 3, 4, 5, 9, 10, 11 are Drain;
 Pads 2, 6, 7, 8, 12, 13, 14 are Source;

Side View

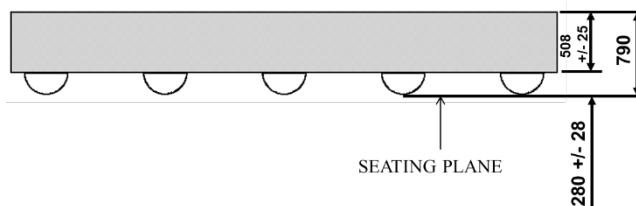

EPC2047 – Enhancement-Mode Power Transistor Preliminary Specification Sheet

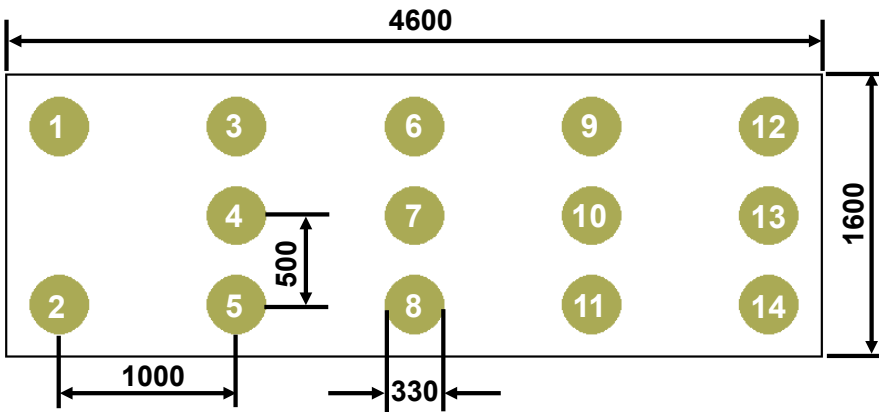


RECOMMENDED LAND PATTERN
(measurements in μm)

Pads 1 is Gate;
Pads 3, 4, 5, 9, 10, 11 are Drain;
Pads 2, 6, 7, 8, 12, 13, 14 are Source

The land pattern is solder mask defined
Solder mask is $10\mu\text{m}$ smaller per side than bump

RECOMMENDED STENCIL DRAWING

(measurements in μm)

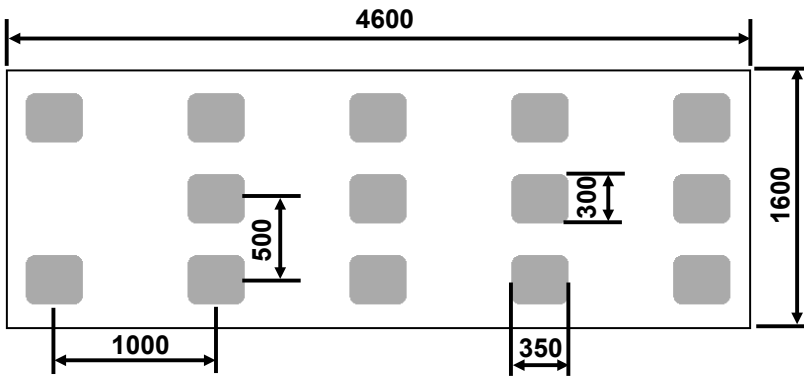

Recommended stencil should be 4mil ($100\mu\text{m}$) thick, must be laser cut, openings per drawing.

The corner has a radius of R60

Intended for use with SAC305 Type 3 or Type 4 solder, reference 88.5% metals content.

Additional assembly resources available at epc-co.com/epc/DesignSupport/AssemblyBasics.aspx

Efficient Power Conversion Corporation (EPC) reserves the right to make changes without further notice to any products herein. Engineering devices, designated with an ENG* suffix at point of purchase, are first article products that EPC is preparing for production release. Specifications may change on final production release of the device. If you have questions please [contact us](#). EPC does not assume any liability arising out of the application or use of any product or circuit described herein; neither does it convey any license under its patent rights, nor the rights of other.

eGaN® is a registered trademark of Efficient Power Conversion Corporation.
EPC Patents: <http://epc-co.com/epc/AboutEPC/Patents.aspx>

Revised January, 2019