



LAYOUT SHOWN AS EXAMPLE

Keying Shown as example

**CHARACTERISTICS**

- Standard : Based on MIL-DTL-38999 Series III
- Shell Material : Composite
- Shell Plating : Nickel
- Insulator : Thermoplastic
- Contacts : Copper Alloy
- Seals & Grommet : Silicon Elastomer
- Contact Plating : Gold over copper Alloy 0.8µm minimum
- Durability : 500 Mating cycles
- Delivered with Souriau contacts and Accessories
- Temperature Range : -65°C to +200°C
- Salt Spray : 2000 hours
- Mass : 47.3 g ± 10%


| Connector dimension |          |
|---------------------|----------|
| Dim                 | Nominal  |
| ØS                  | 41.7 Max |
| Z'                  | 31.5 Max |
| VV THREAD           | M31x1-6g |

SOURIAU shall not be liable for any non-conformity or damage due to a use of the Products which does not comply with the Specifications issued by either of the Parties or by a third party (professional recommendation, technical notice.)

|         |                             |
|---------|-----------------------------|
| Country | Jurisdiction & Control List |
| FR      | Not Listed                  |

**PN: 8D521M75PC**

|   |                                    |                                |                               |
|---|------------------------------------|--------------------------------|-------------------------------|
| A   | 08-10-2016                         | First Release                  |                               |
| ISS   | DATE                               | Latest modification - by       | MOD N°                        |
| Designed By:  |                                    | Date:                          | <b>CUSTOMER DRAWING</b>       |
| <b>TITLE</b>  |                                    | Composite Plug 8D series       |                               |
| SCALE   | NA                                 | General linear Tolerances: ±-- | NPRDS / PROJECT<br><b>859</b> |
| <b>SOURIAU</b>  |                                    | <b>WWW.SOURIAU.COM</b>         |                               |
| This document is the property of SOURIAU it must not be reproduced or communicated without permission |                                    |                                |                               |
| FORMAT  | <b>SOURIAU DRG N° 8D521M75PC-C</b> |                                | SHEET<br>1/2                  |

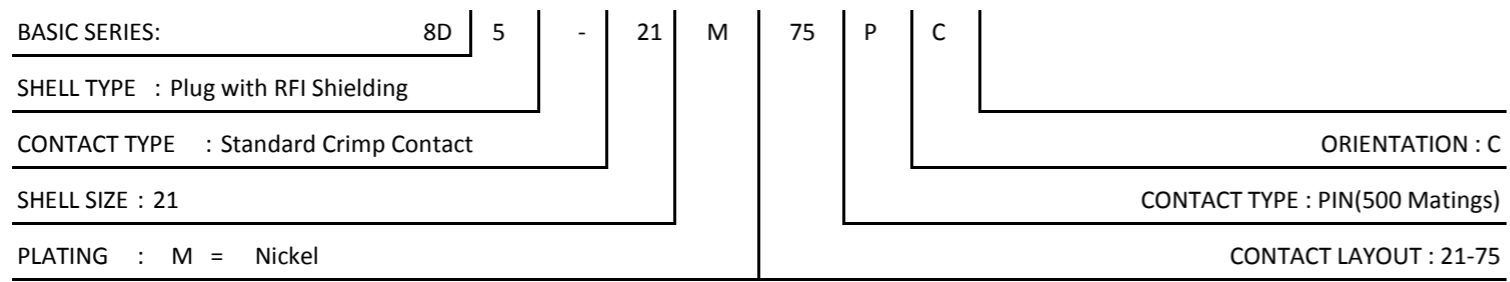

Contact Layout



(Inactive for new design for MIL-DTL-38999. For new design, use arrangement no. 21-76.)

| Contacts<br>(Insert arrangement 21-75) |             |             |
|--|-------------|-------------|
| Contact position ID                    | Location    |             |
|  | X axis      | Y axis      |
| A                                      | +180 (4.57) | +180 (4.57) |
| B                                      | +180 (4.57) | -180 (4.57) |
| C                                      | -180 (4.57) | -180 (4.57) |
| D                                      | -180 (4.57) | +180 (4.57) |

| Shell size | Arrangement no. | Number of contacts | Size contacts   | Service rating | Contact location | Standard contact |               |
|------------|-----------------|--------------------|-----------------|----------------|------------------|------------------|---------------|
|            |                 |                    |                 |                |                  | Pin              | Socket        |
| 21         | -75             | 4                  | 8<br>(see note) | Twinax         | All              | M39029/90-529    | M39029/91-530 |

SOURIAU shall not be liable for any non-conformity or damage due to a use of the Products which does not comply with the Specifications issued by either of the Parties or by a third party (professional recommendation, technical notice.)

| Country | Jurisdiction & Control List |
|---------|-----------------------------|
| FR      | Not Listed                  |

PN: 8D521M75PC

|                |                                    |                            |   |
|----------------|------------------------------------|----------------------------|---|
| A              | 08-10-2016                         | First Release              |   |
| ISS            | DATE                               | Latest modification - by   | MOD N°  |
| Designed By:   |                                    | Date:                      | <b>CUSTOMER DRAWING</b>   |
| <b>TITLE</b>   | <b>Composite Plug 8D series</b>    |                            |   |
| SCALE          |                                    | General linear Tolerances: | NPRDS / PROJECT   |
| NA             |                                    | ±--                        | <b>859</b>  |
| <b>SOURIAU</b> | <b>WWW.SOURIAU.COM</b>             |                            | This document is the property of SOURIAU it must not be reproduced or communicated without permission |
| FORMAT         | <b>SOURIAU DRG N° 8D521M75PC-C</b> |                            | SHEET<br>2/2  |