

ITEM	PART#	DESCRIPTION	QTY	UOM
A	436400300	MicroFit 3.0 Plug SR Pnl Mnt 3Ckt	1	PC
B	430310023	MICROFIT 3.0 M CRP TERM CHN 30AU 18AWG	3	PC
C	--	PAPER PRINTED PAPER WHITE	1	PC

FROM	TO	DESCRIPTION	COLOR
A1	--	1X18AWG DISC SR-PVC BK UL10002	BLACK
A2	--	1X18AWG DISC SR-PVC BK UL10002	BLACK
A3	--	1X18AWG DISC SR-PVC BK UL10002	BLACK

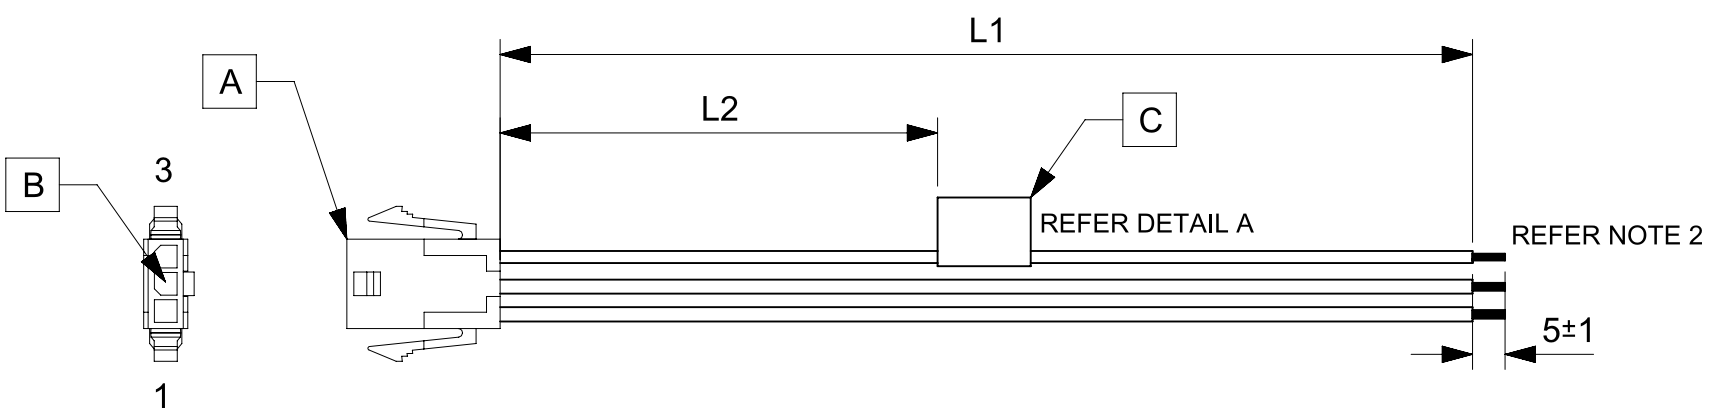


TABLE			
PART NUMBER	L1	L2	TITLE
2147532031	150±8	63 REF	MICROFIT 3.0 SR P-S 3CKT 150 MM Au
2147532032	300±10	138 REF	MICROFIT 3.0 SR P-S 3CKT 300 MM Au
2147532033	600±10	288 REF	MICROFIT 3.0 SR P-S 3CKT 600 MM Au

- NOTES**
1. Connector view shown is from mating side.
 2. Free ends must be stripped, twisted & tinned. The length of tinning is 5±1mm. Tinning dia must be 1.55mm Max.
 3. Label text must be 2mm max. in height with Arial font.
 4. Label must be wrapped in Flag type on a single cable.

MOLEX P/N
 MOLEX
 BATCH WK/YR
 DETAIL A

PRE-RELEASE
 REFERENCE
 USE ONLY

REVISION			
DATE	REV	DESCRIPTION	CHANGER
2020/02/29	A	INITIAL RELEASE	ARAJU

FUNCTIONAL SYMBOLS $\frac{E}{A} = 0$ $\frac{E}{E} = 0$ $\frac{E}{P} = 0$ DIVISIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		CURRENT REV DESC:				
	DIMENSION UNITS	SCALE	GENERAL TOLERANCES (UNLESS SPECIFIED)				
	mm	NTS	ANGULAR TOL ± °				
	4 PLACES ±		EC NO: 637489				
3 PLACES ±		DRWN: ARAJU 2020/03/02		PRODUCT CUSTOMER DRAWING			
2 PLACES ±		CHK'D: RDESAI01 2020/05/14					
1 PLACE ±		APPR: RDESAI01 2020/05/14					
0 PLACES ±		INITIAL REVISION:		DOCUMENT NUMBER	DOC TYPE	DOC PART	REVISION
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION	DRAWING	SERIES	MATERIAL NUMBER	CUSTOMER	SHEET NUMBER
			A4-SIZE	214753	2147532031	GENERAL MARKET	1 OF 1

DOCUMENT STATUS	P1	RELEASE DATE	2020/05/14	03:37:13
-----------------	----	--------------	------------	----------