

Order No.: 1145726

Type: DMCC 0,5/ 4-ST-SHL 7,0-2,54

PCB connector



The figure shows a 2-pos. version with 4 contacts

## 1 Main features



- |                           |                      |                        |                     |
|---------------------------|----------------------|------------------------|---------------------|
| • No. of pos.             | 4                    | • Nominal current      | 6 A                 |
| • Conductor cross section | 0.34 mm <sup>2</sup> | • Nominal voltage      | 160 V               |
| • Color                   | black (9005)         | • Connection direction |                     |
| • Pitch                   | 2.54 mm              | • Type of packaging    | packed in cardboard |
| • Connection method       |                      |                        |                     |

## 2 Your advantages

- ✓ Contacts arranged in a double row enable high packing density in a compact area
- ✓ Gold-plated contacts ensure transfer quality remains stable over the long term
- ✓ Tools for manual and automatic crimping available as an option



Make sure you always use the latest documentation.  
It can be downloaded at: [phoenixcontact.net/product/1145726](https://phoenixcontact.net/product/1145726)

**3 Table of contents**

1	Main features.....	1
2	Your advantages .....	1
3	Table of contents .....	2
4	3D model in PDF can be activated (Acrobat Reader only).....	3
5	General Technical Data .....	4
6	Material properties.....	5
7	Dimensions.....	6
8	Series drawing.....	7
9	Packaging information .....	8
10	Application.....	8
11	General tests .....	9
12	Mechanical tests.....	9
13	Insertion and withdrawal forces .....	10
14	Electrical tests .....	11
15	Current carrying capacity/derating curves .....	12
16	Environmental and durability tests .....	13
17	Classification for connectors.....	13
18	Approvals / Certificates.....	14
19	Commercial Data.....	15
20	corresponding headers.....	15
21	Accessories.....	15
22	Combination tests.....	16

1145726 DMCC 0,5/ 4-ST-SHL 7,0-2,54

**4 3D model in PDF can be activated (Acrobat Reader only)**



**1145726 DMCC 0,5/ 4-ST-SHL 7,0-2,54****5 General Technical Data****5.1 item properties**

Order No.	1145726
Type	DMCC 0,5/ 4-ST-SHL 7,0-2,54
Plug-in system	MICRO COMBICON - DFMC 0,5 lock & shielded
Product type	PCB connector
Range of articles	DMCC 0,5/...-ST-SHL
Pitch	
Range of positions	...
Number of positions	4

**5.2 Mounting**

Type of locking	shielded connection
	Lock & Shield

**5.3 Connection capacity AWG**

Conductor cross section AWG	22
-----------------------------	----

**1145726 DMCC 0,5/ 4-ST-SHL 7,0-2,54****6 Material properties****6.1 Material of metal parts**

Note	WEEE/RoHS-compliant, whisker-free acc. to IEC 60068-2-82/JEDEC JESD 201
Contact material	Cu alloy
Terminal point surface	Tin (4 - 8 µm Sn)
Surface contact area	Nickel (2 - 4 µm Ni) , Gold (0.25
Surface characteristics	Selective coating

**6.2 Material of plastic parts**


	Housing
Color	black (9005)
Insulating material	PA
Insulating material group	I
CTI according to IEC 60112	600
Flammability rating according to UL 94	V0
Glow wire flammability index GWFI according to EN 60695-2-12	850
Glow wire ignition temperature GWIT according to EN 60695-2-13	775
Temperature for the ball pressure test according to EN 60695-10-2	125 °C

**1145726 DMCC 0,5/ 4-ST-SHL 7,0-2,54****7 Dimensions****7.1 Dimensions for the product**

Length	33 mm
Width	12.22 mm
Total height	7.85 mm
Dimension a	2.54 mm

1145726 DMCC 0,5/ 4-ST-SHL 7,0-2,54

8 Series drawing

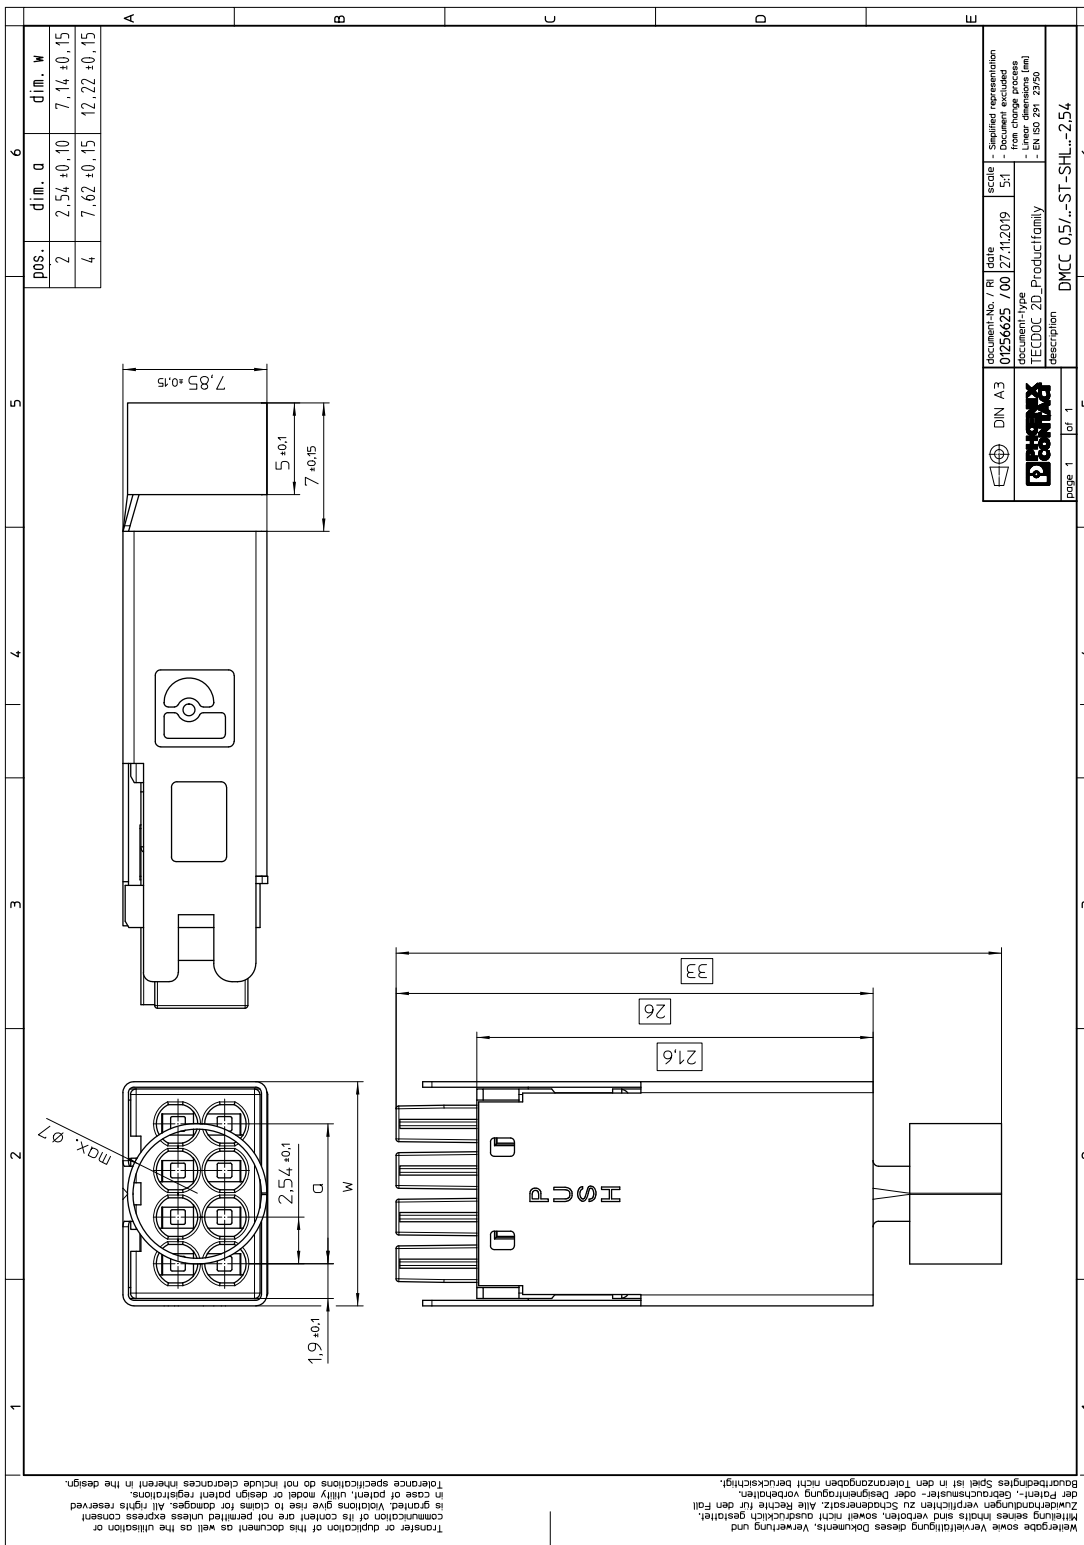

**1145726 DMCC 0,5/ 4-ST-SHL 7,0-2,54****9 Packaging information**

Type of packaging	packed in cardboard
Pieces per package	100

**10 Application****10.1 Temperature limit values**

Ambient temperature (storage/transport)	-20 °C ... 70 °C
Ambient temperature (assembly)	-5 °C ... 80 °C
Ambient temperature (installation)	-40 °C ... 80 °C (dependent on the derating curve)
Ambient temperature (mobile installation)	-20 °C 80 °C dependent on the derating curve



**1145726 DMCC 0,5/ 4-ST-SHL 7,0-2,54****11 General tests****11.1 Specification**

Specification	IEC 61984
Specification	IEC 60352-2

**12 Mechanical tests****12.1 Tensile strength of crimped connections**

Result	Test passed
Specification	IEC 60512-16-4:2008-06
Conductor cross section/conductor type/tractive force setpoint/actual value	/ flexible / > 40 N / flexible / > 15 N

**12.2 Visual examination**

Specification	IEC 61984:2008-10
Visual examination	Test passed
Specification	IEC 60512-1-1:2002-02

**12.3 Dimensional test**

Dimensional test	Test passed
Specification	IEC 60512-1-2:2002-02

**12.4 Resistance of marking**

Resistance of marking	Test passed
Specification	IEC 60068-2-70:1995-12

**12.5 Polarization and coding**

Polarization and coding	Test passed
Specification	IEC 60512-13-5:2006-02
Test force	20 N

**12.6 Contact retention in insert**

Contact retention in insert	Test passed
Specification	IEC 60512-15-1:2008-05
Test force per pos.	20 N

**1145726 DMCC 0,5/ 4-ST-SHL 7,0-2,54****13 Insertion and withdrawal forces**

Insertion and withdrawal force	Test passed
Specification	IEC 60512-13-2:2006-02
No. of cycles	100
Insertion strength per pos. approx.	2 N
Withdraw strength per pos. approx.	1 N

**1145726 DMCC 0,5/ 4-ST-SHL 7,0-2,54****14 Electrical tests****14.1 Electrical data**

Rated current / conductor cross section	6 A / 0.34 mm <sup>2</sup>
Rated insulation voltage (III/2)	160 V
Rated surge voltage (III/2)	2.5 kV
Contact resistance	5.2 mΩ
Degree of pollution	2

**14.2 Air and creepage distances**


Component	PCB connector		
Specification	IEC 60664-1:2007-04		
Mains type	unearthed mains		
Insulating material group	I		
Comparative tracking index (IEC 60112:2003-01)	CTI 600		
Rated insulation voltage	160 V	160 V	320 V
Rated surge voltage	2.5 kV	2.5 kV	2.5 kV
Degree of pollution	3	2	2
Overvoltage category	III	III	II
Minimum clearance case A (inhomogeneous field)	1.5 mm	1.5 mm	1.5 mm
Minimum value of the creepage path requirement in acc. with table	2 mm	1.5 mm	1.6 mm

## 1145726 DMCC 0,5/ 4-ST-SHL 7,0-2,54

## 15 Current carrying capacity/derating curves

Specification	IEC 61984:2008-10
Note	Representation based on IEC 60512-5-2:2002-02
Note	For number of positions, see diagram
Reduction factor	0.8
Conductor cross section	0.34 mm <sup>2</sup>

Type: DMCC 0,5/...-ST-SHL 7,0-2,54 with DMC 0,5/...-G1SHL-2,54P20THRR...

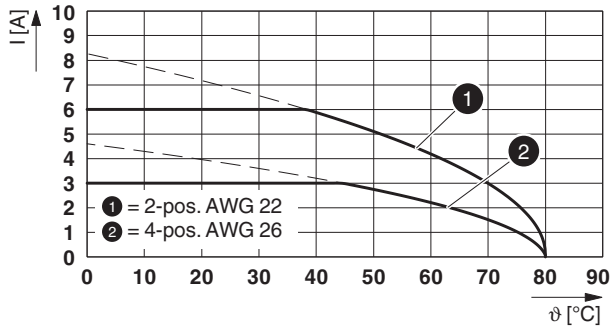

**1145726 DMCC 0,5/ 4-ST-SHL 7,0-2,54****16 Environmental and durability tests****16.1 Vibration test**

Specification	IEC 60068-2-6:2007-12
Result	Test passed
Frequency	10 - 150 - 10 Hz
Sweep speed	1 octave/min
Amplitude	0.35 mm (10 - 60.1 Hz)
Acceleration	50 m/s <sup>2</sup> (60.1 - 150 Hz)
Test duration per axis	2.5 h
Test directions	X-, Y- and Z-axis
Note	The connected conductor loops were guided to the test sample at a distance of approx. 10 cm.

**16.2 Railway application, vibration test**

Specification	IEC 61373:2010-05
Result	Test passed
Testing	Vibration, broadband noise
Frequency	5 - 150 Hz
Test directions	X-, Y- and Z-axis (pos. and neg.)
Spectrum	Service life test category 1, class B, body mounted

**17 Classification for connectors**

Specification	IEC 61984:2008-10
Main features	Connectors without switching capacity (COC)
Construction form	Fixed connectors
Strain relief elements	without strain relief
Connection method	Can be reconnected
Protection against electric shock	Not encapsulated - touch-proof when inserted
Protective conductor	without PE
Lock	no
Connection method	Crimp connections

1145726 DMCC 0,5/ 4-ST-SHL 7,0-2,54

---

## 18 Approvals / Certificates

**1145726 DMCC 0,5/ 4-ST-SHL 7,0-2,54****19 Commercial Data**

Order No.	1145726
Type	DMCC 0,5/ 4-ST-SHL 7,0-2,54
Pieces per package	100
Net weight	2.22 g
GTIN	4063151136062
	Information that applies locally, see link on page 1
Country of origin	Information that applies locally, see link on page 1

**20 corresponding headers**

Order No.	Type
1145402	DMC 0,5/ 4-G1SHL-2,54P20THRR24
1145419	DMCV 0,5/ 4-G1SHL-2,54P20THR24
1145728	DMCC 0,5/ 4-ST-WOSH-2,54
1145830	DMCC 0,5/ 4-SHIELD L 7,0-2,54

**21 Accessories**

Description	Order No.	Type
	1013425	MCC 0,5-MP AU 0,14-0,5
	1013420	MCC 0,5-MP AU 0,14-0,5 R
	1013419	MCC 0,5-MP AU 0,34-0,75
	1013418	MCC 0,5-MP AU 0,34-0,75 R
Crimping pliers, for COMBICON crimp connectors with cross section: 0.14 ... 0.75 mm <sup>2</sup> . Unlockable pressure lock, precise parallel crimping, front entry, B crimp, incl. 2 positioning aids	1064998	CRIMPFOX-P CC 0.75 L
	1145402	DMC 0,5/ 4-G1SHL-2,54P20THRR24
	1145419	DMCV 0,5/ 4-G1SHL-2,54P20THR24
	1145728	DMCC 0,5/ 4-ST-WOSH-2,54
	1145830	DMCC 0,5/ 4-SHIELD L 7,0-2,54

## 1145726 DMCC 0,5/ 4-ST-SHL 7,0-2,54

## 22 Combination tests



## DMCC 0,5/...-ST-SHL

IEC 61984	IEC 61984			
<b>Mechanical tests (A)</b>				
Insertion/withdrawal force per position	approx. 2 N / 1 N			
Polarization when inserted Requirement >20 N	Test passed			
Contact holder in insert Requirements >20 N	Test passed			
<b>Durability tests (B)</b>				
Contact resistance R <sub>1</sub>	5.2 mΩ			
Insertion/withdrawal cycles	100			
Contact resistance R <sub>2</sub>	4.6 mΩ			
Rated impulse voltage at sea level Voltage waveform ≥ (1.2/50 μs)	2.95 kV			
Power-frequency withstand voltage Voltage waveform ≥ (50/60 Hz)	1.39 kV			
<b>Thermal tests (C)</b>				
Tested number of positions	2			
Tested conductor cross section	0.34 mm <sup>2</sup>			
Test current	6 A			
Upper limiting temperature Requirements < 100°C	Test passed			
<b>Climatic tests (D)</b>				
Test sequence 1: low temperature storage	-40 °C/2 h			
Test sequence 2: heat storage	80 °C/168 h			
Test sequence 3: noxious gas storage (ISO 6988)	0.2 dm <sup>3</sup> SO <sub>2</sub> on 300 dm <sup>3</sup> / 40 °C/1 cycle			
Rated impulse voltage at sea level Voltage waveform ≥ (1.2/50 μs)	2.95 kV			
Power-frequency withstand voltage Voltage waveform ≥ (50/60 Hz)	1.39 kV			
<b>Environmental and endurance tests (E)</b>				
Specification	IEC 61984:2008-10			
Degree of protection	Finger safety with IP20 test finger			