

THIS IS A C.A.D. GENERATED DRAWING TOLERANCE UNLESS OTHERWISE SPECIFIED DO NOT MAKE MANUAL REVISIONS TO MASTER.

ISSUE NUMBER	
ORIGINAL	(1)

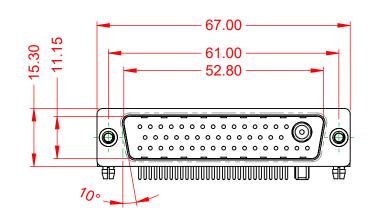



NOTES:


MATERIAL: HOUSING: SHELL: CONTACT:

DIELECTRIC

OPERATING TEMPERATURE:


WITHSTANDING VOLTAGE:

THERMOPLASTIC POLYESTER, UL94V-0 STEEL, NICKEL PLATED



POWEF (IF PRE	R/CO-AX CONT/ SENT)	ACT RATING:	40A (CURRENT)
	CONTACT CU		5A PER CONTACT 10mΩ MAX.
INSULA	TOR RESISTAN	NCE:	5000MΩ min.

.X ±0.25 .XX ±0.13 .XXX ±0.05



	COMBINATION D-SUB		SW REFERENCE NO.: 629 COMBO ASSEMBLY			
			DRAWN:	C.B	DATE: JAN. 01	2019
			CHECKED):	DATE:	
TORONTO, C	EDAC INC	ARE THE PROPERTY OF EDAD INC. AND O, ONTARIO SHALL NOT BE REPRODUCED, OR COPIED NADA OR USED AS THE BASIS FOR THE	SCALE:	(IN C.A.D. 1:1)	SHEET 1 C	F 2
	CANADA OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATI		DRAWING NUMBER: 629-47W12		1240-4N3	ISSUE
YOUR CONNECTION TO		MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	PART NU	MBER: 629-47W	1240-4N3	1



COMPLIANT

THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

-55°C ~ 125°C

1000V AC rms

COPPER ALLOY, GOLD FLASH PLATED

