



Date	SYM	REVISION RECORD	AUTH	DR.	CK.
08/12/11	B	ADDED LOCATION OF PEGS	T.B.	B.S.	
10/07/11	C	ADDED UL FLAME RATING TEMP. RANGE WAS +315°C	T.B.	B.S.	
11/21/14	D	UPDATED TO ROHS 2 COMPLIANT	T.B.	B.S.	

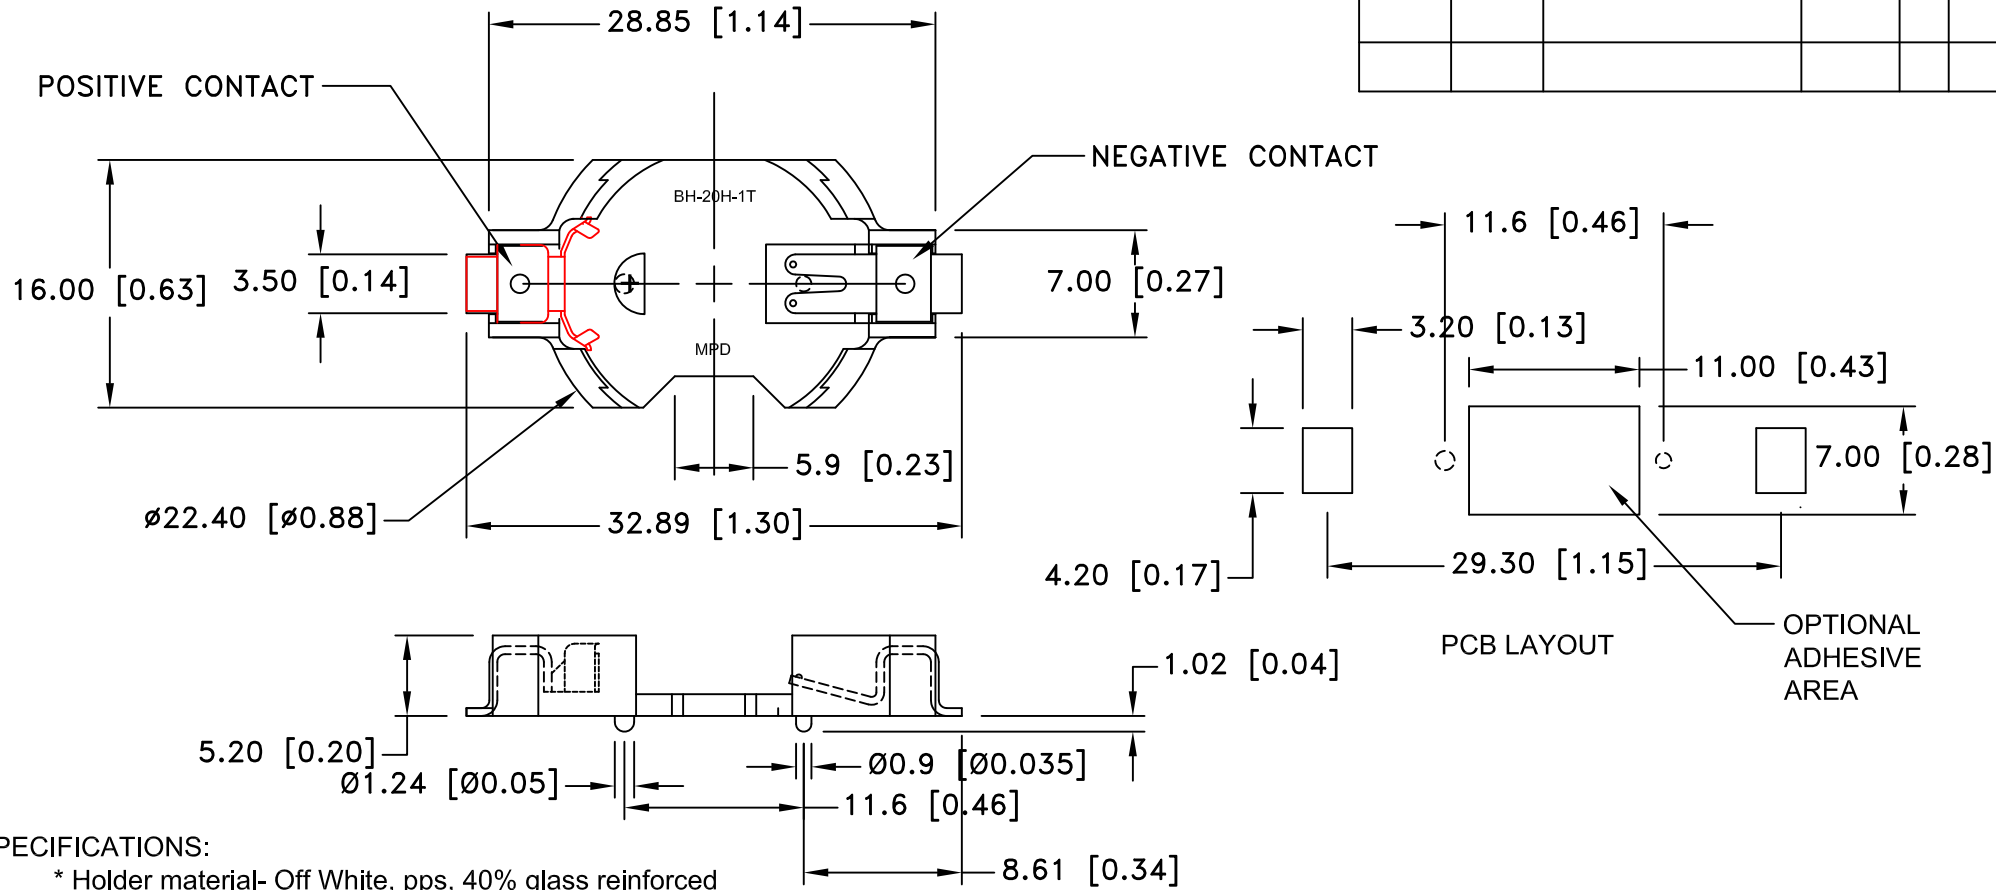

SPECIFICATIONS:

- * Holder material- Off White, pps, 40% glass reinforced
UL File No. E107854, UL 94V-0
- * Contacts : 0.020" thick STAINLESS STEEL 301, spring temper,
Nickel Plated
- * Temperature range: -40°C to +260°C
- * Vibration Test: 10-50-10 Hz swept in 60 seconds
X,Y,Z direction: 1 hour each direction
- * Result: No dislodgement of the cell or damage
No discontinuity over 10 micro-seconds
- * Shock Test: Half sine wave acceleration 150G. 6 micro-seconds
3 shock pulses each direction per axis, total of 18 pulses
- * Result: No evidence of physical damage+
- * Good Resistance to chemicals
- * ROHS 2 Compliant

Tolerance (Except as noted)	 Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735		
	decimal ±.5 (.020)	Scale	Drawn By B.S. Approved By T.B.
Fractional ± .8 (.030)	Title SMD CR2032 BATTERY HOLDER		
Angular ± 3°	Date 11/21/14	Drawing Number BH-20H-1T	