




SMPM-PF-P-HF-RA-TH-1



SMPM-PF-P-HG-ST-EM-1



PRFIA-SMPM-J-J-S-2



SMPM-PS-P-HG-ST-TH-1

SMPM, PRFIA SERIES

50 Ω SMPM PLUGS/BULLETS TO 65 GHz

SMPM Cable Mates:

RF047-A, RF086,
RF23C

SMPM Mates:

PRFIA

Cable Components:

PRFMO

PRFIAMates:

SMPM

SPECIFICATIONS

For complete specifications see
www.samtec.com?SMPM-TH,
www.samtec.com?SMPM-EM
or www.samtec.com?PRFIA

Contact Material:

BeCu

Shell Material:

BeCu

Insulator Material:

PTFE

Operating Temperature:



-65 °C to +125 °C

Frequency Range:

0-65 GHz

Impedance:

50 Ω

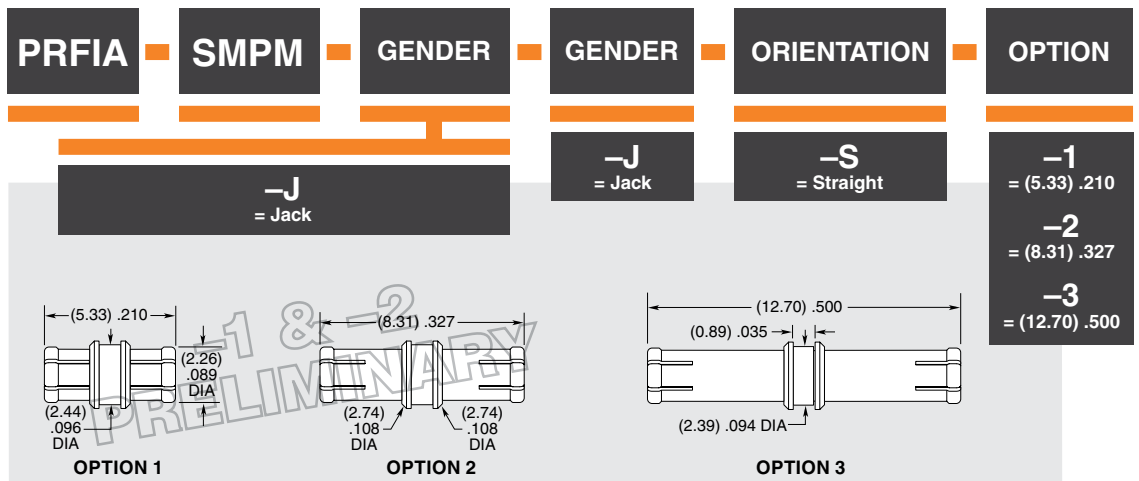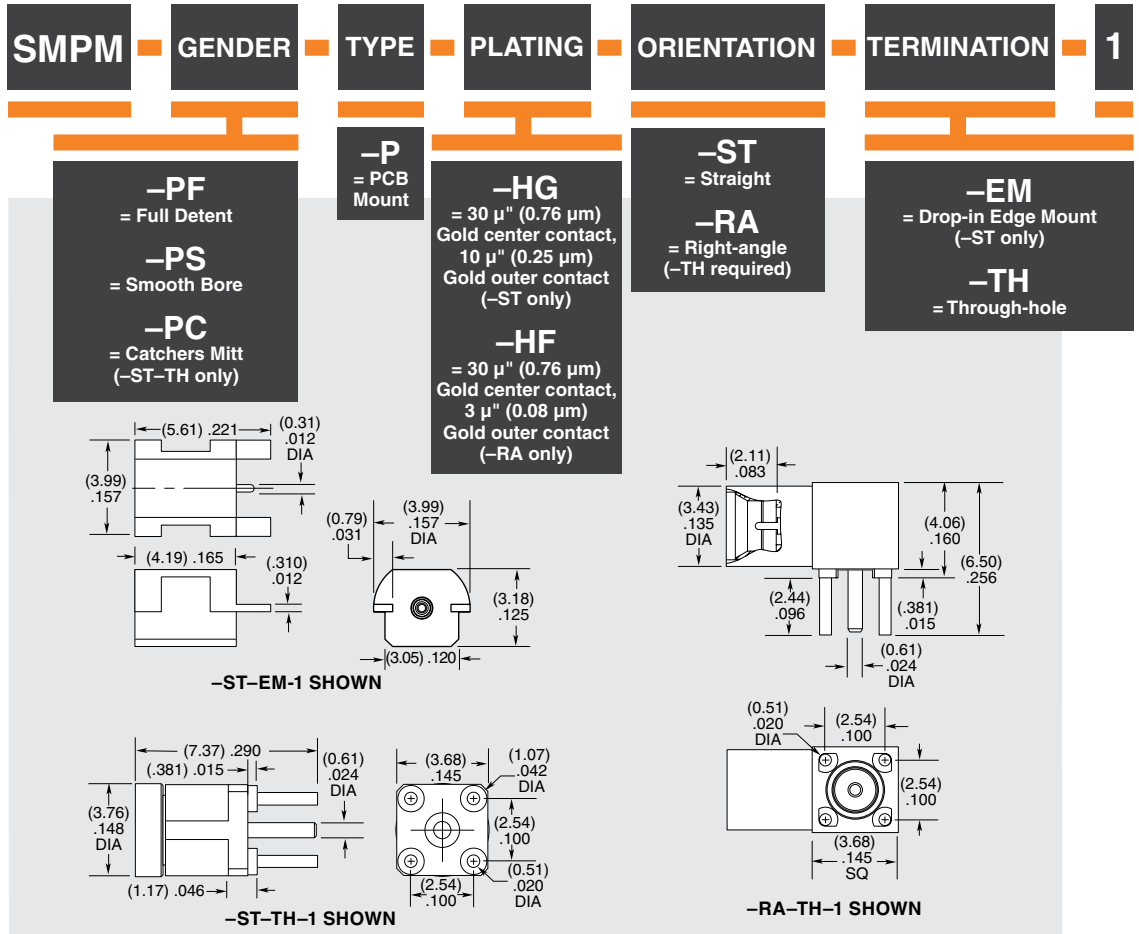

Due to technical progress, all designs, specifications and components are subject to change without notice.

WWW.SAMTEC.COM

All parts within this catalog are built to Samtec's specifications.

Customer specific requirements must be approved by Samtec and identified in a Samtec customer-specific drawing to apply.