


1. Wiring Diagram.

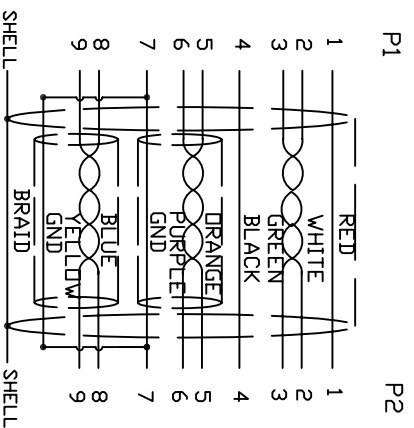

2. Cable test condition :

- Open / Short : 100%
 - Insulation resistance : 5M ohms
 - Contact resistance : 2 ohm
 - Hipot : DC 300V / 1 sec
3. Each pcs with PE polybag

6	CORE	RH14.2*28.5*6.35mm	2						
5	CONN	USB3.0 B MAILE G/F BLUE	1	P2					
4	PVC	45P PVC BLACK OVERMOLD	25g						
3	PE	LLDPE 500026 6201	16g						
2	CONN	USB3.0 A/M G/F BLUE	1	P1					
1	CABLE	《28AWG (7/0.12TC) *IP+D(7/0.10TC)+AL+M》*2+28AWG (7/0.12TC) *IP+24AWG(7/0.21TC)*2C+A+D+B (96/0.12AM) ODS.5 BLACK	1	2000mm					
NO.	PART NO.	DESCRIPTION		QTY	UNIT/REF				
BILL OF MATERIAL									

A	2015/11/24	INITIAL RELEASE	2015/11/24
REV/ECN#		DESCRIPTION	DATE
Cnc Tech, LLC			
DRAWN	EDWIN LAI	DATE	11/24/15
CHECKED	WENC	DATE	11/24/15
APPROVAL		CUSTOMER P/N:	
		CUSTOMER:	
		SHEET	1 OF 1

TITLE		DATE
USB3.0 A/M-B/M W/FRPRTS,2M		2015/11/24
DWN NO.	103-1030-BL-F0200	REV
REV		REV