
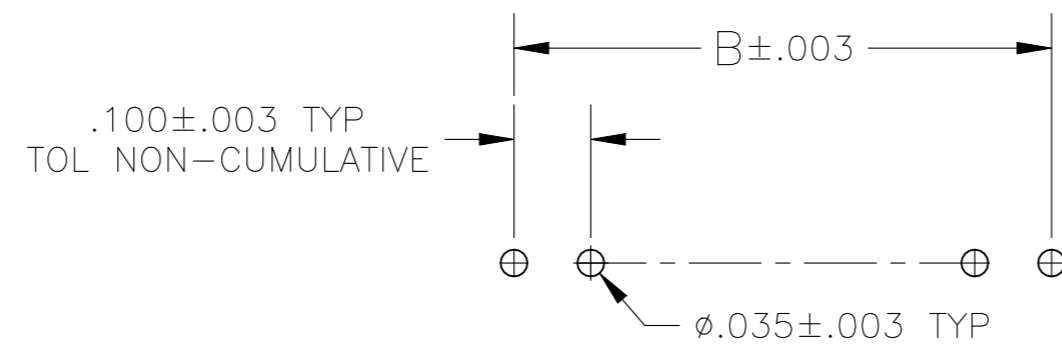


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
H1		REVISED PER ECN-22-146286	30MAR2022	RK	MF

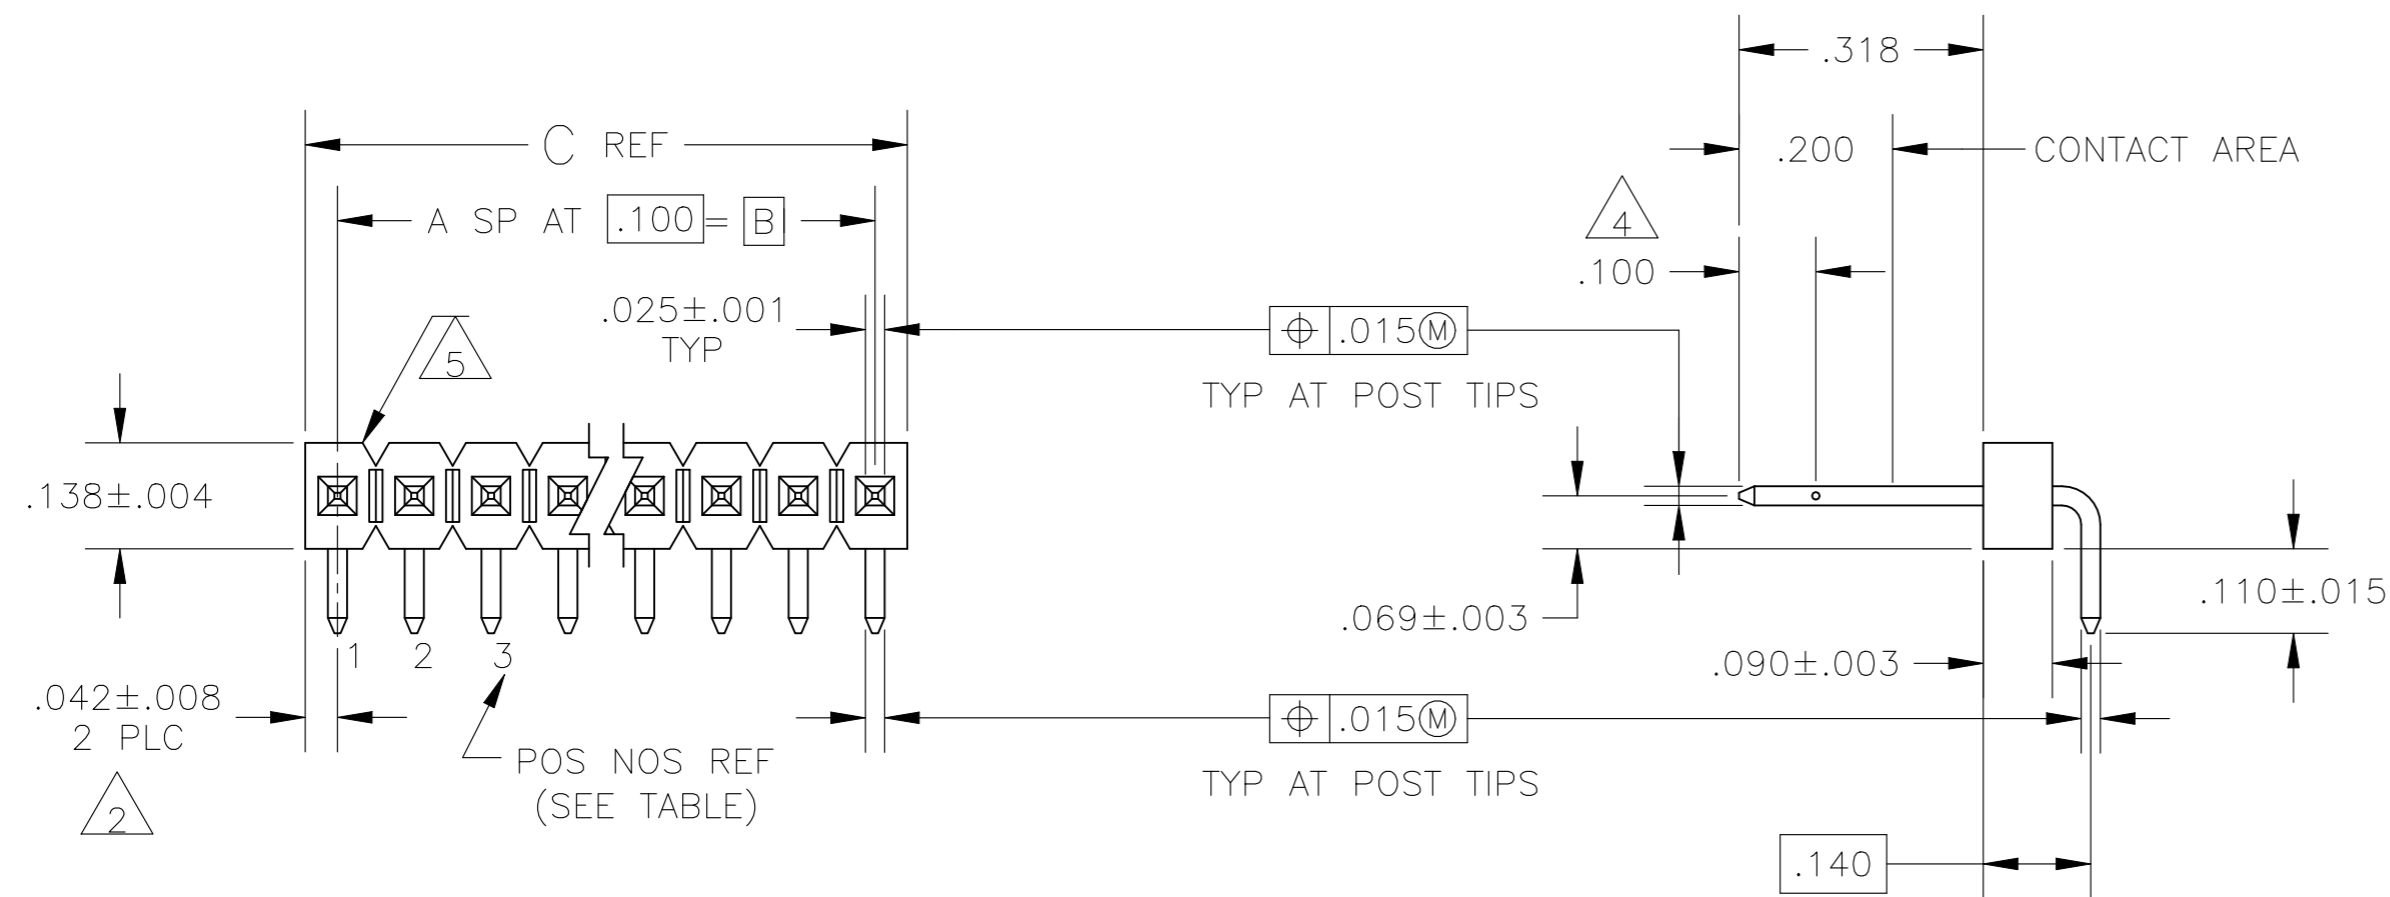

RECOMMENDED HOLE LAYOUT

- 1 ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS.
- 2 THE NOTED DIMENSIONS APPLY FROM THE BASIC DIMENSION LINE (NOT THE POST CENTERLINE) TO THE SURFACE INDICATED
- 3 .000030 GOLD IN CONTACT AREA, .000100-.000200 MATTE TIN-LEAD ON SOLDER TAIL, ALL OVER .000050 NICKEL
- 4 POINT OF MEASUREMENT FOR PLATING THICKNESS
- 5 BREAKAWAY NOTCH ANGLE CAN BE ORIENTED TO THE RIGHT (AS SHOWN) OR TO THE LEFT
- 6 .000030 GOLD IN CONTACT AREA, .000100-.000200 MATTE TIN ON SOLDER TAIL, ALL OVER .000050 NICKEL
- 7 HIGH TEMPERATURE CONFIGURATION

REMARKS	PLATING	POSTS OMITTED	C	B	A	NO OF ACTIVE POS	NO OF POS	HOUSING PART NUMBER
	7	2	.284	.200	2	2	3	5-103870-1
OBSOLETE	3	2	.284	.200	2	2	3	103870-1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN	L.A.MAYER	11NOV85
CHK	L.D.RINGLEY	12NOV85
APVD	T.J.ZOLA	13NOV85

TE Connectivity

ASSY, MOD II, HDR, B/A, RIGHT ANGLE, SR, .100 .025 SQ POSTS, SELECTIVE LOADING

SIZE	A2	CAGE CODE	00779	DRAWING NO	C=103870	RESTRICTED TO	-
SCALE	4:1	SHEET	1 OF 1	REV	H1		

CUSTOMER DRAWING