
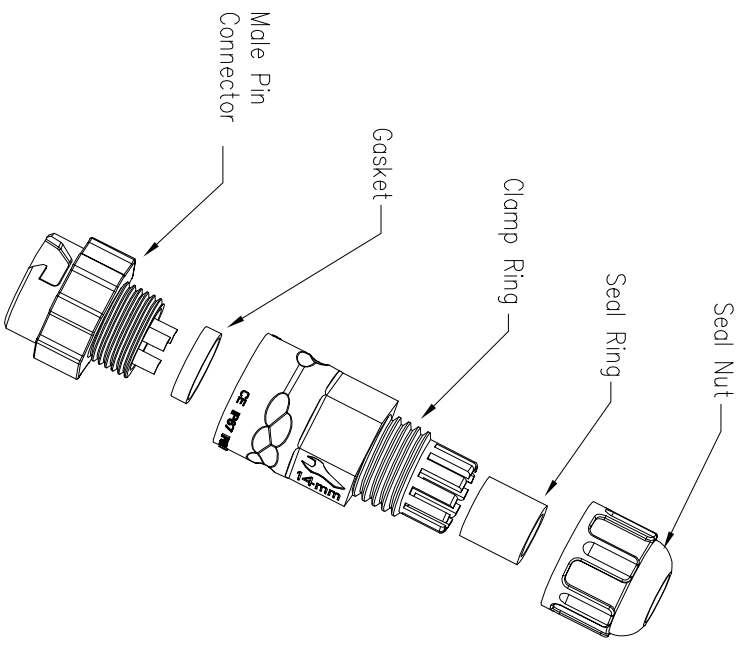
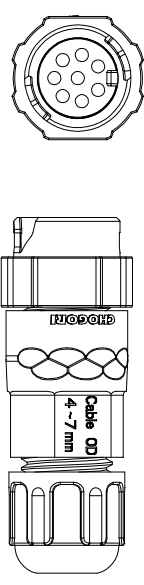


REV.	EN. NO.	DESCRIPTION	SIGN	DATE
C1	N/A	INITIAL DRAWING	Liu	2019/08/13

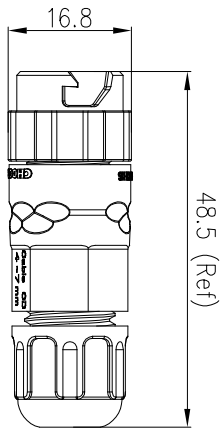


- Specification:
1. Operation Temperature: -45°C~105°C.
 2. Insulation Resistance: 100MΩ at DC500V.
 3. Contact Resistance: <10mΩ
 4. Withstand Voltage: 1300V AC
 5. Operating Current: 5A
 6. Operating Voltage: AC 60V
 7. Waterproof Rate: IP67 (Mated)
 8. Seal Nut: Nylon, Black
 9. Seal Ring: Silicon, Black
 10. Clamp Ring: Nylon, Black
 11. Gasket: Silicon, Red
 12. Male Pin: Copper Alloy, Gold Plated
 13. Connector: Nylon+GF, Black
 14. RoHS Compliant.
 15. Cable Range OD: φ3.5mm~φ6.8mm
 16. Mating Cap: 806-00062-00

22XXX331-01

Pin Number

5 Pin	6 Pin	8 Pin
P/N: 22005331-01	P/N: 22006331-01	P/N: 22008331-01

Pin Assignments Front View



DESCRIPTION
Standard Series Push Lock
Female Plug With Male Pin

UNIT: mm	SCALE: 1:1	SIZE: A4	SHEET: 1 OF 1
TOLERANCE X XX XXX ANGLES	±0.25 ±0.15 ±0.05 ±1°	REV: C1	* : Inspection Item

CHOGORI

PART NO	22XXX331-01	DRAWN BY	Liu	DATE	2019/08/13
DWG NO		CHECKED BY	Mo	DATE	2019/08/13
CUSTOMER		APPROVED BY	Panson	DATE	2019/08/13